


满装滚子轴承

索轮轴承 标准型

代码	类型	材质		附件
		国标	相当	
BPA54	标准型 索轮轴承	GCr15	SUJ2	止动环(2PCS)

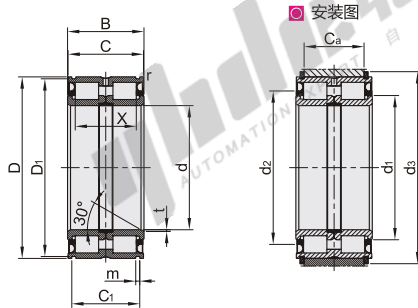

视角标准：第一视角

型号		基本额定载荷(KN)										极限转速	安装尺寸				止动环依据	重量(kg)				
代码	轴承型号	d	D	B	C	C ₁	D ₁	m	r	t	X	Cr(动)	Cor(静)	(rpm)	C _a	d ₁	d ₂	d ₃	DIN 471	参考		
BPA54	5004	20	42	30	29	24.7	40.2	1.8	0.3	0.5	22.5	33.2	40.8	3200	21.5	30.55	34	47	42×1.75	0.2		
	5005	25	47				45.2							36.8		48	2880	35.35	39	52	47×1.75	0.24
	5006	30	55	34	33	28.2	53	2.1						25.5		40	53.6	2400	25	40.6	44	60
	5007	35	62	36	35	30.2	60				27.5	50.4	70.4	2080	27	46.1	50	67	62×2	0.48		
	5008	40	68	38	37	32.2	65.8				28.5	64	88.8	1920	28	51.4	55	75	68×2.5	0.56		
	5009	45	75		40	39	34.2	72.8	2.7	0.8	30.5	77.6	111.2	1760	30	57	61	82	75×2.5	0.7		
	5010	50	80				77.8						81.6	120.8		1600	61.8	66	87	80×2.5	0.76	
	5011	55	90				87.4						96	148.8		1440	68.6	73	99	90×3	1.18	
	5012	60	95	46	45	40.2	92.4	3.2			36	100	160.8	1360	35	73.7	79	104	95×3	1.26		
	5013	65	100				97.4		1			104	172	1280		78.8	84	109	100×3	1.33		
	5014	70	110				107.1					42	140	220		84.5	91	119	110×4	1.87		
	5015	75	115	54	53	48.2	112.1						160.8	252	1120	43	89.95	97	124	115×4	1.96	
	5016	80	125		59	54.2	122.1				48	168	272	1040	49	97.1	105	137	125×4	2.71		
	5017	85	130				127.1					175.2	292	960			103.9	112	142	130×4	2.83	
	5018	90	140				137		1.5			244	408				109.3	118	152	140×4	3.71	
	5019	95	145	67	66	59.2	142	4.2			54	252	424		880	54	113.35	122	157	145×4	3.88	
	5020	100	150				147						264	440	800		117.35	128	162	150×4	3.95	
	5022	110	170			70.2	167					64	316	544	720	65	131.55	143	182	170×4	6.57	
	5024	120	180	80	79	71.2	176					328	592	720			140.9	153	196	180×4	7.04	
	5026	130	200	95	94	83.2	196		0.6	1.8		77	432	768	640		77	156.75	170	216	200×4	10.5
	4130	190	80	79	71.2	186							64	344	632		65	150.55	160	206	190×4	7.5
	5028	210	95	94	83.2	206	5.2						77	488	880		77	165.4	181	226	210×5	11.1
	4140	200	80	79	71.2	196	4.2					64	356	672	600	65	159.95	170	216	200×4	8	
	5030	225	100	99	87.2	221					2	80	568	1008		81	175.7	192	245	225×5	13.3	
	4150	210	80	79	71.2	206					1.8	64	372	736	560	65	174.4	185	226	210×5	8.4	
	5032	240	109	108	95.2	236					2	89	592	1088	520	89	189	207	260	240×5	16.6	
	4160	220	80	79	71.2	216					1.8	64	384	776	560	65	184.05	196	236	220×5	8.8	
	5034	260	122	121	107.2	254			5.2		2	100	768	1400	480	99	200.7	220	282	260×5	22.6	
	4170	230	80	79	71.2	226					1.8	64	392	824	520	65	193.9	206	250	230×5	9.3	
	5036	280	136	135	118.2	274					2	112	912	1704	440	110	217.8	239	302	280×5	30.1	
4180	240	80	79	71.2	236				1.8	64	400	864	480	65	203.1	216	260	240×5	9.8			
5038	290	136	135	118.2	284				2	112	928	1768		110	225.65	248	312	290×5	31.5			
4190	260	80	79	73.2	254				1.8	64	416	928		65	217.55	231	282	260×5	12.7			
5040	310	150	149	128.2	304	6.3			2	126	1080	2080	400	120	243.05	267	336	310×6	40.8			
4200	270	80	79	73.2	264	5.2			1.8	64	432	968	440	65	227.15	241	292	270×5	13.2			
5044	340	160	159	138.2	334	6.3					132	1256	2440		130	259.85	286	366	340×6	52.5		
4220	300	95	94	83.2	294	5.2		1	2		72	560	1240	384	75	248.7	264	322	300×5	19.5		
5048	360	160	159	138.2	354							132	1304	2640	352	130	279.25	305	386	360×6	56	
4240	320	95	94	83.2	314							72	592	1360	384	75	271.7	287	346	320×6	21	
5052	400	190	189	162.2	394			6.3	1.1		150	1904	3760	320	154	304.95	336	426	400×6	84.5		
4260	340	95	94	83.2	334				1		75	672	1592	352	75	292.7	310	366	340×6	22.5		
5056	280	420	190	189	163.2	413				3	150	2080	4160	304	154	320.95	354	453	420×7	90		
5060	300	460	218	216	185.2	453	7.3	1.1			170	2400	4640	272	176	346.85	375	493	460×7	126		



型号	轴承型号
代码	5004
BPA54	5005

BPA54-5004



数量	1~9	10~
价格	100%	另行报价



交货期
6