



# O 型圈

## S 系列 / G 系列

密封圈

C5

代码	类型	材质	硬度(肖氏)	颜色	使用温度范围	用途
XTF01	S系列	丁腈橡胶	HS65 <sup>+10</sup> <sub>0</sub>	黑色	-20~100°C	耐矿物油用
XTF02			HS85 <sup>+10</sup> <sub>0</sub>	黑色	-15~100°C	
XTF11		硅橡胶	HS45 <sup>+10</sup> <sub>0</sub>	半透明色	-40~200°C	耐高温用
XTF12			HS65 <sup>+10</sup> <sub>0</sub>	红褐色		
XTF21			HS85 <sup>+10</sup> <sub>0</sub>	黑色		
XTF22	氟橡胶	HS85 <sup>+10</sup> <sub>0</sub>	黑色	-10~200°C		
XTH01	G系列	丁腈橡胶	HS65 <sup>+10</sup> <sub>0</sub>	黑色	-20~100°C	耐矿物油用
XTH02			HS85 <sup>+10</sup> <sub>0</sub>	黑色	-15~100°C	
XTH11	G系列	硅橡胶	HS45 <sup>+10</sup> <sub>0</sub>	半透明色	-40~200°C	耐高温用
XTH12			HS65 <sup>+10</sup> <sub>0</sub>	红褐色		
XTH21		氟橡胶	HS65 <sup>+10</sup> <sub>0</sub>	黑色		

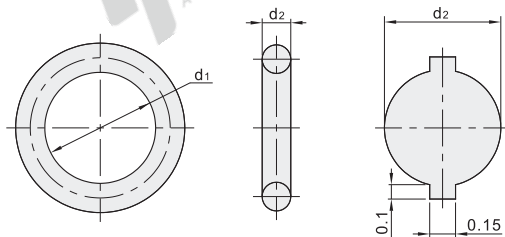

① 截面放大图

视角标准：第一视角

### S系列(JIS B 2401)

代码	规格	公称编号	d <sub>2</sub>	d <sub>1</sub>			配合尺寸		
				尺寸	XTF01 XTF02	XTF11 XTF12	XTF21 XTF22	d <sub>1</sub>	D
	3	3		2.5				3	5
	4	4		3.5				4	6
	5	5		4.5				5	7
	6	6		5.5				6	8
	7	7		6.5				7	9
	8	8		7.5				8	10
	9	9		8.5				9	11
	10	10		9.5				10	12
	11.2	11.2	1.5±0.09	10.7				11.2	13.2
	12	12		11.5				12	14
	12.5	12.5		12.0				12.5	14.5
	14	14		13.5				14	16
	15	15		14.5				15	17
	16	16		15.5				16	18
	18	18		17.5				18	20
	20	20		19.5				20	22
XTF01	22	22		21.5	±0.14	±0.44	±0.29	22	24
XTF02	22.4	22.4		21.9				22.4	25.4
XTF11	24	24		23.5				24	27
XTF12	25	25		24.5				25	28
XTF21	26	26		25.5				26	29
XTF22	28	28		27.5				28	31
	29	29		28.5				29	32
	30	30		29.5				30	33
	31.5	31.5		31.0				31.5	34.5
	32	32		31.5				32	35
	34	34		33.5				34	37
	35	35	2.0±0.09	34.5				35	37
	35.5	35.5		35.0				35.5	38.5
	36	36		35.5				36	39
	38	38		37.5				38	41
	39	39		38.5				39	42
	40	40		39.5				40	43
	42	42		41.5				42	45
	44	44		43.5				44	47
	45	45		44.5				45	48
	46	46		45.5	±0.24	±0.74	±0.49	46	49
	48	48		47.5				48	51
	50	50		49.5				50	53

### G系列(AS568)

代码	规格	公称编号	d <sub>2</sub>	d <sub>1</sub>			配合尺寸		
				尺寸	XTH01 XTH02	XTH11 XTH12	XTH21	d <sub>1</sub>	D
	25	G25		24.4	±0.24	±0.37	±0.29	25	30
	30	G30		29.4	±0.28	±0.43	±0.34	30	35
	35	G35		34.4	±0.32	±0.49	±0.39	35	40
	40	G40		39.4	±0.36	±0.55	±0.44	40	45
	45	G45		44.4	±0.40	±0.61	±0.49	45	50
XTH01	50	G50		49.4	±0.44	±0.67	±0.53	50	55
XTH02	55	G55		54.4	±0.48	±0.73	±0.58	55	60
XTH11	60	G60	3.1±0.09	59.4	±0.52	±0.79	±0.63	60	65
XTH12	65	G65		64.4	±0.56	±0.85	±0.68	65	70
XTH21	70	G70		69.4	±0.60	±0.91	±0.73	70	75
	75	G75		74.4	±0.64	±0.97	±0.77	75	80
	80	G80		79.4	±0.68	±1.03	±0.82	80	85
	105	G105		104.4	±0.86		±0.86	105	110
	120	G120		119.4	±0.97		±0.97	120	125
	145	G145		144.4	±1.15		±1.15	145	150
	170	G170	5.7±0.09	169.3	±1.32		±1.32	170	180

### G系列(AS568)

☎ 请按图示订货

型号	公称编号
XTH01	25
XTH02	30

XTH01—25

● 优惠价

数量	1~9	10~
价格	100%	另行报价

未标价(元)

🚚 交货期

5

