



塑料轴承

无防尘盖式

代码	材质			推荐使用温度
	套圈	保持架	球体	
BAV	POM	PA66	碳酸钠玻璃	-60°C~100°C

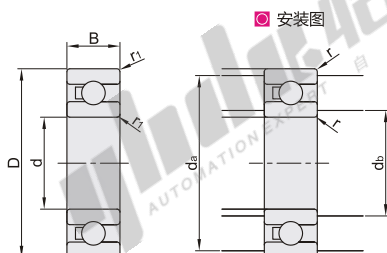

① POM为绝缘材质，如需防静电，请选择POM材质。



代码	型号 轴承型号	d	D	B	r1	安装尺寸			参考重量 (g)
						db(min)	da(max)	r(max)	
BAV	693	3	8		0.15	4.2	6.8	0.15	0.1
	694	4	11	4		5.2	9.8		0.3
	695	5	13			6.6	11.4		0.5
	696	6	15		0.2	7.6	13.4	0.2	0.7
	697	7	17	5		9	15		1
	698	8	19			10	17		1.4
	699	9	20	6	0.3	11	18	0.3	1.6
	6800		19	5			17		1
	6900		22	6		12	20		1.7
	6000	10	26	8			24		3.5
	6200		30	9	0.6		26	0.6	6
	6801		21	5	0.3		19	0.3	1.2
	6901		24	6		14	22		1.9
	6001	12	28	8			26		4
	6201		32	10	0.6	16	28	0.6	7
	6802		24	5	0.6		22	0.6	1.3
	6902		28	7		17	26		3
	6002	15	32	9			30		6
	6202		35	11	0.6		31	0.6	9
	6803		26	5	0.3		24	0.3	1.3
	6903		30	7		19	28		3.3
	6003	17	35	10			33		8
	6203		40	12	0.6	21	36	0.6	13
	6804		32	7	0.3		30	0.3	3
	6904		37	9		22	35		57
	6004	20	42	12	0.6		38	0.6	13
	6204		47	14	1	25	42	1	21
	6805		37	7	0.3		35	0.3	1
	6905		42	9		27	40		10
	6005	25	47	12	0.6	29	43	0.6	15
	6205		52	15	1	30	47	1	25
	6806		42	7	0.3		40	0.3	5
	6906		47	9		32	45		10
	6006	30	55	13			50		22
	6206		62	16	1	35	57	1	38
	6807		47	7	0.3	37	45	0.3	5
	6907		55	10	0.6	39	51	0.6	14
	6007	35	62	14	1	40	57		29
	6207		72	17	1.1	41.5	65.5	1	55
	6808		52	7	0.3	42	50	0.3	6
	6908		62	12	0.6	44	58	0.6	22
	6008	40	68	15	1	45	63		37
	6208		80	18	1.1	46.5	73.5	1	70
	6809		58	7	0.3	47	56	0.3	38
	6909		68	12	0.6	49	64	0.6	24
	6009	45	75	16	1	50	70		46
	6209		85	19	1.1	51.5	78.5	1	81
	6810		65	7	0.3	52	63	0.3	10
	6910		72	12	0.6	54	68	0.6	26
	6010	50	80	16	1	55	75		50
	6210		90	20	1.1	56.5	83.5	1	88



请按图示订货

型号		d	D	B
代码	轴承型号			
BAV	693	3	8	
	694	4	11	4

BAV693



未税价(元)

● 优惠价

数量	1~19	20~
价格	100%	另行报价



交货期

7