


法兰型导向轴支座 /T 型导向轴支座

■ 法兰型导向轴支座


代码	类型		材质	
			国标	相当
Y-FAC06	标准型	安装孔通孔	0Cr18Ni9	SUS304
Y-FAC16				
Y-FAC26				

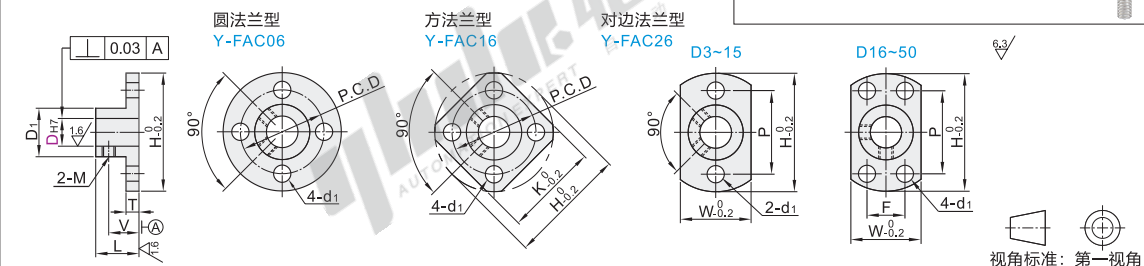

代码	型号	L	D ₁	H	T	V	P.C.D	K	W	P	F	d ₁	M
圆法兰型 Y-FAC06	3	10	7.8	22	3		15	16	8	15			
	4	12	8.8	24	3	8	17	19	9	17			
	5	15	9.8	25	3.5		18	20	10	18		3.5	M3
	6	16		28			20	22	12				
	8M	20	11.8	30	5	11	22	23	16	20	—	4.5	M4
	10		13.8	36			26	28	18	22		3.5	M3
	10M	24	15.8	38			28	30	20	26			
	12	30	17.8	40	6	16	30	32	22	28		4.5	M4
	15	32	19.8	42			32	33	24	30			
	16	38	21.8	55	8	21	39	39	26	28	16		
方法兰型 Y-FAC16	13	24	15.8	36			26	28	20	26			
	15	30	17.8	40	6	16	30	32	22	28		4.5	M4
	16	32	19.8	42			32	33	24	30			
	18	38	21.8	55	8	21	39	39	26	28	16		
	20	44	23.8	66			42	44	28	32			
	25	50	27.8	80	10	32	45	47	30	36			
	30		31.8	90			50	52	32	40			
	35		36.8	100			55	57	34	42			
	40		41.8				60	62	36	44			
	50		51.8				70	72	38	46			
对边法兰型 Y-FAC26	18	32	19.8	42			32	33	24	30			
	20	38	21.8	55	8	21	39	39	26	28	16		
	25	44	23.8	66			42	44	28	32			
	30	50	27.8	80	10	32	45	47	30	36			
	35		31.8	90			50	52	32	40			
	40		36.8	100			55	57	34	42			
	45		41.8				60	62	36	44			
	50		46.8				65	67	38	46			
	55		51.8				70	72	40	48			
	60		56.8				75	77	42	50			

■ T型导向轴支座

代码	类型		材质		附件
			国标	相当	
Y-FAD06	无定位孔	H选择型	0Cr18Ni9	SUS304	1个内六角圆柱头螺钉(不锈钢)
Y-FAD16		H指定型			
Y-FAD26	带定位孔	H选择型			

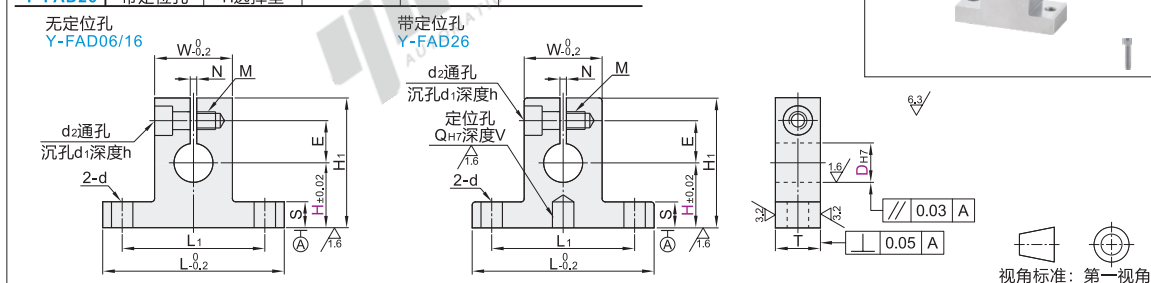

代码	型号	选择型	指定型	L	H ₁	T	S	W	L ₁	d	E	M	d ₁	d ₂	h	N	Q	V
无定位孔 Y-FAD06 Y-FAD16	3	10 15 20	10.0~20.0	26	H+11	8	3.8	9.8	18	3.5	7	M3贯通	6.5	3.5	3.5	1.5	—	—
	4	10 15 20 25	10.0~25.0		H+12						8							
	5	(10) 15 20 25 30 40	10.0~40.0	42	H+16			17.8	30		11	M4贯通						
	6	(10) 15 20 25 30 40	10.0~40.0		H+18	10	5.8			4.5	13	M4贯通	8	4.5	4.5		4	5
	8	15 20 25 30 40	15.0~40.0	54	H+20			29.8	42		15	M4深8				2		
	10	15 20 25 30 40 50	15.0~40.0															
	12	20 25 30 40 50 60	20.0~60.0	67	H+26	16	7.8	34.8	50	6.6	18	M6贯通	11	6.6	6.5			
	15	(20) 25 30 40 50 60	20.0~60.0		H+28						21							
	16	(20) 25 30 40 50 60	20.0~60.0	85	H+33	20	9.8	44.8	65	9	24	M8深16	14	9	9		5	7
	18	(25) 30 40 50 60	25.0~60.0		H+36						27							
带定位孔 Y-FAD26	20	30 40 50 60 80	30.0~80.0	100	H+38			59.8	80		29							
	25	40 50 60 80	40.0~80.0	125	H+51	25	14.8	74.8	100	14	38	M12深25	20	14	13			
	30																	
	35																	
	40																	
	45																	
	50																	
	55																	
	60																	
	65																	

① 带 () 的H尺寸不适用带定位孔型。

■ 法兰型导向轴支座

代码	型号	选择型
Y-FAC06	3	10 15 20
Y-FAC16	4	10 15 20 25
Y-FAC26	5	10 15 20 25 30 40

■ T型导向轴支座(H选择型)

代码	型号	选择型
Y-FAD06	3	10 15 20 25
Y-FAD16	4	10 15 20 25 30 40
Y-FAD26	5	10 15 20 25 30 40 50 60

■ T型导向轴支座(H指定型)

代码	型号	指定型
Y-FAD06	3	10.0~20.0
Y-FAD16	4	10.0~25.0
Y-FAD26	5	10.0~40.0



请按图示订货



数量	1~9	10~
价格	100%	另行报价