


免键胀套

直杆型·ZJ2型 国标

代码	类型	国标系列	材质	表面处理
EUX66	直杆型	ZJ2型	S45C	-
EUX67				无电解镀镍

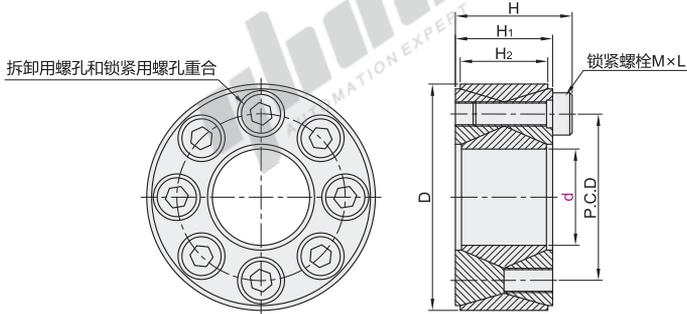

轴及轮孔部的推荐公差、表面粗糙度

安装面	公差	表面粗糙度
轴外径	h7(g6)	Ra1.6以下
轮孔部内径	H7	Ra3.2以下

视角标准：第一视角

型号		D	H	P.C.D	H ₁	H ₂	锁紧螺栓				容许最大扭矩(N·m)	容许轴向负载(KN)	重量(g)		
代码	d						M×L	个数	内六角扳手公称尺寸	紧固扭矩(N·m)					
EUX66 EUX67	20	47		34.5									300	29.5	240
	22												330		230
	24												410		250
	25												430		240
	28	55	26	42.5	20	17	M6×L18	10	5	12.7			530	37.8	290
	30												570		280
	32												730		340
	35	60		47.5									800	45.4	310
	EUX67 38												1010		370
	40	75		60									1060	52.9	350
	42												1560		600
	45												1670		570
	48												1780		74.1
	50	80	32	65	24	20	M8×L22		6	29.4			1860	91.8	610
	55												2530		660
	60												2760		700
65	2990												710		



请按图示订货

型号	
代码	d
EUX66	22
EUX67	24

EUX66—d24



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

5

