


定位销

圆型•P.B尺寸固定型

大头平头型 D公差n6

P.B尺寸固定型	材质		硬度	表面处理
Dn6	国标	相当		
YBR72	9CrWMn	SKS3	淬火硬度58HRC~	镀硬铬，镀层厚度3~5μm
YBR77	Cr12MoV	SKD11		—

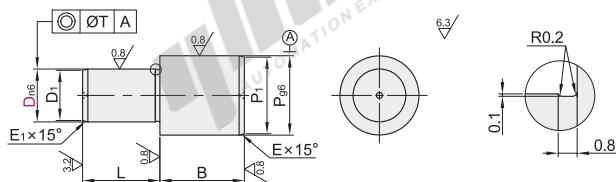

① $D_1 = D - E_1 \cdot \tan 15^\circ$; $P_1 = P - E \cdot \tan 15^\circ$

② 工艺孔加工条件: $D \neq P$ 且 $(D \cdot P \cdot L \cdot B) \geq 4$ 。(工艺孔详细尺寸见产品简介)



型号		P _{g6}		L	B		E	E ₁	T
代码	D _{n6}								
YBR72 YBR77	4	+0.016 +0.008	6	-0.004 -0.012	6	5	1	1.2	0.02
	6		10	-0.005 -0.014	9	6		1.6	
	8	+0.019 +0.010	16	-0.006 -0.017	12	8		2	0.04
	12	+0.023 +0.012	25	-0.007 -0.020	18	10		2.5	



请按图示订货

型号	代码	D
YBR72	4	
YBR77	6	

YBR72—D6



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

5