


粗牙 ▶
强度等级10.9

半螺纹六角头螺栓

代码	类型	螺纹	强度等级	材质	表面处理
TAH91	半牙	粗牙	10.9	ML40Cr	发黑

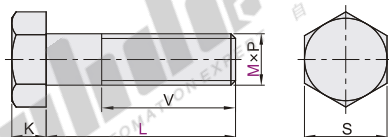

视角标准：第一视角

① 适用标准：GB/T 5782-2016

型号	L										V	P	S	K
代码	M											螺距		
TAH91	8	60 65 70 75 80 85 90 100									22	1.25	13	5.3
											28			
	10	45 50 55 60 65 70 75 80 85 90 100 120	150								26	1.5	16	6.4
											32			
	12	50 55 60 65 70 75 80 85 90 110 120	130 150								30	1.75	18	7.5
											36			
	14	60 65 70 75 80 85 90 100 110 120	130 140 150 160 170 190								34		21	8.8
											40	2		
	16	50 55 60 65 70 75 80 85 90 100 110 120	130 140 150 160 170 180 190 200								38		24	10
											44			
	18	60 65 70 75 80 85 90 100 110 120	130 140 150 160 170 200								42		27	11.5
											48			
	20	60 65 70 75 80 85 90 100 110 120	130 140 150 160 170 200								46	2.5	30	12.5
											52			
	22	70 80 90 100 110 120	130 140 150 160 180 200								50		34	14
											56			
	24	70 75 80 90 100 110 120	130 140 150 160 180 190 200								54		36	15
											60	3		
	27	80 90 100 110 120	130 140 150 160 170 180 190 200								60		41	17
											66			
	30	80 90 100 110 120	130 140 150 160 170 180 190 200								66	3.5	46	19
											72			
	36		130 140 150 160 170 180 190 200								84	4	55	22.5
	42		130 140 150 160 170 180 190 200								96	4.5	65	26



请按图示订货

型号	M	L
代码	TAH91	36 42 130 140 150 160

TAH91—M36—L140



未税价(元)

● 优惠价

数量	1~45	46~
价格	100%	另行报价



交货期

7