

角接触球轴承


双列组合型 背对背配对型



C&U



安装图

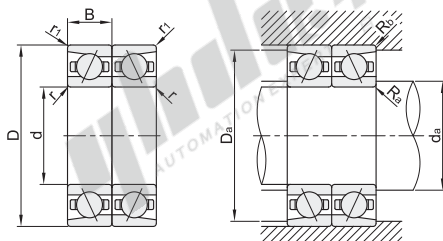

视角标准：第一视角

型号	主要尺寸(mm)					基本额定载荷(KN)		极限转速(rpm)		安装相关尺寸(mm)				重量(g)
	d	D	B	r(min)	r ₁ (min)	Cr(动)	Cor(静)	脂润滑	油润滑	d _a (min)	D _a (max)	R _a (max)	R _b (max)	
7000AC/P5DB-C&U	10	26	8	0.3	0.15	8.33	4.82	30000	40000	12.5	24.5	0.3	0.15	46
7001AC/P5DB-C&U		28	8	0.3	0.15	9.04	5.58	27000	36000	14.5	26.5	0.3	0.15	50
7201AC/P5DB-C&U	12	32	10	0.6	0.3	12.41	7.46	25200	33600	17	29.5	0.6	0.3	70
7201B/P5DB-C&U						12.04	8.62	16200	21600					72
7301B/P5DB-C&U		37	12	0.3	0.6	14.32	8.38	16600	20800	18	33.5	1	0.5	90
7002C/P5DB-C&U	15	32	9	1	0.15	10.11	6.78	27000	36000	17.5	30.5	0.3	0.15	70
7002AC/P5DB-C&U						9.67	6.48	22800	30400					
7202AC/P5DB-C&U						11.97	7.8	22200	29600			20	32.5	92
7202B/P5DB-C&U						12.85	8.62	14400	19200					94
7003C/P5DB-C&U	17	35	10	0.3	0.15	10.71	7.62	24000	32000	19.5	33.5	0.3	0.15	90
7203AC/P5DB-C&U						10.21	7.3	21000	28000					92
7203AC/P5DB-C&U						17.01	11.32	19200	25600			22	37.5	128
7203B/P5DB-C&U						16.09	11.08	12600	16800					132
7303AC/P5DB-C&U	20	47	14	1	0.6	24.62	15.98	16200	21600	23	43.5	1	0.5	214
7303B/P5DB-C&U						23.98	16.04	12000	16000					218
7004C/P5DB-C&U	20	42	12	0.6	0.3	17.98	13.12	20400	27200	25	39.5	0.6	0.3	158
7004AC/P5DB-C&U						17.17	12.54	17400	23200					160
7204C/P5DB-C&U						23.49	16.1	19200	25600			26	43.5	196
7204AC/P5DB-C&U						22.68	15.54	16200	21600					200
7204B/P5DB-C&U		47	14	1	0.6	21.55	15.26	10800	14400					204
7005AC/P5DB-C&U	25	47	12	0.6	0.3	17.98	14.16	15000	20000	30	44.5	0.6	0.3	186
7006C/P5DB-C&U	30	55	13	1	0.6	24.46	20.5	15000	20000	36	51.5	1	0.5	266
7206B/P5DB-C&U	30	62	16	1	0.6	33.21	27	7800	10400	36	58.5	1	0.5	394



请按图示订货

型号

7206B/P5DB-C&U



未税价(元)

优惠价

数量	1~9	10~
价格	100%	另行报价



交货期

10

