


品牌	轴承类型代码	轴承精度	轴承游隙	后置代码	轴承材质	
					国标	相当
ZWZ	6	GB/T 307.1 0级	标准游隙(C0)	未标注: 钢 M: 黄铜	GCr15	SUJ2

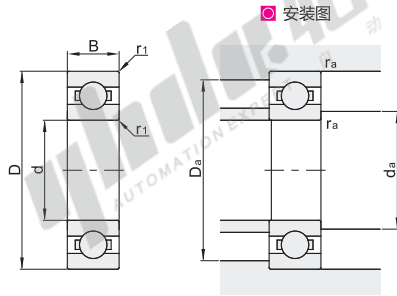

安装图

出厂前未封入润滑脂, 请在使用前封入。

视角标准: 第一视角

型号	d	D	B	r1 (min)	基本额定负载(KN)		极限转速(r/min)		安装尺寸			重量(Kg)参考		
					Cr(动)	Cor(静)	脂润滑	油润滑	da (min)	Da (max)	ra (max)			
6200-ZWZ	10	30	9	0.6	6.5	3	24000	30000	14	26	0.6	0.03		
6001-ZWZ	12	28	8	0.3	5.18	2.26	26000	—	16	28	0.3	0.02		
6201-ZWZ		32	10	6.5	3	22000	28000							
6202-ZWZ	15	35	11	0.6	8	4	19000	24000	19	31	0.6	0.04		
6203-ZWZ	17	40	12		9.1	5	17000	20000	21	36				
6004-ZWZ	20	42	14	1	9.4	6.7	15000	19000	23.2	38.8	1	0.11		
6204-ZWZ		47			13.8	6.9	13000	16000	25	42				
6304-ZWZ		52	15		4.2	2.64	16000	19000	27	35			0.3	0.04
61805-ZWZ		37	7		7.3	4.55	14000	17000	40	45				
61905-ZWZ	25	42	9	0.3	8	5	14000	17000	40	45	0.6	0.08		
16005-ZWZ		47	8	11.4	6.28	15000	18000	29	43					
6205-ZWZ	30	52	15	1	14.3	8	12000	15000	30	47	1	0.13		
6305-ZWZ		62	17	1.1	22.4	11.5	11000	14000	31.5	55.5				
6405-ZWZ		80	21	1.5	37.5	19	9000	11000	33	72			1.5	0.53
61906-ZWZ		47	9	0.3	7.5	4.95	14000	17000	32	45			0.3	0.04
16006-ZWZ	55	13	1	10.6	6.75	12000	15000	34.6	53					
6006-ZWZ				62	16	19.5	11.3	10000	13000	35	57	1	0.22	
6206-ZWZ	35	72	19	1.1	28.4	15.4	9000	11000	36.5	65.5	1.5	0.35		
6306-ZWZ		90	23	1.5	44.5	23	8500	10000	38	82			1.5	0.81
6406-ZWZ		47	7	0.3	3.9	3	13000	16000	37	45			0.3	0.03
61807-ZWZ		55	10	0.6	9.35	6.7	11000	14000	38.2	51.8			0.6	0.08
61907-ZWZ	40	62	14	1	16	10.3	10000	13000	40	57	1	0.15		
6007-ZWZ		72	17	1.1	26	14.7	9000	11000	41.5	65.5				
6207-ZWZ		80	21	1.5	33.4	19.2	8500	10000	43	72			1.5	0.46
6307-ZWZ		100	25	1.5	55.5	29.5	7000	8500	43	92			1.5	0.92
6407-ZWZ	45	62	12	0.6	13	9.2	10000	13000	43.2	58.8	0.6	0.11		
61908-ZWZ		68	15	1	16.8	11.6	9500	12000	44.6	63.4	1	0.19		
6008-ZWZ		80	18	1.1	31.2	18.2	8500	10000	46.5	73.5	1	0.37		
6208-ZWZ		90	23	1.5	41	24	7500	9000	48	82	1.5	0.64		
6308-ZWZ	50	110	27	2	67.5	36	6700	8000	49	101	2	1.20		
6408-ZWZ		58	7	0.3	6.5	5	9500	12000	47	56	0.3	0.04		
61809-ZWZ		75	10	0.6	14.9	11.4	9000	11000	49	71	0.6	0.17		
16009-ZWZ		16	1	20	14	7500	9000	50	70	1	0.25			
6009-ZWZ	55	85	19	1.1	33.7	20.7	7500	9000	51.5	78.5	1	0.43		
6209-ZWZ		100	25	1.5	52.5	30	6700	8000	53	92	1.5	0.85		
6309-ZWZ		120	29	2	73	43	6000	7000	54	111	2	1.59		
6409-ZWZ		72	12	0.6	13.9	11	8500	10000	53.2	68.8	0.6	0.13		
61910-ZWZ	60	80	16	1	22	16.3	6500	7500	55	75	1	0.26		
16010-ZWZ		90	20	1.1	35.6	22.3	7100	8500	56.5	83.5	1	0.47		
6010-ZWZ		110	27	2	62	38	6300	7500	59	101	2	1.12		
6210-ZWZ		130	31	2.1	88	52	5300	6300	61	119	2	1.91		
6310-ZWZ	120	165	22	1.1	53	54	3600	4300	126.5	158.5	1	1.54		
6410-ZWZ		165	22	1.1	53	54	3600	4300	126.5	158.5	1	1.54		



型号
6410-ZWZ
61924M-ZWZ



● 优惠价
数量 1-29 30-
价格 100% 另行报价



- 总目录
- 目录
- 使用说明
- 螺钉
- 螺栓
- 螺柱
- 铆接类
- 组合件
- 螺母
- 垫圈
- 挡圈
- 树脂类
- 带挡块螺钉
- 柱塞
- 紧固件进口专区
- 紧固件专用配件
- 经济型轴承
- 标准型轴承
- 进口型轴承
- 品牌轴承
- 带座轴承
- 吊环
- 索具
- 电子焊接工具
- 手动工具
- 电动工具
- 气动工具
- 储存工具
- 量具
- 刀具
- 技术资料