

风扇


经济型 · AC轴流风扇

| 代码 | 类型 | 材质 | 轴承 | 预期寿命 |
|-------|------|-----|-----|--------------|
| ZHJ07 | 轴流风扇 | AC型 | PBT | 50000H(25°C) |


CE




外形尺寸: 80

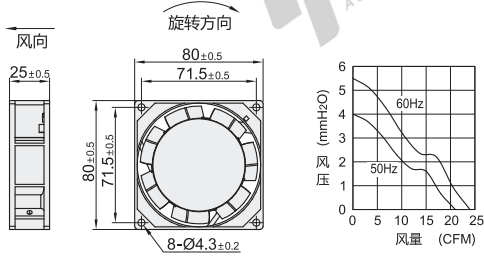


外形尺寸: 92

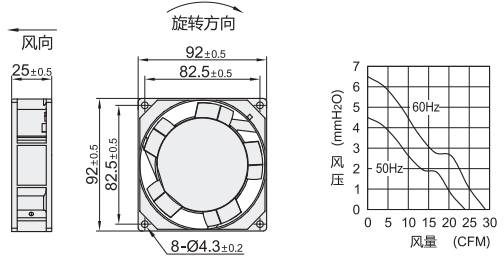


外形尺寸: 120B

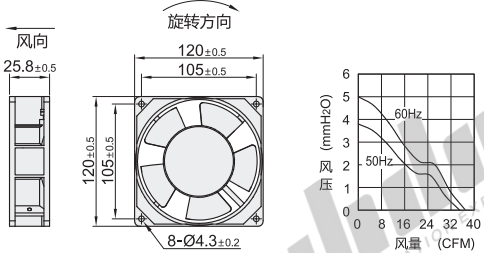


外形尺寸: 120

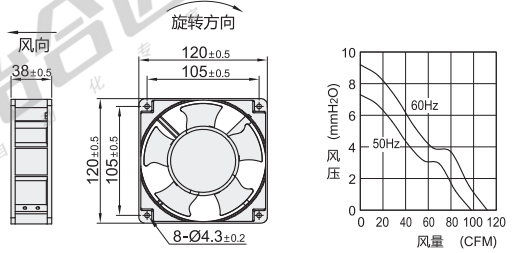


外形尺寸: 150

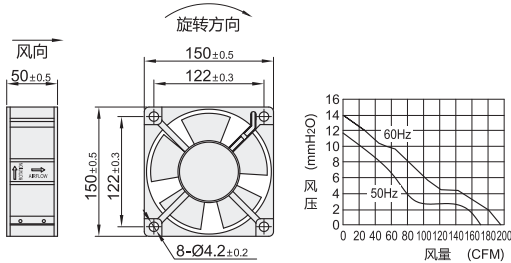



外形尺寸: 172

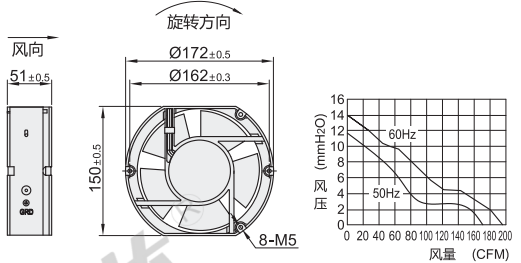

外形尺寸: 200

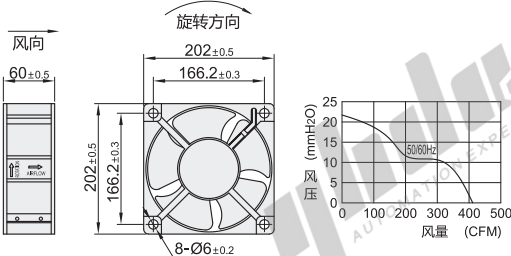


外形尺寸: 220

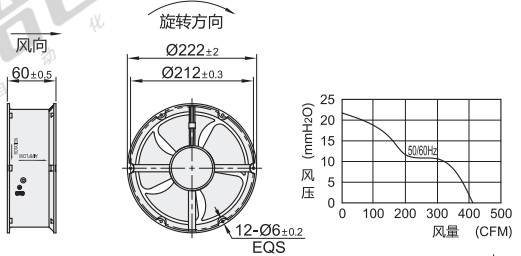


视角标准: 第一视角


外形尺寸: 225

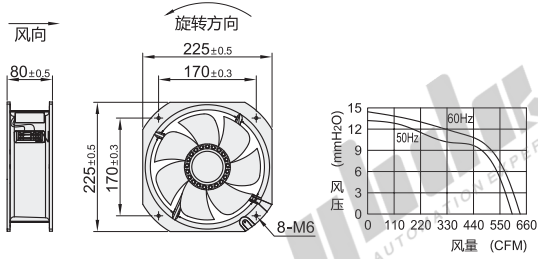


外形尺寸: 254

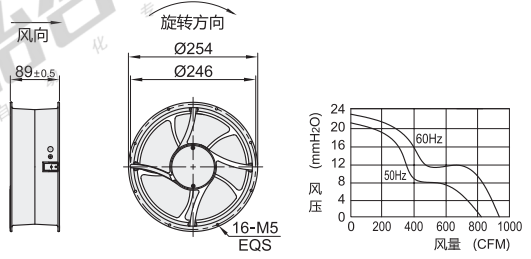

外形尺寸: 280

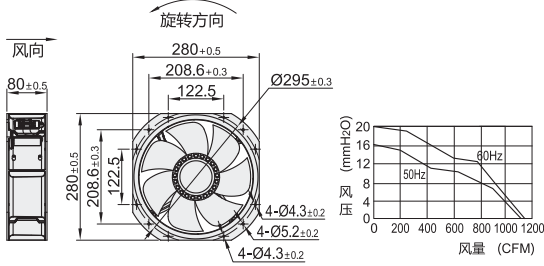

外形尺寸: 340

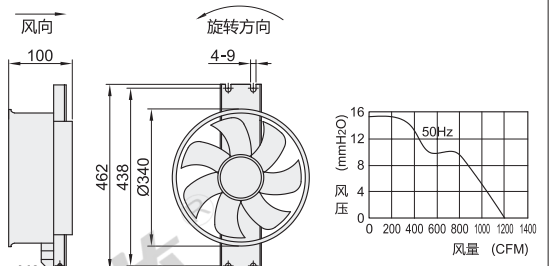

视角标准: 第一视角

散热风扇

| 型号 | 适配附件 | 长×宽×高 (mm) | 输入电压 | 频率 (Hz) | 功率 (W) | 电流 (A) | 转速 (RPM) | 风量 (CFM) | 风压 (mm-H ₂ O) | 噪音 (Db[A]) | 重量 (g) | |
|-------|----------|--------------|------|------------|--------|-----------|-----------|-----------|--------------------------|------------|--------|------|
| ZHJ07 | | 80×80×25 | | | 16/12 | 0.08/0.07 | 2550/2900 | 25/29 | 3.31/4.44 | 34/37.2 | 210 | |
| | | 92×92×25 | | | | | 2450/2800 | 25/28.57 | 3.5/4.57 | 36/38.9 | 236 | |
| | | 120×120×25.8 | | | | 0.11/0.1 | 2100/2200 | 36/37.71 | 2.2/2.41 | 35/36 | 275 | |
| | | 120×120×38 | | | | 0.13/0.11 | 2650/2950 | 85/98 | 6.4/7 | 45/48 | 432 | |
| | 防护网ZHJ42 | 150×150×50 | | | | | | | | | 830 | |
| | 过滤网ZHJ41 | 172×150×51 | | | 50/60 | 38/36 | 0.25/0.23 | 2600/2300 | 168/149 | 10.5/9.2 | 48/45 | 850 |
| | 或 | 200×200×60 | | AC220/240V | | | | | | | | |
| | 百叶窗ZHJ43 | Ø222×60 | | | | 45/48 | 0.32/0.35 | 2600/3000 | 400/470 | 13.0/15.2 | 61/65 | 1500 |
| | | 225×225×80 | | | | 75/85 | 0.32/0.4 | 2600/2800 | 560/680 | 16.5/20.0 | 60/64 | 2100 |
| | | 254×254×89 | | | | 50/65 | 0.22/0.28 | 2750/3000 | 750/920 | 17.2/19.5 | 58/62 | 2000 |
| | | 280×280×80 | | | | 100/120 | 0.45/0.5 | 2600/2800 | 1059/1130 | 16.5/20.0 | 68/70 | 2800 |
| | | 462×102×100 | | | 50 | 150 | 0.5 | 2200 | 1240 | 11.5 | 73 | 3550 |

① 适用配件防护网/过滤网详见P291, 百叶窗详见P293.



| 型号 | |
|-------|------|
| 代码 | 外形尺寸 |
| ZHJ07 | 80 |
| | 92 |

ZHJ07-80

