


圆皮带用惰轮


◀ 双联型

代码	类型	材质		表面处理	附件
		国标	相当		
ENW01	双联型	铝合金		喷细砂本色阳极氧化	挡圈 (SUS304)
ENW11		0Cr18Ni9	SUS304	—	

- ① 特殊环境(洁净环境等)要求如需更换密封轴承请联系怡合达。
② 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。

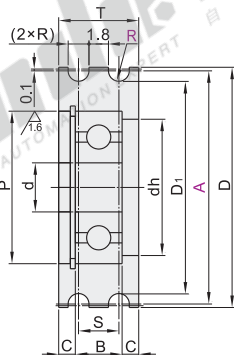

轴承精度：GB/T 307.1 0 级
相当于：JIS B 1514 0 级



视角标准：第一视角

① 轴承采用压入式。

型号		R	S	d	P	dh	D	D ₁	T	B	C	使用轴承	适用圆皮带直径
代码	A												
ENW01 ENW11	15	1.1	4	3	10	8	17	13	9	4		BAF623ZZ	2
	20			4	13	11	22	18	10	5	2.5	BAF624ZZ	
	30			6	19	16	32	28	11	6		BAF626ZZ	
	20			4	13	11	22	17	11	5	3	BAF624ZZ	
	30	1.6	5	6	19	16	32	27		6	2.5	BAF626ZZ	3
	40			10	26	23	42	37		8	3	BAY6000ZZ	
	45						47	42	14				
	23				15	13	25	19		5	4	BAF696ZZ	
	28	2.1	6	6	19	16	30	24	13	6	3.5	BAF626ZZ	4
	30						32	26					
	40						42	36					
	45			10	26	23	47	41	14	8	3	BAY6000ZZ	
	48	2.6	7				50	44					5
	28			8	19	16	30	23	15	6	4.5	BAF698ZZ	
	40			10	26	23	42	35		8	4	BAY6000ZZ	
	50			12	32	27	52	45	16	10	3	BAY6201ZZ	
	28	3.1	8	6	19	16	30	22	17	6	5.5	BAF626ZZ	6
	38			10	26	23	40	32		8	5	BAY6000ZZ	
	48						50	42					
	50						52	44	18				
	60	4.1	10	12	32	27	62	54		10	4	BAY6201ZZ	8
	75						77	69					
	100						102	94					
	50			12	32	27	52	42		10	5.5	BAY6201ZZ	
	60	5.1	12	15	35	30	62	52	21	11	5	BAY6202ZZ	10
	100						102	92					
	60						62	50					
	100			15	35	30	102	90	25	11	7	BAY6202ZZ	
	140						142	130					



型号		R	S
代码	A		
ENW01	20	1.6	5
ENW11	30		

ENW11 — A30 — R1.6



● 优惠价	数量	1~9	10~
	价格	100%	另行报价



交货期	1
-----	---