


压铆螺母


代码	类型	螺纹	材质	
			国标	相当
Y-JAE05	压铆螺母	粗牙	0Cr18Ni9	SUS304



RoHS

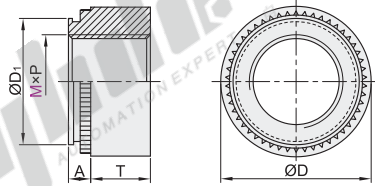

EX
Example
使用示例

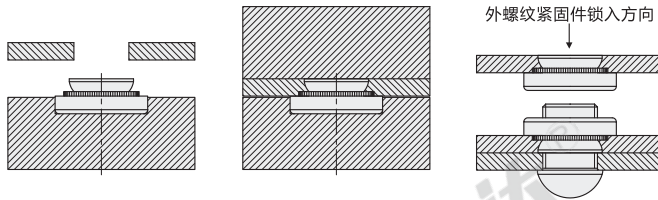

视角标准：第一视角

型号	M	安装板厚度	P 螺距	A	安装板孔径 +0.08	D	D1	T	孔中心到安装板 边缘最小距离
Y-JAE05	2.5	0.8	0.45	0.77	4.22	6.3	4.2	1.5	4.8
		0.8		0.77					
	3	1	0.5	0.97	4.75	7.1	4.73		5.6
		1.4		1.38					
	3.5	1	0.6	0.97	5.41	7.9	5.38		6.9
		0.8		0.77					
	4	1	0.7	0.97	6.35	8.7	6.33	2	7.1
		1.4		1.38					
	5	0.8	0.8	0.77	8.75	11.05	8.72	4.08	8.6
		1		0.97					
	6	1.4	1.0	1.38	10.5	12.65	10.47	5.47	9.7
		2.3		2.21					
	8	1.4	1.25	1.38	14	17.35	13.97	7.48	13.5
		2.3		2.21					
	10	2.3	1.5	2.21					
		3.2		3.05					



请按图示订货

型号	M	安装板厚度
Y-JAE05	3	1.4

Y-JAE05-M3-1



未税价(元)

优惠价

数量	1~100	101~
价格	100%	另行报价