

圆皮带用惰轮

◀ 双联型


代码	类型	材质		表面处理	附件
		国标	相当		
ENW01	双联型	LF2	A5052	喷细砂本色阳极氧化	挡圈 (SUS304)
ENW11		0Cr18Ni9	SUS304	—	

① 特殊环境(洁净环境等)要求如需更换密封轴承请联系怡合达。


② 3D模型仅供参考，具体尺寸请以参数表为准，注意选型。



轴承精度：GB/T 307.1 0 级
相当于：JIS B 1514 0 级

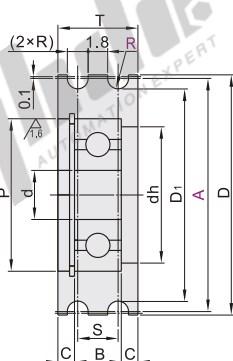

① 轴承采用压入式。



视角标准：第一视角

型号		R	S	d	P	dh	D	D ₁	T	B	C	使用轴承	适用 圆皮带直径
代码	A												
ENW01 ENW11	15			3	10	8	17	13	9	4		BAF623ZZ	2
	20	1.1	4	4	13	11	22	18	10	5	2.5	BAF624ZZ	
	30			6	19	16	32	28	11	6		BAF626ZZ	
	20			4	13	11	22	17	11	5	3	BAF624ZZ	3
	30	1.6	5	6	19	16	32	27		6	2.5	BAF626ZZ	
	40			10	26	23	42	37		8	3	BAY6000ZZ	
	45						47	42	14				4
	23				15	13	25	19		5	4	BAF696ZZ	
	28			6	19	16	30	24	13		6	3.5	BAF626ZZ
	30	2.1	6				32	26					5
	40						42	36					
	45			10	26	23	47	41	14	8	3	BAY6000ZZ	
	48						50	44					6
	28			8	19	16	30	23	15	6	4.5	BAF698ZZ	
	40	2.6	7	10	26	23	42	35		8	4	BAY6000ZZ	
	50			12	32	27	52	45	16	10	3	BAY6201ZZ	8
	28			6	19	16	30	22	17	6	5.5	BAF626ZZ	
	38			10	26	23	40	32		8	5	BAY6000ZZ	
	48						50	42					10
	50	3.1	8				52	44	18				
	60			12	32	27	62	54		10	4	BAY6201ZZ	
	75						77	69					10
	100						102	94					
	50			12	32	27	52	42		10	5.5	BAY6201ZZ	
	60	4.1	10				62	52	21				10
	100			15	35	30	102	92		11	5	BAY6202ZZ	
	60						62	50					
	100	5.1	12	15	35	30	102	90	25	11	7	BAY6202ZZ	
	140						142	130					



请按图示订货

型号		R	S
代码	A		
ENW01	20		
ENW11	30	1.6	5

ENW11 — A30 — R1.6



未税价(元)

优惠价	
数量	1~9
价格	100% 另行报价



交货期	
数量	1~9
价格	100% 另行报价