
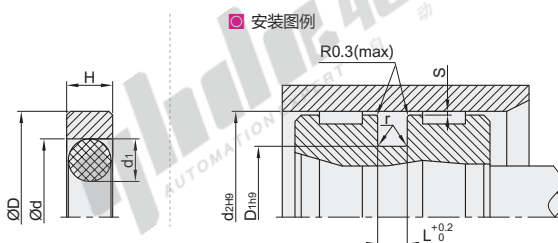


孔用格菜圈

代码	材质		颜色	用途	工况条件			使用温度范围	使用介质
	耐磨环	O型圈			压力	速度	频率		
XTG01	聚四氟乙烯+青铜	丁腈橡胶	棕色	孔用往复运动双向密封	≤60MPa	≤15m/s	≤5Hz	-30~110°C	矿物基液压油、阻燃液、生物可降解液压油、水



视角标准：第一视角

密封圈
C5

型号		产品尺寸				安装尺寸					S径向间隙(max)			
代码	规格	D	d	d1 O型圈	H	d2 轴径	D1 沟槽底径	L 槽宽	r (max)	<10MPa	<20MPa	<40MPa		
XTG01	01	30.3	26.84			30	22.5							
	02	32.3	28.84			32	24.5							
	03	35.3	31.84	2.62	2.95	35	27.5	3.2	0.6				0.15	
	04	36.3	32.84			36	28.5							
	05	38.3	34.84			38	30.5							
	06	40.3	34.78			40	29							
	07	42.3	36.78			42	31							
	08	45.3	39.78			45	34							
	09	48.3	42.78			48	37							
	10	50.3	44.78			50	39							
	11	51.2	45.68			50.8	39.8							
	12	52.4	46.88			52	41			0.4	0.25			
	13	53.4	47.88			53	42							
	14	55.4	49.88			55	44							
	15	57.4	51.88	3.53	3.95	57	46	4.2	1				0.2	
	16	58.4	52.88			58	47							
	17	60.4	54.88			60	49							
	18	62.4	56.88			62	51							
	19	63.4	57.88			63	52							
	20	65.4	59.88			65	54							
	21	68.4	62.88			68	57							
	22	70.4	64.88			70	59							
	23	75.4	69.88			75	64							
	24	80.4	73.22			80	64.5							
	25	82.9	75.72			82.5	67							
	26	85.4	78.22			85	69.5							
	27	90.4	83.22	5.33	6	90	74.5	6.3	1.3	0.5	0.3	0.2		
	28	95.4	88.22			95	79.5							
	29	100.4	93.22			100	84.5							
	30	102	94.82			101.6	86.1							
	31	105.4	98.22			105	89.5							
XTG01	32	108.4	101.22			108	92.5							
	33	110.4	103.22			110	94.5							
	34	115.4	108.22			115	99.5							
	35	120.4	113.22	5.33	6	120	104.5	6.3	1.3	0.5	0.3	0.2		
	36	125.5	118.32			125	109.5							
	37	127.5	120.32			127	111.5							
	38	130.5	123.32			130	114.5							
	39	135.5	125.5			135	114							
	40	140.5	130.5			140	119							
	41	145.5	135.5			145	124							
	42	150.5	140.5			150	129							
	43	155.5	145.5			155	134							
	44	160.5	150.5			160	139							
	45	165.5	155.5			165	144							
	46	170.5	160.5			170	149							
47	175.5	165.5			175	154								
48	180.5	170.5			180	159								
49	190.8	180.8			190	169								
50	200.8	190.8	7	7.8	200	179	8.1	1.8	0.6	0.35	0.25			
51	205.8	195.8			205	184								
52	210.8	200.8			210	189								
53	215.8	205.8			215	194								
54	220.8	210.8			220	199								
55	230.8	220.8			230	209								
56	240.8	230.8			240	219								
57	250.8	240.8			250	229								
58	254.8	244.8			254	233								
59	260.8	250.8			260	239								
60	265.8	255.8			265	244								
61	268.8	258.8			268	247								
62	270.8	260.8			270	249								

请按图示订货

型号	
代码	规格
XTG01	01
XTG01	02

XTG01-02

优惠价

数量	1~7	8~
价格	100%	另行报价

未标价(元)

交货期

7

