

# MXL/XL/L/H型 标准型


# 梯形齿同步带

代码	类型	齿距	材质		颜色	使用温度	
			主体	芯线			
ECE22	MXL	标准型	2.032	氯丁橡胶	玻璃纤维线	黑色	-30~90°C
	XL		5.08				
	L		9.525				
	H		12.7				

皮带宽度公差	
皮带宽度(mm)	公差
3~30	±0.5
31~50	±0.8
51~100	±1.0



- ① 为减少橡胶屑飞溅，橡胶同步带部分齿形齿面布为茶棕色，对强度及使用性能无影响；
- ② 橡胶同步带芯线采用螺旋缠绕的方式排布，分切后会看到芯线层，不影响使用；
- ③ 表格中所有代码的皮带周长为芯线长度。

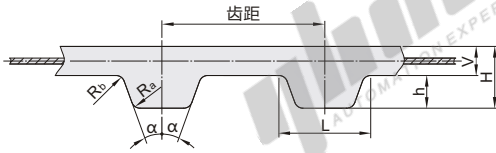

代码	齿形	齿距	2α	L	h	H	V	R <sub>a</sub>	R <sub>b</sub>	重量(g/10mm <sup>2</sup> )	
ECE22	MXL	2.032	40°	1.14	0.51	1.1	±0.2	0.59	0.13	0.13	0.011
	XL	5.08	50°	2.57	1.27	2.25	±0.5	1.0	0.38	0.38	0.022
	L	9.525	40°	4.65	1.91	3.5	±0.7	1.6	0.51	0.51	0.032
	H	12.7	40°	6.12	2.29	4.3		2.0	1.00	1.00	0.040

① 重量为理论值，与实物可能存在差异，仅供参考。



ECE22-MXL (齿距: 2.032)				ECE22-MXL (齿距: 2.032)				ECE22-XL (齿距: 5.08)				ECE22-XL (齿距: 5.08)				ECE22-L (齿距: 9.525)			
型号	皮带公称宽度	齿数	皮带周长	型号	皮带公称宽度	齿数	皮带周长	型号	皮带公称宽度	齿数	皮带周长	型号	皮带公称宽度	齿数	皮带周长	型号	皮带公称宽度	齿数	皮带周长
019 (4.8mm)	45	91.44	162	329.18	025 (6.4mm)	25	127.00	025 (6.4mm)	106	538.48	050 (12.7mm)	26	247.65						
	48	97.54	165	335.28		30	152.40		107	543.56		29	276.23						
	50	101.60	170	345.44		32	162.56		108	548.64		33	314.33						
	52	105.66	175	355.60		34	172.72		110	558.80		36	342.90						
	53	107.70	177	359.66		35	177.80		111	563.88		40	381.00						
	54	109.73	180	365.76		36	182.88		112	568.96		44	419.10						
	55	111.76	184	373.89		37	187.96		114	579.12		45	428.63						
	56	113.79	190	386.08		38	193.04		115	584.20		46	438.15						
	57	115.82	192	390.14		39	198.12		117	594.36		50	476.25						
	59	119.89	195	396.24		40	203.20		120	609.60		54	514.35						
	60	121.92	200	406.40		42	213.36		122	619.76		56	533.40						
	61	123.95	205	416.56		44	223.52		124	629.92		58	552.45						
	63	128.02	210	426.72		45	228.60		125	635.00		60	571.50						
	65	132.08	215	436.88		46	233.68		130	660.40		64	609.60						
	67	136.14	220	447.04		47	238.76		131	665.48		66	628.65						
	68	138.18	221	449.07		48	243.84		133	675.64		68	647.70						
	70	142.24	222	451.10		49	248.92		135	685.80		70	666.75						
	71	144.27	224	455.17		50	254.00		138	701.04		72	685.80						
	72	146.30	226	459.23		51	259.08		140	711.20		74	704.85						
	73	148.34	228	463.30		52	264.16		141	716.28		76	723.90						
	75	152.40	230	467.36		53	269.24		145	736.60		80	762.00						
	76	154.43	232	471.42		54	274.32		150	762.00		81	771.53						
	77	156.46	236	479.55		55	279.40		155	787.40		84	800.10						
	78	158.50	239	485.65		56	284.48		157	797.56		85	809.63						
	79	160.53	240	487.68		57	289.56		160	812.80		86	819.15						
	80	162.56	245	497.84		58	294.64		161	817.88		89	847.73						
	82	166.62	248	503.94	025 (6.4mm)	59	299.72		165	838.20	050 (12.7mm)	90	857.25						
	83	168.66	256	520.19		60	304.80		170	863.60		92	876.30						
	85	172.72	260	528.32		61	309.88		172	873.76		96	914.40						
	87	176.78	262	532.38		62	314.96		174	883.92		98	933.45						
	88	178.82	265	538.48		63	320.04		176	894.08		100	952.50						
	90	182.88	271	550.67	031 (7.9mm)	64	325.12		178	904.24	075 (19.1mm)	102	971.55						
	91	184.91	273	554.74		65	330.20		180	914.40		104	990.60						
	92	186.94	275	558.80		66	335.28		182	924.56		105	1000.13						
	93	188.98	280	568.96		67	340.36		185	939.80		112	1066.80						
	94	191.01	281	570.99		68	345.44		186	944.88		114	1085.85						
	95	193.04	285	579.12		69	350.52		188	955.04		116	1104.90						
	96	195.07	288	585.22		70	355.60		192	975.36		117	1114.43						
	97	197.10	290	589.28		71	360.68		193	980.44		119	1133.48						
	98	199.14	295	599.44		72	365.76		194	985.52		120	1143.00						
	99	201.17	300	609.60		73	370.84		195	990.60		124	1181.10						
	100	203.20	305	619.76		74	375.92		198	1005.84		128	1219.20						
	101	205.23	310	629.92		75	381.00		200	1016.00		136	1295.40						
	102	207.26	312	633.98		76	386.08		204	1036.32		137	1304.93						
	103	209.30	315	640.08		77	391.16		212	1076.96		140	1333.50						
	105	213.36	318	646.18		78	396.24		215	1092.20		144	1371.60						
	106	215.39	320	650.24		79	401.32		225	1143.00		146	1390.65						
	108	219.46	330	670.56		80	406.40		228	1158.24		155	1476.38						
	110	223.52	332	674.62		81	411.48		230	1168.40		160	1524.00						
	112	227.58	334	678.68		82	416.56		235	1193.80		161	1533.53						
	114	231.65	336	682.74		83	421.64		245	1244.60		165	1571.63						
	115	233.68	337	684.78		84	426.72		248	1259.84		168	1600.20						
	118	239.78	347	705.10		85	431.80		255	1295.40		170	1619.25						
	120	243.84	350	711.20		86	436.88		270	1371.60		174	1657.35						
	121	245.87	355	721.36		87	441.96		282	1432.56		176	1676.40						
	122	247.90	359	729.49		88	447.04		296	1503.68		186	1771.65						
	123	249.94	360	731.52		89	452.12		304	1544.32		194	1847.85						
	125	254.00	364	739.65		90	457.20		315	1600.20		195	1857.38						
	126	256.03	365	741.68		91	462.28		319	1620.52		205	1952.63						
	127	258.06	372	755.90		92	467.36		343	1742.44		208	1981.20						
	128	260.10	388	788.42		94	477.52		414	2103.12		210	2000.25						
	129	262.13	397	806.70		95	482.60		430	2184.40		215	2047.88						
	130	264.16	400	812.80		97	492.76		444	2255.52		228	2171.70						
	131	266.19	405	822.96		98	497.84		450	2286.00		230	2190.75						
	132	268.22	410	833.12		99	502.92		454	2306.32		235	2238.38						
	134	272.29	413	839.22		100	508.00		457	2321.56		244	2324.10						
	135	274.32	435	883.92		101	513.08		463	2352.04		245	2333.63						
	138	280.42	440	894.08		103	523.24		507	2575.56		250	2381.25						
	140	284.48	448	910.34		104	528.32		510	2590.80		345	3286.13						
	142	288.54	453	920.50		105	533.40												
	144	292.61	464	942.83															
	145	294.64	467	949.58															
	146	296.67	498	1011.94															
	148	300.74	500	1016.00															
	150	304.80	516	1048.51															
	155	314.96	525	1066.80															
	158	321.06	535	1087.12															
	160	325.12	550	1117.60															

ECE22-H(齿距: 12.7)

型号		齿数	皮带周长
代码	皮带公称宽度		
		37	469.9
		45	571.5
		46	584.2
		48	609.6
		49	622.3
		54	685.8
		56	711.2
		60	762.0
		62	787.4
		63	800.1
		64	812.8
		66	838.2
		68	863.6
		70	889.0
		72	914.4
		74	939.8
		75	952.5
		78	990.6
		80	1016.0
		82	1041.4
		84	1066.8
		86	1092.2
		90	1143.0
		93	1181.1
		96	1219.2
		98	1244.6
075		102	1295.4
(19.1mm)		106	1346.2
		108	1371.6
		112	1422.4
100		113	1435.1
(25.4mm)		114	1447.8
		116	1473.2
		120	1524.0
ECE22-H		121	1536.7
150		126	1600.2
(38.1mm)		128	1625.6
		130	1651.0
		132	1676.4
200		136	1727.2
(50.8mm)		140	1778.0
		146	1854.2
		150	1905.0
		152	1930.4
		154	1955.8
		160	2032.0
		162	2057.4
		164	2082.8
		168	2133.6
		170	2159.0
		172	2184.4
		176	2235.2
		180	2286.0
		190	2413.0
		197	2501.9
		200	2540.0
		204	2590.8
		210	2667.0
		220	2794.0
		226	2870.2
		228	2895.6
		250	3175.0
		265	3365.5
		270	3429.0
		280	3556.0
		336	4267.2
		340	4318.0

ECE22-MXL(齿距: 2.032)



型号		
代码	皮带公称宽度	齿数
ECE22-MXL	019	52
	025	54

ECE22-MXL-025-52



优惠价

数量	1~4	5~
价格	100%	另行报价



4
---

