


# 深沟球轴承

## 单面带防尘盖式

品牌	轴承类型 代码	轴承精度	轴承游隙	后置代码	轴承材质	
					国标	相当
TIMKEN	6	P0	标准游隙(CN/C0)	Z(单面带防尘盖式)	GCr15	SUJ2

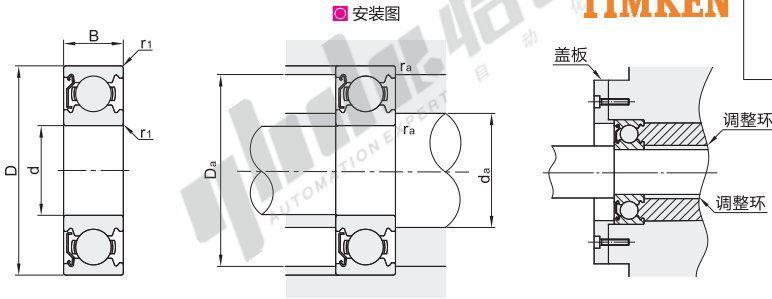

TIMKEN

视角标准：第一视角

型号 代码	主要尺寸(mm)				基本额定载荷(KN)		极限转速(rpm)		安装相关尺寸(mm)				重量 (kg) 参考
	d	D	B	r1 (min)	Cr(动)	Cor(静)	脂润滑	油润滑	da (min)	da (max)	Da (max)	fa (max)	
6000Z-TIMKEN	10	26	8	0.3	4.55	1.97	3000	3600	12	13.5	24.1	0.3	0.02
6200Z-TIMKEN		30	9	0.6			2500	3000	12.7	16	26		0.03
6300Z-TIMKEN	12	35	11		5.1	2.39	2300	2700		17	31	0.6	0.05
6001Z-TIMKEN		28	8	0.3			2800	3200	14	16	26	0.3	0.02
6201Z-TIMKEN	15	32	10		6.8	3.05	2200	2800	14.7	17	28	0.6	0.04
6301Z-TIMKEN		37	12	0.6	9.75	4.25	2000	2400	16.7	18.5	32	1	0.06
6002Z-TIMKEN	17	32	9	0.3	5.6	2.84	2400	2800	17	19	30	0.3	0.03
6202Z-TIMKEN		35	11	0.6	7.65	3.7	2000	2400	17.9	20	31	0.6	0.05
6302Z-TIMKEN	20	42	13		11.4	5.4	1700	2100	19.8	23	37	1	0.08
6003Z-TIMKEN		35	10	0.3	6	3.25	2200	2600	19	21.5	33	0.3	0.04
6203Z-TIMKEN	25	40	12		9.55	4.8	1800	2100	20	23.5	36	0.6	0.07
6303Z-TIMKEN		47	14		13.6	6.55	1600	1900	22	25.5	42	1	0.12
6004Z-TIMKEN	30	42	12		9.4	5	1800	2100	24	26	38	0.6	0.07
6204Z-TIMKEN		47	14		12.8	6.6	1600	1800	24.6	28	42	1	0.11
6304Z-TIMKEN	35	52	15		15.9	7.9	1400	1700	25.8	28.5	45.5	1.1	0.14
6005Z-TIMKEN		47	12	0.6	14		1500	1800	29	30.5	43	0.6	0.08
6205Z-TIMKEN	40	52	15		23.6	12.1	1300	1600	30	32	47	1	0.13
6305Z-TIMKEN		62	17		23.6	12.1	1200	1400	31	36	55.5	1.1	0.23
6006Z-TIMKEN	45	55	13		13.2	8.3	1300	1500	35	37	50	1	0.12
6206Z-TIMKEN		62	16		19.5	11.3	1100	1300	39	39	57	1	0.20
6306Z-TIMKEN	50	72	19		26.7	15	1000	1200	36.5	43	65.5	1.1	0.35
6007Z-TIMKEN		62	14	1.5	16	10.3	1200	1400	40	42	57	1	0.16
6207Z-TIMKEN	55	72	17		25.7	15.3	980	1100	41	45	65.5	1.1	0.29
6307Z-TIMKEN		80	21		33.5	19.2	880	1000	42.9	47	72	1.5	0.46
6008Z-TIMKEN	60	68	15		16.8	11.5	1000	1200	45	47.5	63	1	0.19
6208Z-TIMKEN		80	18	1	29.1	17.9	870	1000	46	51	73.5	1.1	0.37
6308Z-TIMKEN	65	90	23	2	40.5	24.1	780	920	48	54	82	1.5	0.63
6009Z-TIMKEN		75	16	1	20.9	15.2	920	1100	50	53.5	70	1	0.25
6209Z-TIMKEN	70	85	19		53	32	700	820	53	61.5	92	1.5	0.83
6309Z-TIMKEN		100	25	2	21.8	16.6	850	1000	55	58.5	75	1	0.26
6010Z-TIMKEN	75	90	20	1	35	23.2	710	860	56	60	83.5	1.1	0.46
6210Z-TIMKEN		110	27	2	62	38	6400	7500	59	68.5	101	2	1.07
6310Z-TIMKEN	80	90	18	1	28.3	21.3	770	900	61.5	64.2	83.5	1.1	0.38
6011Z-TIMKEN		100	21	2	43.5	29.3	6400	7700	62	67	92	1.5	0.61
6211Z-TIMKEN	85	120	29		71.5	44.5	5800	6800	64	74	111	2	1.37
6311Z-TIMKEN		95	18	1	29.4	23.2	7100	8500	66.5	69.1	88.5	1.1	0.42
6012Z-TIMKEN	90	110	22	2	52.5	36	6000	7100	68	75	102	1.5	0.78
6212Z-TIMKEN		130	31		82	52	5400	6300	71	80.5	119	2.1	1.70
6312Z-TIMKEN	95	100	18	1	30.5	25.2	6700	8000	71.5	74	93.5	1.1	0.44
6013Z-TIMKEN		120	23	2	57	40	5500	6500	73	80.5	112	1.5	0.99
6213Z-TIMKEN	100	140	33		104	68	4600	5400	81	92.5	139	2.1	2.52
6313Z-TIMKEN		110	20	1	38	31	6100	7100	76.5	80.5	103.5	1.1	0.61
6014Z-TIMKEN	105	125	24	2	62	44	5100	6300	78	85	117	1.5	1.07
6214Z-TIMKEN		150	35		104	68	4600	5400	81	92.5	139	2.1	2.52
6314Z-TIMKEN	110	115	20	1	39.5	33.5	5700	6700	81.5	85.6	108.5	1.1	0.65
6015Z-TIMKEN		130	25	2	66	49.5	4800	5600	83	90.5	122	1.5	1.18
6215Z-TIMKEN	115	160	37		113	77	4300	5000	86	99	149	2.1	3.02
6315Z-TIMKEN		125	22	1	47.5	39.5	5300	6300	86.5	91.5	118.5	1.1	0.86
6016Z-TIMKEN	120	140	26	2	72.5	53	4500	5300	89	95.5	131	2	1.40
6216Z-TIMKEN													



型号  
6000Z-TIMKEN  
6200Z-TIMKEN



优惠价  
数量 1~49 50~  
价格 100% 另行报价



交货期  
7

请按图示订货

未税价(元)