



同步带用金属件

螺帽紧固型(组件)

代码	类型	材质	表面处理	附件
ECY11	螺帽紧固型	铝合金	喷细砂本色阳极氧化	内六角螺栓/螺帽

ECY11 (齿条+压板)

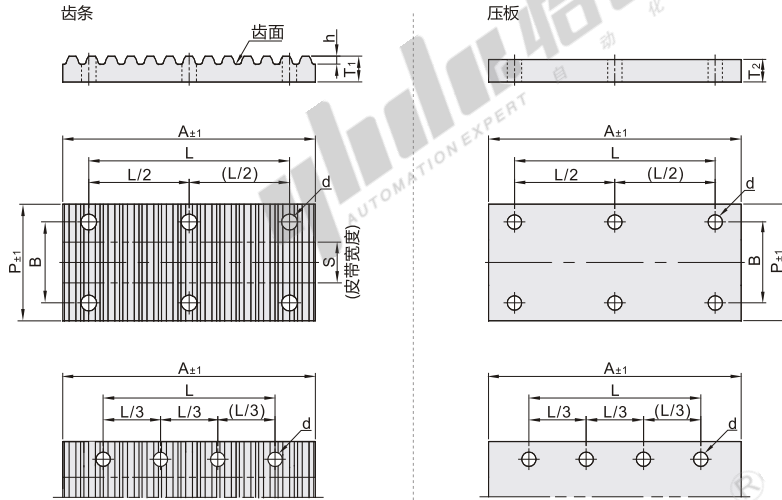

视角标准：第一视角

代码	型号		S	A	B	T ₁	T ₂	h	L	P	附件 螺栓	d	安装 孔数
	皮带种类	皮带公称宽度											
ECY11 (齿条+压板)	MXL	025	6.4	27	11	4	4	0.51	19	19	M3-12	3.3	6
		037	9.5		14					23			
		050	12.7		18					27			
	XL	025	6.4	67	12	6	1.25	56	25	M4-16	4.3	8	
		031	7.9		14				26				
		037	9.5		16				27				
	L	050	12.7	125	20	8	1.90	111	31	M5-20	5.3	8	
		075	19.1		20				33				
		100	25.4		26				39				
	H	150	38.1	166	46	10	2.30	147	59	M5-20	5.3	8	
		075	19.1		26				39				
		100	25.4		33				47				
	S2M	150	38.1	27	45	4	0.76	18	59	M3-12	3.3	6	
		200	50.8		58				71				
		040	4		8				17				
	S3M	060	6	40	10	6	1.14	31	19	M4-16	4.3	8	
		100	10		15				25				
		100	10		10				19				
	S5M	100	10	65	16	5	1.81	51	27	M5-20	5.3	8	
		150	15		21				33				
		250	25		31				43				
	S8M	150	15	105	22	8	2.85	84	35	M4-16	4.3	6	
		250	25		32				45				
		300	30		37				51				
	T5	400	40	65	47	6	1.2	51	61	M5-20	5.3	8	
		100	10		16				27				
		150	15		21				33				
	T10	200	20	131	26	8	2.5	111	39	M4-16	4.3	6	
		250	25		31				44				
		150	15		22				35				
	200	20		27				41					
	250	25		32				45					
	300	30		37				51					



请按图示订货

型号		S	
代码	皮带公称宽度		
ECY11	MXL	025	6.4
		037	9.5
		050	12.7

ECY11-MXL-025



未税价(元)

● 优惠价
数量 1~4 5~
价格 100% 另行报价



交货期

1