


# 欧标40槽宽8.2系列型材(实用型)


◀ 边长40/80mm

| 代码    | 材质       | 表面处理 |
|-------|----------|------|
| AOB05 | A6063-T5 | 喷砂氧化 |


- ① 切断面未进行氧化处理。
- ② 最大使用长度：5880~6000mm。
- ③ 可定制表面处理。




☐ L长度公差




☐ 槽口详图

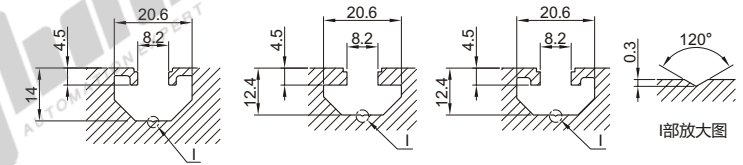


AOB05-J4040E




AOB05-J4040C




AOB05-J4040GE




AOB05-J4040J




AOB05-J4040A




AOB05-J4040B




AOB05-J4040T




AOB05-J4040H




AOB05-J4040R




AOB05-J4080E




AOB05-J4080C




AOB05-J4080GE




AOB05-J4080J



AOB05-J4080A



AOB05-J4080B




槽宽8.2系列  
欧标40


边长80mm ▶

# 欧标40槽宽8.2系列型材(实用型)


AOB05-J8840R

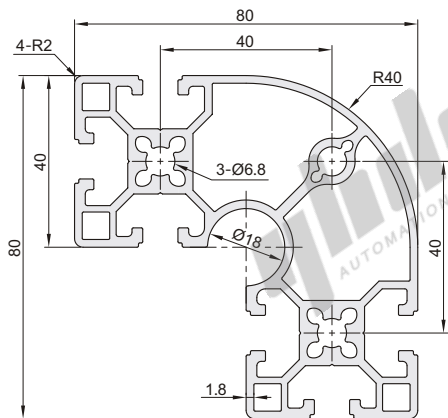


AOB05-J8840RA

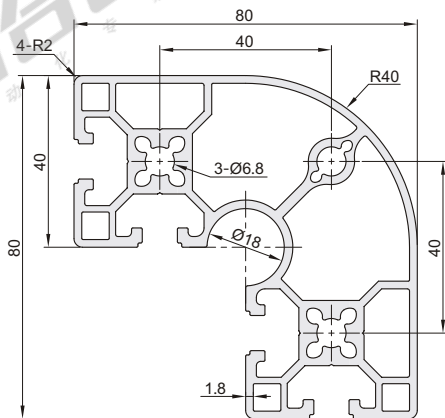

AOB05-J8080

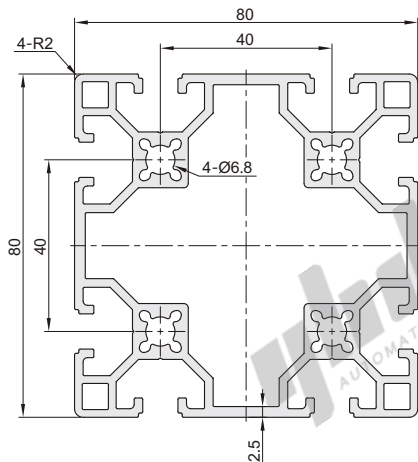

AOB05-J8080J

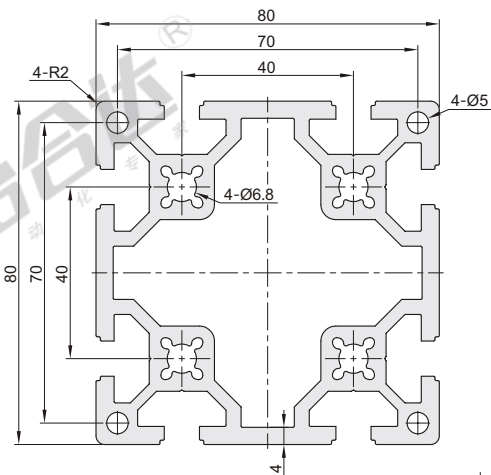

视角标准：第一视角

| 型号<br>代码 | 规格      | L<br>最小单位0.5 | 截面尺寸                  | 每米重量Kg/m<br>(理论值)     | 截面积<br>(mm <sup>2</sup> ) | 截面惯性矩                 |                       | 抗弯截面模数                        |                               |
|----------|---------|--------------|-----------------------|-----------------------|---------------------------|-----------------------|-----------------------|-------------------------------|-------------------------------|
|          |         |              |                       |                       |                           | $I_x$                 | $I_y$                 | $W_{xmax}$ (mm <sup>3</sup> ) | $W_{ymax}$ (mm <sup>3</sup> ) |
| AOB05    | J4040R  | 50~6000      | 40×40                 | 1.25                  | 451.95                    | $5.751 \times 10^4$   | $5.751 \times 10^4$   | 3301.38                       | 3301.38                       |
|          | J4040C  |              |                       | 1.18                  | 426.50                    | $6.861 \times 10^4$   | $6.861 \times 10^4$   | 3430.50                       | 3430.50                       |
|          | J4040GE |              |                       | 1.36                  | 493.92                    | $7.82 \times 10^4$    | $7.82 \times 10^4$    | 3912.90                       | 3912.90                       |
|          | J4040E  |              |                       | 1.50                  | 544.45                    | $8.534 \times 10^4$   | $8.534 \times 10^4$   | 4267.00                       | 4267.00                       |
|          | J4040J  |              |                       | 1.94                  | 704.55                    | $11.758 \times 10^4$  | $11.758 \times 10^4$  | 5879.00                       | 5879.00                       |
|          | J4040A  |              |                       | 1.44                  | 523.75                    | $8.010 \times 10^4$   | $8.284 \times 10^4$   | 3890.26                       | 4142.00                       |
|          | J4040B  |              |                       | 1.42                  | 515.74                    | $8.021 \times 10^4$   | $8.042 \times 10^4$   | 3983.59                       | 3961.23                       |
|          | J4040H  |              |                       | 1.39                  | 505.32                    | $7.578 \times 10^4$   | $8.126 \times 10^4$   | 3789.00                       | 4063.00                       |
|          | J4040T  |              |                       | 1.42                  | 513.91                    | $7.891 \times 10^4$   | $8.165 \times 10^4$   | 3945.50                       | 4082.50                       |
|          | J4080E  |              |                       | 2.70                  | 981.29                    | $16.834 \times 10^4$  | $63.014 \times 10^4$  | 8416.84                       | 15753.39                      |
|          | J4080C  |              |                       | 2.04                  | 742.91                    | $12.973 \times 10^4$  | $47.865 \times 10^4$  | 6486.60                       | 11966.32                      |
|          | J4080GE |              |                       | 2.30                  | 837.11                    | $14.05 \times 10^4$   | $52.87 \times 10^4$   | 7023.56                       | 13217.70                      |
|          | J4080J  |              |                       | 3.67                  | 1333.57                   | $23.165 \times 10^4$  | $81.866 \times 10^4$  | 11582.53                      | 20466.62                      |
|          | J4080A  |              |                       | 2.03                  | 738.80                    | $13.043 \times 10^4$  | $47.60 \times 10^4$   | 6513.04                       | 11899.79                      |
|          | J4080B  |              |                       | 2.03                  | 736.74                    | $12.992 \times 10^4$  | $47.599 \times 10^4$  | 6487.66                       | 11857.84                      |
|          | J8840R  |              |                       | 3.23                  | 1174.21                   | $68.46 \times 10^4$   | $68.46 \times 10^4$   | 16014.04                      | 16014.04                      |
|          | J8840RA |              |                       | 3.22                  | 1169.74                   | $68.254 \times 10^4$  | $68.254 \times 10^4$  | 15962.11                      | 15962.11                      |
|          | J8080   |              |                       | 3.81                  | 1383.29                   | $102.196 \times 10^4$ | $102.196 \times 10^4$ | 25549.00                      | 25549.00                      |
| J8080J   | 5.53    | 2010.02      | $145.328 \times 10^4$ | $145.328 \times 10^4$ | 36332.00                  | 36332.00              |                       |                               |                               |



请按图示订货

| 型号    |                  | L       |
|-------|------------------|---------|
| 代码    | 规格               | 最小单位0.5 |
| AOB05 | J4040R<br>J4040C | 50~6000 |

AOB05 - J4040R - L50

槽宽8.2系列  
欧标40