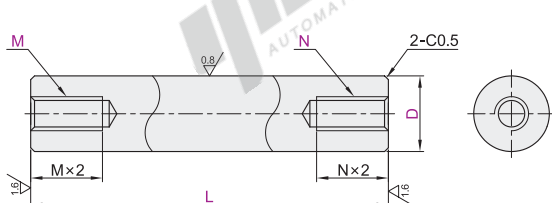


◀ 两端内螺纹型・标准型



来图定制



D	g6	h7	h9
4~6	-0.004 -0.012	0 -0.012	0 -0.030
8~10	-0.005 -0.014	0 -0.015	0 -0.036
12~18	-0.006 -0.017	0 -0.018	0 -0.043
20~30	-0.007 -0.020	0 -0.021	0 -0.052
35~50	-0.009 -0.025	0 -0.025	0 -0.062

视角标准：第一视角

请按图示订货

型号		L	M·N		
代码	D				
MAI01	12	25.0~600.0	5	6	8
MAI02	13		5	6	8

MAI02—D12—L30—M6—N6

型号		L	M·N		可选加工代码
代码	D				
MAI01	12	25.0~600.0	5	6 8	LC LA()...
MAI02	13		5	6 8	

MAI02—D12—L30—M6—N6—LC

数量	1~19	20~
价格	100%	另行报价



未税价(元)



❗ 无表面处理



有表面处理

型号		最小单位0.1	M·N										
代码	Dh9	L											
MAI61	4	12.0~200.0	2										
	5	12.0~250.0	2, 6	3									
	6	18.0~300.0	3	4									
	8	18.0~400.0	3	4	5	6							
	10	18.0~500.0	4	5	6								
	12	25.0~600.0	5	6	8								
	15	25.0~700.0	5	6	8	10							
	20	35.0~800.0	5	6	8	10	12	16					
	25	45.0~800.0	5	6	8	10	12	16					
	30	55.0~800.0	8	10	12	16	20						
35	65.0~800.0	8	10	12	16	20	24						
40	75.0~800.0	12	16	20	24	30							
50	95.0~800.0	16	20	24	30								





可选加工

可选加工

代碼

技术说明

变更L尺寸公差	增加平面	增加键槽	增加开口凸轮用槽																							
	增加1处平面LA()  增加2处平面LB() 	增加1处键槽KB()  增加2处键槽KC() 																								
LC	LA()-LB()	KB()-KC()	KD()																							
选型方法 LC ① L<400变更为L±0.05 L≥400变更为L±0.1	选型方法 LA10-G3 选型方法 LB10-J3-Y10-X3 ① 最小单位1 ② 指定G-J-X时，须为50以下 <table><tr><th>D</th><th>H</th></tr><tr><td>6~17</td><td>1</td></tr><tr><td>18~40</td><td>2</td></tr><tr><td>50</td><td>3</td></tr></table>	D	H	6~17	1	18~40	2	50	3	选型方法 KB50-S10 选型方法 KC50-C8-K40-T10 ① 最小单位1 ② KB+KC-K=0, KB+S≥L, KC+C+T+K≥L, 键槽如右图形状  ③ 指定S-T-C时，须为100以下 ④ 需要3处键槽时，请同时选择KB与KC ⑤ 键槽详情见转轴产品简介。	选型方法 KD10 ① 最小单位1 ② 适用于下表D规格 <table><tr><th>D</th><th>d</th><th>V2</th></tr><tr><td>6</td><td>5</td><td>4</td></tr><tr><td>8</td><td>7</td><td></td></tr><tr><td>10</td><td>8</td><td></td></tr><tr><td>12</td><td>10</td><td>5</td></tr></table>	D	d	V2	6	5	4	8	7		10	8		12	10	5
D	H																									
6~17	1																									
18~40	2																									
50	3																									
D	d	V2																								
6	5	4																								
8	7																									
10	8																									
12	10	5																								