




代码	类型		材质		附件
			主体	间隔环	
DBN66	单侧螺钉夹紧型	短型	铝合金	HNBR	内六角圆柱头螺钉

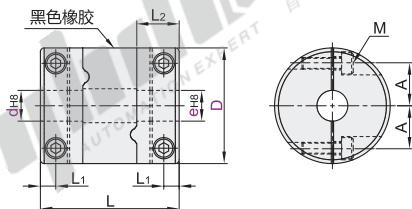

型号		d-e												
代码	D													
DBN66	15	d	3	4	4.5	5	6							
		e	5 6	4 5 6	5	5 6	6							
	19	d	4	5	6	6.35	8							
		e	5	5 6 7 8	6 6.35 7 8	8	8							
	25	d	5	6	6.35	8	10	12						
		e	6 8	6 8 10 11 12	8 10	8 10 11 12	10 12	12						
	27	d	5	6	8	10	12	14						
	e	6 8 14	6 8 10 11 12 14	8 10 11 12 14	10 12 14	12 14	14							
30	d	8	10	11	12	14	15							
	e	8 10 11 12 14 15	10 11 12 14 15	12	12 14 15	14 15	15							
34	d	8	10	11	12	14	15							
	e	8 10 11 12 14 15	10 11 12 14 15	11 12	12 14 15	14 15	15							
39	d	10	12	14	15	16	17	20						
	e	10 12 14 15 16	12 14 15 16 19 20	14 15 16 15	16 19	16	17	20						

型号		L	L ₁	L ₂	A	M	锁紧扭矩 (N·m)	额定扭矩 (N·m)	最大扭矩 (N·m)	最高转速 (r/min)	惯性力矩 (kg·m ²)	静态扭转刚性 (N·m/rad)	容许安装偏差			重量 (g)
代码	D												径向 (mm)	角向 (°)	轴向 (mm)	
DBN66	15	18	2.15	6.5	5	M1.6	0.25	0.5	1	42000	2.0×10 ⁻⁷	25	0.15	1.5	±0.2	7
	19	20	2.65	7.7	6.5	M2	0.5	0.8	1.6	33000	5.7×10 ⁻⁷	63				11
	25	27	3.25	9.5	9	M2.5	1	2.3	4.6	25000	2.2×10 ⁻⁶	100				24
	27	27	4	11	11	M3	1.5	3.3	6.6	21000	5.3×10 ⁻⁶	160	0.2	±0.3	58	27
	30	30														12
	34	35	4.5	15.5	14.5	M4	2.5	7	14	16000	2.0×10 ⁻⁵	440	86			

① 惯性力矩和重量按最大孔计算!



型号		d-e										
代码	D											
DBN66	25	d	8									
		e	8 10 11 12									

DBN66—D25—d8—e10



● 优惠价

数量	1~9	10~
价格	100%	另行报价

未税价(元)

