


直接头/弯接头
T型三通接头/隔板直接头
外螺纹

经济型 全不锈钢快插接头

直接头


代码	类型	材质	
		主体	密封
XZA01	外螺纹 直接头	SUS316	氟化橡胶
XZA11		SUS304	



视角标准：第一视角

弯接头

代码	类型	材质	
		主体	密封
XZA02	外螺纹 弯接头	SUS316	氟化橡胶
XZA12		SUS304	




视角标准：第一视角

型号		公称型号	R	A	B	S
代码	D					
(SUS316) XZA01	4	M5	M5	20.5	4	10
		M6	M6			
		1	R1/8	20	7.5	
		2	R1/4	20.2	9.5	14
	6	M5	M5	21.2	4	12
		M6	M6			
		1	R1/8	20.1	7.5	
		2	R1/4	20.2	9.5	14
		3	R3/8	21.2	10.5	17
		4	R1/2	23.2	12.5	21
	8	1	R1/8	25	7.5	14
		2	R1/4	23.5	9.5	
(SUS304) XZA11	8	3	R3/8	22	10.5	17
		4	R1/2	24	12.5	21
	10	1	R1/8	27	7.5	
		2	R1/4	29	9.5	17
		3	R3/8	26	10.5	
		4	R1/2	24.7	12.5	
	12	2	R1/4	31.5	9.5	21
		3	R3/8	28.4	10.5	
		4	R1/2	30.7	12.5	

型号		公称型号	R	A	B	F	C	E	S
代码	D								
(SUS316) XZA02	4	M5	M5	4	20.1	25.2	18.4	21.9	12
		M6	M6						
		1	R1/8	7.5	18.1	23.2		21.8	14
		2	R1/4	9.5	19.8	24.9			
	6	M5	M5	4	21.1	27.4		23.2	12
		M6	M6						
		1	R1/8	7.5	19.1	25.1	19		14
		2	R1/4	9.5	20.8	26.8			
		3	R3/8	10.5	21.8	28		23.1	17
		4	R1/2	15	30.5	36.5	18.7	23.4	22
	8	1	R1/8	7.5	20.1	27.2		25.7	12
		2	R1/4	9.5	21.8	29.1		25.9	14
(SUS304) XZA12	8	3	R3/8	10.5	22.8	30.1	20.4	25.5	17
		4	R1/2	12.5	25.7	32.6		25.7	21
	10	1	R1/8	7.5	21.9	30.2		29.6	12
		2	R1/4	9.5	23.5	32.3		29.9	14
		3	R3/8	10.5	24.4	33.6	24.1	30.2	17
		4	R1/2	12.5	27.2	35.4		30	21
	12	2	R1/4	9.5	24.9	34.8		35	14
		3	R3/8	10.5	25.9	36.5	27.8	34.6	17
		4	R1/2	12.5	28.8	38.8		34.3	21

T型三通接头


代码	类型	材质	
		主体	密封
XZA06	外螺纹 T型三通接头	SUS316	氟化橡胶

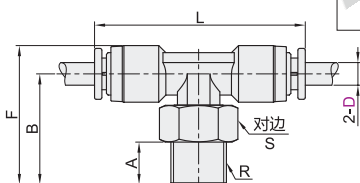

视角标准：第一视角

隔板直接头

代码	类型	材质	
		主体	密封
XZA07	外螺纹 隔板直接头	SUS316	氟化橡胶
XZA27		SUS304	



视角标准：第一视角

型号		公称型号	R	A	B	F	L	S
代码	D							
XZA06	4	M5	M5	4	22	27.6	46	12
		M6	M6					
		1	R1/8	7.5	25.5	26.9		
		2	R1/4	9.5	27.5	28.9		14
	6	M5	M5	4	22	28.6		12
		M6	M6					
		1	R1/8	7.5	25	27.7	46.8	
		2	R1/4	9.5	27	29.5		14
		3	R3/8	10.5	28	31.4		17
	8	1	R1/8	7.5	25	29.1		12
		2	R1/4	9.5	27	31.15	52.3	14
		3	R3/8	10.5	28	32.8		17
		4	R1/2	12.5	30	35.25		21
	10	1	R1/8	7.5	26	33.3		12
		2	R1/4	9.5	28	35	59.5	14
		3	R3/8	10.5	29	35.8		17
		4	R1/2	12.5	31	38.8		21
	12	2	R1/4	9.5	30.5	37.65		14
		3	R3/8	10.5	31.5	38.65	66.14	17
		4	R1/2	12.5	33.5	40.65		21

型号		A	M	S	Lmax
代码	D				
(SUS316) XZA07	4	30	M12×1.0	14	9.5
(SUS304) XZA27	6	31	M14×1.0	17	
	8	34.4	M16×1.0	19	12
	10	38.2	M19×1.0	21	14
	12	42.5	M22×1.0	26	17

隔板直接头

型号		A
代码	D	
XZA07	4	30
XZA27	6	31

请按图示订货



● 优惠价
数量 1~29 30~
价格 100% 另行报价



交货期
5

气调
动速
接阀
头类