

超短头型
超薄头型

内六角圆柱头螺钉

超短头型


代码	类型		螺纹	材质		硬度	表面处理	强度等级
				国标	相当			
TAF51	超短头型	全牙	粗牙	35CrMo	SCM435	32~39HRC	发黑	10.9
TAF53				0Cr18Ni9	SUS304	—	电镀	
TAF52				—	—	—	—	

特点：可以直接使用在以往会被六角螺栓头阻碍到的地方。

TAF51



TAF52

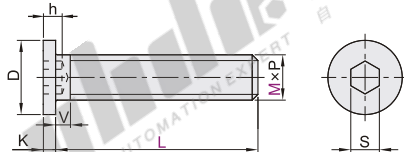

视角标准：第一视角


型号		L																P	D	K	S	h (max)	V (max)			
代码	M																	螺距								
(SCM435) TAF51 TAF53	2	3	4	5	6	8	10	12	14	16	18						0.4	4	1.1	1.3	1.2	1.2				
	2.5	3	4	5	6	8	10	12	14	16	18	20					0.45	5	1.3	1.5	2	1.5				
	3	3	4	5	6	8	10	12	14	16	18	20					0.5	6								
	4	4	5	6	8	10	12	14	16	18	20	25	30					0.7	8	2	2.5	1.6				
	5	5	6	8	10	12	14	16	18	20	25	30					0.8	9	1.5	3	3					
	6	6											8	10	12	14	16	18		20	25	30	1.0	10	4	2
	8	6				8	10	12	14	16	18	20	25	30	35	40	45	50		55	60	1.25	13	4	5	2.5
	10	8				10	12	14	16	18	20	25	30	35	40	45	50	55	60	1.5	16	5	5	3		

TAF53不适用带*规格。

型号																		P	D	K	S	h	V									
代码	M	L																螺距		(max)		(max)	(max)									
(SUS304) TAF52	2	3	4	5	6	8	10	12	14	16	18						0.4	4	1.5	1.3	1.2	1.2										
	2.5	3	4	5	6	8	10	12	14	16	18	20					0.45	5		1.5	1.5											
	3	3	4	5	6	8	10	12	14	16	18	20					0.5	6		1.5	2											
	4	4	5	6	8	10	12	14	16	18	20	25	30					0.7		8	2.5	1.6										
	5	5	6	8	10	12	14	16	18	20	25	30					0.8	9	3	3												
	6	6										8	10	12	14	16	18	20		25	30	1.0	10	4	2							
	8											8	10	12	14	16	18	20		25	30	35	40	45	50	55	60	1.25	13	4	5	2.5
	10											8	10	12	14	16	18	20		25	30	35	40	45	50	55	60	1.5	15	5		3

超薄头型

代码	类型	螺纹	材质		表面处理	强度等级
			国标	相当		
TAR11	超薄头型	粗牙	0Cr18Ni9	SUS304	—	A2-70

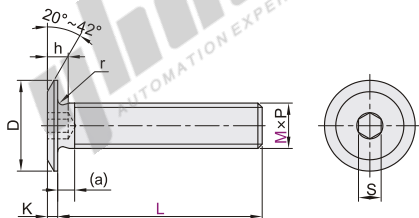

视角标准：第一视角

型号		L										P	D	K	S	h	(a)	r		
代码	M											螺距							(min)	
TAR11	2	3	4	5	6	8	10	12			0.4	4	0.5	1.27	1.2					
	2.5	3	4	5	6						0.45	5	0.6	1.27	1.5		1.2	0.1		
	3	4	5	6	8	10	12	16			0.5	6	0.8	1.5	2	1.4				
	4				5	6	8	10	12	14	16	20	25	0.7	8	0.9	2	2.5	1.5	0.2
	5				6	8	10	12	14	16	20	25	0.8	9	1	2.5	3	1.8		
	6				8	10	12	14	16	20	25	1.0	10	1.2	3	4	2.2	0.25		

超薄头型

型号		L					
代码	M						
TAR11	4	5	6	8	10	12	14
	5	6	8	10	12	14	

TAR11—M5—L8



请按图示订货



未税价(元)


数量	1~9	10~
价格	100%	另行报价



交货期
5



Example
使用示例

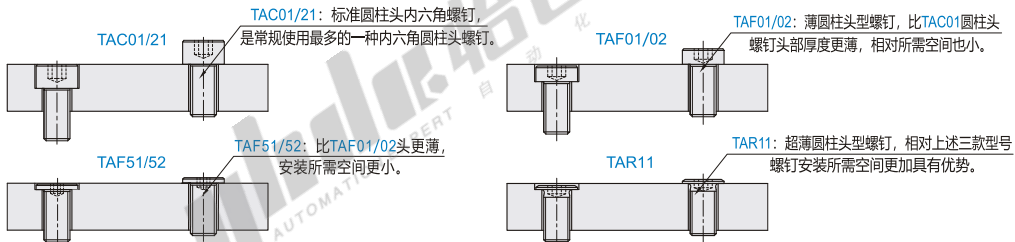

- TAF01/02薄圆柱头螺钉，比TAC01圆柱头螺钉头部厚度更薄，相对所需空间也小。
- TAF51/52超短头圆柱头螺钉，比TAF01/02薄圆柱头螺钉头部更薄，安装所需空间更小。
- TAR11超薄头圆柱头螺钉，相对上述四款型号螺钉安装所需空间更加具有优势。