


带挡圈槽型/带键槽型

直杆型


导向轴

带挡圈槽型

代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
SAE01	带挡圈槽型	g6	GCr15	SUJ2	高频淬火	—
SAE02					有效硬化层深度见P16	镀硬铬，镀层硬度HV750~，镀层厚度3μm~
SAE06			9Cr18Mo	SUS440C	淬火硬度	—
SAE07			或同等硬度耐蚀钢	或同等硬度耐蚀钢	GCr15	—
SAE22			45	S45C	9Cr18Mo或同等硬度耐蚀钢	镀硬铬，镀层硬度HV750~，镀层厚度3μm~

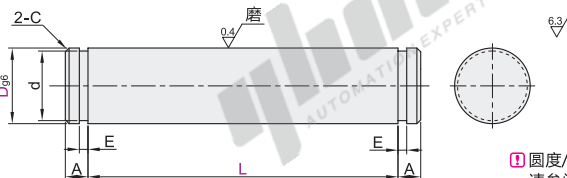

① 圆度/直线度/垂直度/同轴度/硬度变化/铬层分布，请参阅导向轴产品简介。



型号		L	A	E	d	附带挡圈(2个)		C
代码	D _{g6}					SAE01/06	SAE02/07/22	
SAE01	3	8~400	2	0.5	2	TBP11-2	TBP12-2	0.5以下
	4	15~600	2	0.7	3	TBP11-3	TBP12-3	
	5	15~600	2	0.7	4	TBP11-4	TBP12-4	
	6	15~600	2	0.7	5	TBP11-5	TBP12-5	
	8	15~600	2	0.7	7	TBP11-7	TBP12-7	
SAE02	10	15~800	3	0.9	9.6	TBP01-10	TBP02-10	0.5以下
	12	15~1000	3	1.15	11.5	TBP01-12	TBP02-12	
SAE06	13	20~1000	3.5	1.15	12.4	TBP01-13	TBP02-13	1.0以下
	15	20~1200	3.5	1.15	14.3	TBP01-15	TBP02-15	
SAE22	16	25~1200	4.5	1.35	15.2	TBP01-16	TBP02-16	1.0以下
	18	25~1200	4.5	1.35	17	TBP01-18	TBP02-18	
	20	30~1200	4.5	1.35	19	TBP01-20	TBP02-20	
	25	30~1200	4.5	1.65	23.9	TBP01-25	TBP02-25	
	30	30~1200	4.5	1.65	28.6	TBP01-30	TBP02-30	



代码	技术说明
HC	一端挡圈槽取消 选型方法 HC

① 可选加工可能会使产品硬度降低。



型号	D	L	A
SAE01	3	8~400	2
SAE02	4	15~600	2

请按图示订货

SAE01—D3—L12

可选加工

型号	D	L	可选加工代码
SAE01	3	8~400	HC
SAE02	4	15~600	HC

SAE01—D3—L12—HC




数量	1~9	10~
价格	95%	另行报价

交货期	3
-----	---

带键槽型

代码	类型	D公差	材质		硬度	表面处理
			国标	相当		
SAF01	带键槽型	g6	GCr15	SUJ2	高频淬火	—
SAF02					有效硬化层深度见P16	镀硬铬，镀层硬度HV750~，镀层厚度3μm~
SAF06			9Cr18Mo	SUS440C	淬火硬度	—
SAF07			或同等硬度耐蚀钢	或同等硬度耐蚀钢	GCr15	—

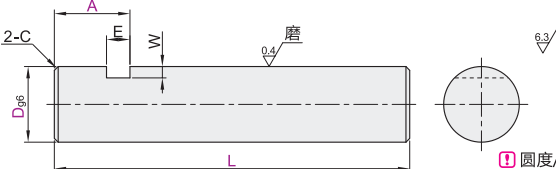

① 圆度/直线度/垂直度/同轴度/硬度变化/铬层分布，请参阅导向轴产品简介。



型号		L	A	E	W	C
代码	D _{g6}					
SAF01	6	15~600	A=6~L/2	3.1	3	0.5以下
	8	15~800				
	10	15~800				
	12	15~1000				
	13	20~1000				
SAF02	15	20~1000				
	16	25~1200				
SAF06	18	25~1200				
	20	30~1200				
SAF07	25	30~1200				
	30	30~1500				
	35	40~1500				
	40	50~1500				
	50	50~1500				



代码	LC	SC()
SAF01	变更LR尺寸公差 选型方法 LC	增加1处扳手槽 选型方法 SC10
	① 最小单位0.1 ② L<300变更为L±0.03; 300≤L<600变更为L±0.05; L≥600变更为L±0.1	① 最小单位1
SAF02	LC	SC10
SAF06	LC	SC10
SAF07	LC	SC10

① 选择2个或以上可选加工时，各加工部位间隔2mm以上。

② 可选加工可能会使产品硬度降低。



型号	D	L	A
SAF01	6	15~600	A=6~L/2
SAF02	8	15~800	A=6~L/2

请按图示订货

SAF01—D6—L80—A10

可选加工

型号	D	L	A	可选加工代码
SAF01	6	15~600	A=6~L/2	LC SC()
SAF02	8	15~800	A=6~L/2	LC SC()

SAF01—D6—L80—A10—SC10



数量	1~9	10~
价格	95%	另行报价

交货期	3
-----	---