

# 定位销用衬套


## 防脱落型·无肩型/带肩型

### □ 无肩型

代码	类型	公差等级	材质		硬度	表面处理
			国标	相当		
YEL01	无肩型	Dm6	T10(A)	SKS93	54~58HRC	—
YEL02						发黑
YEL03						无电解镀镍
YEL06	无肩型	Dp6	0Cr18Ni9	SUS304	—	—
YEL11			9Cr18Mo	SUS440C	48~53HRC	—
YEL21			—	—	—	—
YEL22	带肩型	Dp6	T10(A)	SKS93	54~58HRC	发黑
YEL23						无电解镀镍
YEL26						—
YEL31						—
YEL31	带肩型	Dh6	9Cr18Mo	SUS440C	48~53HRC	—



型号	D公差			最小单位0.01		R	
	代码	D	m6	p6	P		L
Dm6	8	+0.015	+0.024	0	4.00~4.50	8.0~12.0	1.0
YEL01	10	+0.006	+0.015	-0.009	4.00~6.50	8.0~17.0	
YEL02	12	+0.018	+0.029	0	6.00~8.50	10.0~22.0	
YEL03	15	+0.007	+0.018	-0.011	8.00~10.50	—	2.0
YEL06	18	+0.018	+0.029	0	10.00~12.50	—	
YEL11	20	+0.021	+0.035	0	12.00~13.50	10.0~37.0	
Dp6	22	+0.021	+0.035	0	12.00~13.50	—	2.0
YEL21	25	+0.008	+0.022	-0.013	13.00~15.50	—	
YEL22	26	+0.025	+0.042	0	15.00~16.50	—	
YEL23	26	+0.025	+0.042	0	16.00~20.50	—	3.0
YEL26	30	+0.009	+0.026	-0.016	20.00~25.00	12.0~62.0	
YEL31	35	+0.025	+0.042	0	20.00~25.00	—	

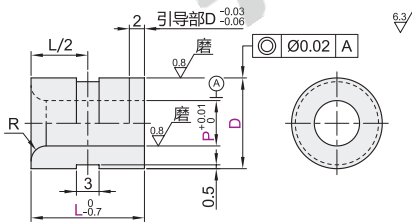


代码	技术说明
HA	变更防脱落部深度 
HA	选型方法 HA 变更防脱落部深度为1.0 □ D<18不适用

视角标准：第一视角

### □ 带肩型

代码	类型	公差等级	材质		硬度	表面处理
			国标	相当		
YEL41	带肩型	Dm6	T10(A)	SKS93	54~58HRC	—
YEL42						无电解镀镍
YEL51						9Cr18Mo
YEL61	带肩型	Dp6	T10(A)	SKS93	54~58HRC	无电解镀镍
YEL62						—
YEL71						9Cr18Mo
YEL81	带肩型	Dh6	T10(A)	SKS93	54~58HRC	—
YEL82						无电解镀镍

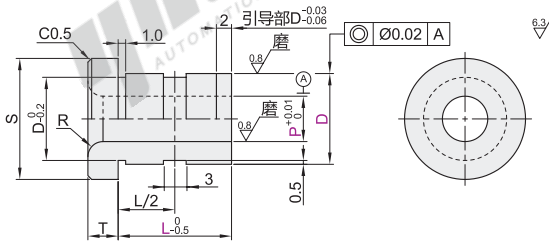

□ 引导部不适用Dh6产品。

视角标准：第一视角

型号	D公差			最小单位0.01		最小单位0.1		R	S	T
	代码	D	m6	p6	h6	P	L			
Dm6	8	+0.015	+0.024	0	—	4.00~4.50	8.0~12.0	1.0	12	3
YEL41	10	+0.006	+0.015	-0.009	—	4.00~6.50	8.0~17.0		14	—
YEL42	12	+0.018	+0.029	0	—	6.00~8.50	—		16	—
YEL51	15	+0.007	+0.018	-0.011	—	8.00~10.50	—	2.0	19	4
YEL61	18	+0.018	+0.029	0	—	10.00~12.50	—		22	—
YEL62	20	+0.021	+0.035	0	—	12.00~13.50	10.0~37.0		26	—
YEL71	25	+0.008	+0.022	-0.013	—	13.00~15.50	—	3.0	—	5
YEL81	26	+0.025	+0.042	0	—	15.00~16.50	—		30	—
YEL82	30	+0.009	+0.026	-0.016	—	16.00~20.50	12.0~52.0		35	—
YEL82	35	+0.025	+0.042	0	—	20.00~25.00	—	40	—	



代码	技术说明
HA	变更防脱落部深度 
HA	选型方法 HA 变更防脱落部深度为1.0 □ D<18不适用

定位销  
夹具用衬套  
A6



### □ 无肩型

型号	D公差			最小单位0.01		最小单位0.1	
代码	D	m6	p6	P	L	R	S
YEL01	8	+0.015	+0.024	4.00~6.50	8.0~12.0	1.0	12
YEL02	12	+0.018	+0.029	6.00~8.50	10.0~22.0	—	—

YEL01—D10—P4—L12

### □ 带肩型

型号	D公差				最小单位0.01		最小单位0.1	
代码	D	m6	p6	h6	P	L	R	S
YEL41	10	+0.015	+0.024	0	4.00~6.50	8.0~17.0	1.0	14
YEL42	12	+0.018	+0.029	0	6.00~8.50	—	—	—

YEL41—D10—P5—L15

### □ 可选加工

代码	型号	D	m6	p6	h6	P	L	可选加工代码
YEL41	10	+0.015	+0.024	0	—	4.00~6.50	—	HA
YEL42	12	+0.018	+0.029	0	—	6.00~8.50	8.0~17.0	HA

YEL41—D10—P5—L15—HA



数量	1~4	5~
价格	100%	另行报价

未税价(元)

请按图示订货



□ 无表面处理

□ 有表面处理

□ 无表面处理/无硬度