

真空用深沟球轴承


◀ 双面带防尘盖式

材质: SUJ2

| 代码 | 类型 | 轴承类型 代码 | 轴承精度 | 后置代码 | 轴承材质 | | 推荐使用 温度范围 |
|-------|-----|------------|---------------|------------|-------|------|--------------|
| | | | | | 国标 | 相当 | |
| BAY06 | 标准型 | 6 | GB/T 307.1 0级 | ZZ(双面带防尘盖) | GCr15 | SUJ2 | -30~200°C |



安装图

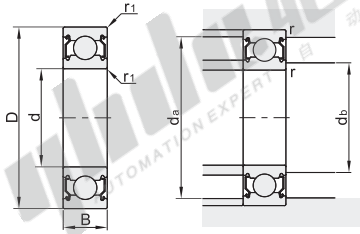

❏ 不承诺品牌。

视角标准: 第一视角

| 代码 | 型号 轴承型号 | d | D | B | r1 (min) | 基本额定负载(KN) | | 容许转速 rpm (参考) | 安装尺寸 | | | 重量 (g) (参考) | |
|--------|------------|-----|-----|-----|-------------|------------|--------|---------------------|-------|-------|-------------|-------------------|------------|
| | | | | | | Cr(动) | Cor(静) | | db | | da (max) | | r (max) |
| | | | | | | | | | (min) | (max) | | | |
| BAY06 | 6000ZZ | | 26 | 8 | 0.3 | 4.55 | 1.96 | 30000 | 12 | 13.5 | 24 | 0.3 | 19 |
| | 6200ZZ | 10 | 30 | 9 | 0.6 | 5.1 | 2.39 | 24000 | 14 | 16 | 26 | 0.6 | 32 |
| | 6300ZZ | | 35 | 11 | | 8.1 | 3.45 | 21000 | | 16.5 | 31 | | 52 |
| | 6001ZZ | | 28 | 8 | 0.3 | 5.1 | 2.39 | 27000 | 16 | 26 | 0.3 | 21 | |
| | 6201ZZ | 12 | 32 | 10 | 0.6 | 6.1 | 2.75 | 22000 | 16 | 17 | 28 | 0.6 | 37 |
| | 6301ZZ | | 37 | 12 | 1 | 9.7 | 4.2 | 19000 | 17 | 18 | 32 | 1 | 60 |
| | 6002ZZ | | 32 | 9 | 0.3 | 5.6 | 2.83 | 23000 | | 19 | 30 | 0.3 | 30 |
| | 6202ZZ | 15 | 35 | 11 | 0.6 | 7.75 | 3.6 | 19000 | 19 | 20 | 31 | 0.6 | 45 |
| | 6302ZZ | | 42 | 13 | 1 | 11.4 | 5.45 | 17000 | 20 | 22.5 | 37 | 1 | 83 |
| | 6003ZZ | | 35 | 10 | 0.3 | 6.8 | 3.35 | 20000 | 19 | 21 | 33 | 0.3 | 39 |
| | 6203ZZ | 17 | 40 | 12 | 0.6 | 9.6 | 4.6 | 17000 | 21 | 23 | 36 | 0.6 | 66 |
| | 6303ZZ | | 47 | 14 | 1 | 13.6 | 6.65 | 15000 | 22 | 25.5 | 42 | 1 | 113 |
| | 6004ZZ | | 42 | 12 | 0.6 | 9.4 | 5.05 | 17000 | 24 | 26 | 38 | 0.6 | 69 |
| | 6204ZZ | 20 | 47 | 14 | 1 | 12.8 | 6.65 | 14000 | 25 | 28 | 42 | 1 | 106 |
| | 6304ZZ | | 52 | 15 | 1.1 | 15.9 | 7.9 | 13000 | 26.5 | 28 | 45.5 | 1 | 145 |
| | 6005ZZ | | 47 | 12 | 0.6 | 10.1 | 5.85 | 15000 | 29 | 30.5 | 43 | 0.6 | 80 |
| | 6205ZZ | 25 | 52 | 15 | 1 | 14 | 7.85 | 12000 | 30 | 32 | 47 | 1 | 128 |
| | 6305ZZ | | 62 | 17 | 1.1 | 20.6 | 11.2 | 11000 | 31.5 | 36 | 55.5 | 1 | 235 |
| | 6006ZZ | | 55 | 13 | 1 | 13.2 | 8.3 | 12000 | 35 | 37 | 50 | 1 | 116 |
| | 6206ZZ | 30 | 62 | 16 | 1 | 19.5 | 11.3 | 10000 | 39 | 57 | 57 | 1 | 199 |
| | 6306ZZ | | 72 | 19 | 1.1 | 26.7 | 15 | 9200 | 36.5 | 42.5 | 65.5 | 1 | 345 |
| | 6007ZZ | | 62 | 14 | 1 | 16 | 10.3 | 11000 | 40 | 42 | 57 | 1 | 155 |
| | 6207ZZ | 35 | 72 | 17 | 1.1 | 25.7 | 15.3 | 9000 | 41.5 | 45 | 65.5 | 1 | 288 |
| | 6307ZZ | | 80 | 21 | 1.5 | 33.5 | 19.2 | 8400 | 43 | 47 | 72 | 1.5 | 469 |
| | 6008ZZ | | 68 | 15 | 1 | 16.8 | 11.5 | 9500 | 45 | 47 | 63 | 1 | 190 |
| | 6208ZZ | 40 | 80 | 18 | 1.1 | 29.1 | 17.8 | 8200 | 46.5 | 51 | 73.5 | 1 | 366 |
| | 6308ZZ | | 90 | 23 | 1.5 | 40.5 | 24 | 7500 | 48 | 53 | 82 | 1.5 | 636 |
| | 6009ZZ | | 75 | 16 | 1 | 20.9 | 15.2 | 8800 | 50 | 53.5 | 70 | 1 | 241 |
| | 6209ZZ | 45 | 85 | 19 | 1.1 | 31.5 | 20.4 | 7500 | 51.5 | 55.5 | 78.5 | 1 | 420 |
| | 6309ZZ | | 100 | 25 | 1.5 | 53 | 32 | 6700 | 53 | 61.5 | 92 | 1.5 | 829 |
| 6010ZZ | | 80 | 16 | 1 | 21.8 | 16.6 | 8300 | 55 | 57.5 | 75 | 1 | 261 | |
| 6210ZZ | 50 | 90 | 20 | 1.1 | 35 | 23.2 | 7000 | 56.5 | 60 | 83.5 | 1 | 454 | |
| 6310ZZ | | 110 | 27 | 2 | 62 | 38 | 6000 | 59 | 68 | 101 | 2 | 1006 | |
| 6011ZZ | | 90 | 18 | 1.1 | 27.3 | 20.2 | 7200 | 61.5 | 64 | 83.5 | 1 | 381 | |
| 6211ZZ | 55 | 100 | 21 | 1.5 | 42.5 | 28.3 | 6000 | 63 | 66.5 | 92 | 1.5 | 619 | |
| 6311ZZ | | 120 | 29 | 2 | 70.5 | 43.5 | 5300 | 64 | 72.5 | 111 | 2 | 1370 | |
| 6012ZZ | | 95 | 18 | 1.1 | 28.5 | 22.2 | 6800 | 66.5 | 69 | 88.5 | 1 | 412 | |
| 6212ZZ | 60 | 110 | 22 | 1.5 | 51.5 | 35 | 5300 | 68 | 74.5 | 102 | 1.5 | 783 | |
| 6312ZZ | | 130 | 31 | 2.1 | 81 | 51 | 5000 | 71 | 79 | 119 | 2 | 1720 | |

轴承
关节
轴承

E7



| 型号 | | d | D | B |
|-------|--------|----|----|----|
| 代码 | 轴承型号 | | | |
| BAY06 | 6000ZZ | 10 | 26 | 8 |
| | 6200ZZ | | 30 | 9 |
| | 6300ZZ | | 35 | 11 |

BAY06—6000ZZ



| 优惠价 | |
|-----|-----------|
| 数量 | 1~49 50~ |
| 价格 | 100% 另行报价 |



AUTOMATION EXPERT