


代码	类型		材质		热处理	表面处理
			国标	相当		
BKB01	圆形	普通锁紧型	45	S45C	28~32HRC	发黑

特点：该产品结构简单，内螺纹和端面同时加工，可确保偏摆精度要求。



螺纹精度：ISO 4H  
端面偏摆：0.005

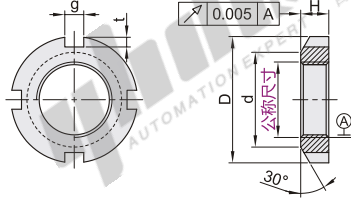

型号		螺距	D	H	g	t	d	
代码	公称尺寸							
BKB01	M10	0.75	18				13.5	
	M12		22	4	3		17	
	M15		25				21	
	M17	1.0	28	5	4		24	
	M20		32	6		2	26	
	M25		38				32	
	M30		45	7		5	38	
	M35		52	8			44	
	M40	1.5	58	9			50	
	M45		65	10	6	2.5	56	
	M50		70				61	
	M55		75	11			67	
	M60		80		7	3	73	
	M65		85				79	
	M70		92	12			85	
	M75		98	13			90	
	M80		105	15		8	3.5	95
	M85		110					102
	M90		120	16				108
	M95	2.0	125	17		10	4	113
M100		130					120	
M105		140	18				126	
M110		145		19			133	
M115		150				5	137	
M120		155	20		12		138	
M125		160		21			148	
M130		165					149	
M140		180	22		14	6	160	
M170	3.0	220	26		16	7	193	



请按图示订货

型号			
代码	公称尺寸	螺距	D
BKB01	M10	0.75	18
	M12	1.0	22

BKB01—M10—0.75



未税价(元)

● 优惠价

数量	1-9	10~
价格	100%	另行报价



交货期

5

