



内六角圆柱头组合螺钉



- 带弹簧垫圈
- 带弹簧垫圈、平垫圈

带弹簧垫圈

代码	类型			材质	表面处理	强度等级
TAK01	组合型	带弹簧垫圈	全牙	SCM435	三价锌	10.9

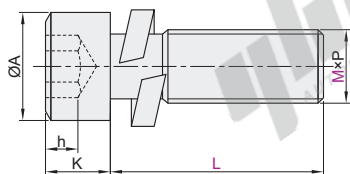

弹簧垫圈



视角标准：第一视角

型号	L											P	A			K		S			h	弹簧垫圈	
代码	M												螺距	公称尺寸	Max	Min	公称尺寸	Min	公称尺寸	Max		Min	d
TAK01	3	6	8	10	12	14	15	16	18	20		0.5	5.5	5.68	5.32	3	2.86	2.5	2.58	2.52	1.3	5.4	1.1×0.7
	4	6	8	10	12	14	15	16	18	20		0.7	7	7.22	6.78	4	3.82	3	3.08	3.02	2	7	1.4×1.0
	5	10	12	14	15	16	18	20	25		0.8	8.5	8.72	8.28	5	4.82	4	4.095	4.02	2.5	8.5	1.7×1.3	
	6	10	12	14	15	16	18	20	25	30		1.0	10	10.22	9.78	6	5.7	5	5.14	5.02	3	11.4	2.7×1.5
												1.25	13	13.27	12.73	8	7.64	6	6.14	6.02	4	14.3	3.2×2.0



请按图示订货

型号						
代码	M	L				
TAK01	3	6	8	10	12	14
	4	6	8	10	12	14

TAK01—M4—L10

TAK01—M4—L10



未税价(元)

优惠价	数量	1~99	100~
价格	100%	另行报价	





交货期


7

带弹簧垫圈、平垫圈



代码	类型			材质	表面处理	强度等级
TAK05	组合型	带弹簧垫圈、平垫圈	全牙	SCM435	三价锌	10.9
TAK06				SUS304	—	—

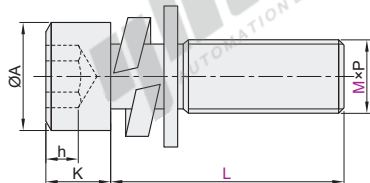

弹簧垫圈



平垫圈



视角标准：第一视角

型号		L										P	A		K		S			h	弹簧垫圈			平垫圈			
代码	M											螺距	公称尺寸	Max	Min	公称尺寸	Min	公称尺寸	Max		Min	d	b×t	D×t ₁			
TAK05 TAK06	3	6	8	10	12	14*	15	16	18*	20	25	0.5	5.5	5.68	5.32	3	2.86	2.5	2.52	1.3	1.3	5.4	1.1×0.7	8×0.5			
	4	6	8	10	12	14*	15	16	18*	20	22*	25	30	0.7	7	7.22	6.78	4	3.82	3	3.02	2	7	1.4×1.0	10×0.8		
	5	8	10	12	14*	15	16	18*	20	22*	25	30	0.8	8.5	8.72	8.28	5	4.82	4	4.02	2.5	2.5	8.5	1.7×1.3	12×0.8		
	6	10	12	14*	15	16	18*	20	22*	25	30	35	40*	1.0	10	10.22	9.78	6	5.7	5	5.02	3	3	11.4	2.7×1.5	13×1.0	
	8					15	16	18*	20	22*	25	30	35	40	50	1.25	13	13.27	12.73	8	7.64	6	6.02	4	4	14.3	3.2×2.0

① 带*规格不适用于TAK06。



请按图示订货

型号		L			
代码	M				
TAK05	3	6	8	10	12
TAK06	4				

TAK06—M4—L10

TAK06—M4—L10



未税价(元)

优惠价	数量	1~99	100~
价格	100%	另行报价	



交货期

7