

重载荷弹簧(红色)


ISO标准矩形弹簧

代码	类型	材质	最大压缩量
YSIH	重载荷型	SWOSC-V	L×30%

□ L尺寸公差

L	公差
89以下	±1
102以上	±1%

- ① 载荷(±10%)
- ② 直角度(3°以下)
- ③ 负载(N)=弹簧常数(N/mm)×压缩量
- ④ 理论使用次数: 30万次(L×20%为100万次)
- ⑤ 弹簧颜色和圈数可能会因生产批次不同而异, 但产品性能均符合标准, 不影响使用!
- ⑥ 参考标准 ISO 10243-2019

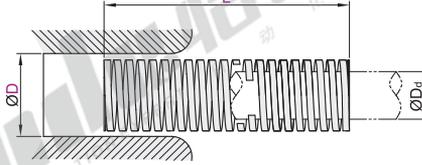

视角标准: 第一视角

型号			轴径 D _d	弹簧常数 N/mm	使用方法 30万次 F=L×30%			
代码	孔径D	长度L			Fmm	负载N		
YSIH	10	25	5	+0.7 0	23	7.5	172.5	
		32			17.5	9.6	168	
		38			14.8	11.4	168.7	
		44			13	13.2	171.6	
		51			-0.48 -1.18	11.2	15.3	171.4
		64			9.2	19.2	176.6	
		76			7.5	22.8	171	
		305			1.9	91.5	173.9	
	12.5	25	6.3	+1.53 +0.83	42.1	7.5	315.8	
		32			33.2	9.6	318.7	
		38			29.3	11.4	334	
		44			24.6	13.2	324.7	
		51			0 -0.7	19.6	15.3	299.9
		64			15	19.2	288	
		76			13.2	22.8	301	
		89			11.4	26.7	304.4	
	16	305	3.2	91.5	292.8			
		25	8	+1.43 +0.73	75.7	7.5	567.8	
		32			60.2	9.6	577.9	
		38			50.8	11.4	579.1	
		44			42.8	13.2	565	
		51			-0.12 -0.82	37.1	15.3	567.6
		64			30.3	19.2	581.8	
		76			25.7	22.8	586	
89	21.7	26.7			579.4			
20	102	18.9	30.6	578.3				
	305	6.3	91.5	576.5				
	25	10	+0.7 0	216	7.5	1620		
	32			168	9.6	1613		
	38			129	11.4	1471		
	44			112	13.2	1478		
	51			94	15.3	1438		
	64			72.1	19.2	1384		
	76			-0.95 -1.65	59.7	22.8	1361	
	89			50.5	26.7	1348		
	102			44.2	30.6	1353		
	115			38.4	34.5	1325		
127	34.1			38.1	1299			
139	31			41.7	1293			
25	152	28.2	45.6	1286				
	305	14	91.5	1281				
	25	12.5	+1.2 +0.2	375	7.5	2813		
	32			297	9.6	2851		
	38			219	11.4	2497		
	44			187	13.2	2468		
	51			-0.5 -1.2	156	15.3	2387	
	64			123	19.2	2362		
	76			99	22.8	2257		
	89			84	26.7	2243		

型号			轴径 D _d	弹簧常数 N/mm	使用方法 30万次 F=L×30%			
代码	孔径D	长度L			Fmm	负载N		
YSIH	25	102	12.5	+1.2 +0.2	73	30.6	2234	
		115			65	34.5	2243	
		127			57.7	38.1	2198	
		139			52.7	41.7	2198	
		152			-0.5 -1.2	47.8	45.6	2180
		178			41	53.4	2189	
		203			35.8	60.9	2180	
		305			22.9	91.5	2095	
	32	38	16	+1.5 +0.5	388	11.4	4423	
		44			324	13.2	4277	
		51			272	15.3	4162	
		64			212	19.2	4070	
		76			172	22.8	3922	
		89			141	26.7	3765	
		102			122	30.6	3733	
		115			-0.5 -1.5	107	34.5	3692
	40	127	20	+1.5 +0.5	93	38.1	3543	
		139			86	41.7	3586	
		152			78	45.6	3557	
		178			67.2	53.4	3588	
		203			59.1	60.9	3599	
		254			46.4	76.2	3536	
		305			38	91.5	3477	
		51			350	15.3	5355	
50	64	25	+2.0 +1.0	269	19.2	5165		
	76			219	22.8	4993		
	89			190	26.7	5073		
	102			163	30.6	4988		
	115			142	34.5	4899		
	127			-1.9 -2.9	128	38.1	4877	
	139			115	41.7	4796		
	152			105	45.6	4788		
	178			89	53.4	4753		
	203			77	60.9	4689		
	254			61	76.2	4648		
	305			51	91.5	4667		
64	413	19.2	7930					
76	339	22.8	7729					
89	288	26.7	7690					
102	245	30.6	7497					
115	215	34.5	7418					
127	192	38.1	7315					
139	168	41.7	7006					
152	154	45.6	7022					
178	134	53.4	7156					
203	117	60.9	7125					
254	89	76.2	6782					
305	73	91.5	6680					



型号		
代码	孔径D	长度L
YSIH	10	25
		32

请按照图示订货 YSIH-D10-L25



● 优惠价

数量	1~9	10~
价格	100%	另行报价

未税价(元)



交货期
7

氮气
弹簧

C4