


冷却水针

- 销定位型/销固定型
- 肩固定型


代码	类型	材质
TFD41	销定位型	SUS304
TFD42	销固定型	黄铜
TFD43	肩固定型	




销定位型
TFD41

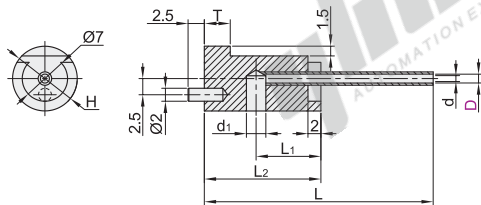

销固定型
TFD42

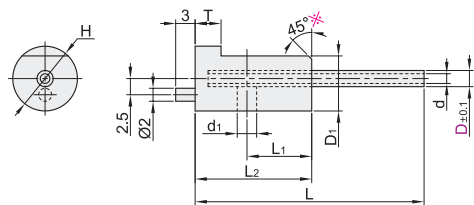

肩固定型
TFD43

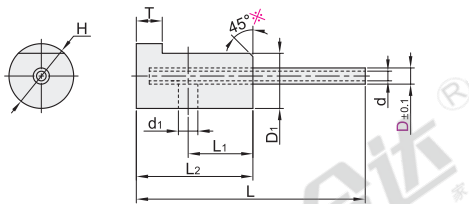

※D=10、12时，不进行45°加工。

视角标准：第一视角

代码	型号		L	H _{h8}		d	T	L ₁	L ₂	d ₁	D ₁
	D										
销定位型 TFD41	1.5		150			0.9					
	2.5			10		1.5	4			3	—
	3.2		200		⁰ / _{-0.022}	2.2		10	18		
销固定型 TFD42	4		200			3	5.1			3.5	7.2
	6		300	12		5				5.4	9.5
	8			15	⁰ / _{-0.027}	6		20		6.5	12
	10		350	18		8	5.6	11	22	8.5	11
	12			22	⁰ / _{-0.033}	10				10.5	14
肩固定型 TFD43	1.5		150			0.9					
	2.5			10	⁰ / _{-0.022}	1.5	4			3	8.5
	3.2		200			2.2		10	18		
	4					3	5.1			3.5	7.2
	6		300	12		5				5.4	9.5
	8			15	⁰ / _{-0.027}	6		20		6.5	12
	10		350	18		8	5.6	11	22	8.5	11
12			22	⁰ / _{-0.033}	10				10.5	14	



请按图示订货

型号	
代码	D
TFD41	1.5
	2.5

TFD41—D1.5



未税价(元)

优惠价	
数量	1~99 100~
价格	100% 另行报价



交货期
5

