


微型深沟球轴承

◀ 双面带防尘盖式 进口型

代码	类型	轴承类型 代码	轴承精度	后置代码	轴承材质	
					国标	相当
BAF...-J	进口型	6	JIS B 1514 6级	ZZ(双面带防尘盖)	GCr15	SUJ2
BAF...-J-SUS					9Cr18Mo	SUS440C

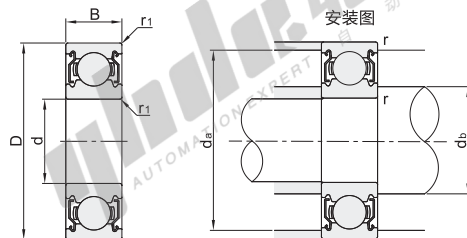

❏ 不承诺品牌。

视角标准：第一视角

代码	型号 轴承型号	d	D	B	r1 (min)	基本额定负载(N)		容许转速rpm (参考)	安装尺寸			重量(g) (参考)
						Cr (动)	Cor (静)		db (min)	da (max)	r (max)	
	682ZZ	2	5	2.3	0.08	143	40	85000	2.7	3.9	0.08	0.17
	692ZZ		6	3	0.15	281	79	75000	3	4.8	0.15	0.38
	602ZZ		7	3.5	0.15	328	102	60000	3.2	5.8	0.15	0.58
	682AZZ	2.5	6	2.6	0.08	178	59	71000	3.7	4.9	0.08	0.29
	692AZZ		7	3.5	0.15	328	102	63000	3.85	5.65	0.15	0.55
	673ZZ		6	2.5	0.08	242	94	71000	3.6	5.4	0.08	0.2
	683ZZ	3	7	3	0.1	390	130	63000	3.9	5.8	0.1	0.45
	693ZZ		8	4	0.15	560	180	60000		6.8		0.61
	603ZZ		9	5	0.15	571	189	56000	4.2	7.8	0.15	1.13
	623ZZ	4	10	4	0.2	640	224	50000		8.8		1.6
	633ZZ		13	5	0.2	1301	488	40000	4.6	11.4	0.2	3.43
	674ZZ		7	2.5	0.08	222	88	60000		6.4	0.08	0.28
	684ZZ	4	9		0.15	640	224	53000	5	7.8	0.1	1.01
	694ZZ		11	4	0.2	715	276	48000	5.2	9.8	0.15	1.8
	604ZZ		12		0.2	957	350		5.6	10.4		2.34
	624ZZ	5	13	5	0.3	1310	490	40000		11.4	0.2	3.2
	634ZZ		16		0.3	1340	523	36000	6	14	0.3	5.44
	675ZZ		8	2.5	0.1	218	131	53000	5.8	7.4	0.1	0.34
	685ZZ	5	11	5	0.15	715	282	45000	6.2	9.8		1.96
	695ZZ		13	4	0.2	1080	430	43000	6.6	11.4	0.2	2.4
	605ZZ		14	5	0.2	1330	505	40000		12.4		3.5
	625ZZ	6	16		0.3	1760	680	36000	7	14	0.3	4.8
	635ZZ		19	6	0.3	2336	896	32000		17		8.89
	676ZZ		10	3	0.1	496	218	45000	7.04	9.3	0.1	0.7
	686ZZ	6	13	5	0.16	1080	440	40000	7	11.8		2.69
	696ZZ		15		0.2	1350	530		7.6	13.4	0.2	3.8
	606ZZ		17		0.3	2190	865	38000		15		6
	626ZZ	7	19	6	0.3	2340	885	32000	8	17	0.3	8.1
	636ZZ		22	7	0.3	3333	1423	30000		20		14.5
	687ZZ		14	5	0.15	1170	505	40000	8.2	12.8	0.15	2.97
	697ZZ	7	17		0.3	1610	710			15		5.12
	607ZZ		19	6	0.3	2340	885	36000	9	17	0.3	7.51
	627ZZ		22	7	0.3	3300	1370	30000		20		12.9
	678ZZ	8	12	3.5	0.1	543	274	40000	8	11.33	0.1	0.99
	688ZZ		16	5	0.2	1610	715		9.6	14.4	0.2	4.02
	698ZZ		19	6	0.3	1990	865	36000		17		7.3
	608ZZ	8	22	7	0.3	3350	1400	34000	10	20	0.3	12
	628ZZ		24	8	0.3	4000	1590			22		17
	638ZZ		28	9	0.3	4560	1983	28000		26		30.3
	689ZZ	9	17	5	0.2	1720	820	33000	10.6	15.4	0.2	3.2
	699ZZ		20	6	0.3	2480	1090	32000	11	18		8.2
	609ZZ		24	7	0.3	3400	1450	31000			0.3	14
	629ZZ		26	8	0.6	4550	1960	30000	13	22		20

❏ 1Kg $\approx$ 9.81N



请按图示订货

型号		d
代码	轴承型号	
BAF...-J	682ZZ	2
BAF...-J-SUS	692ZZ	
	602ZZ	
BAF682ZZ-J-SUS		



未税价(元)

● 优惠价

数量	1~9	10~
价格	100%	另行报价



交货期
5



❏ 深沟球轴承装配在导向块上，对其他工件起到导向的作用。

