


品牌	轴承类型 代码	轴承精度	轴承材质	
			国标	相当
ZWZ	3	P0	GCr15	SUJ2



安装图

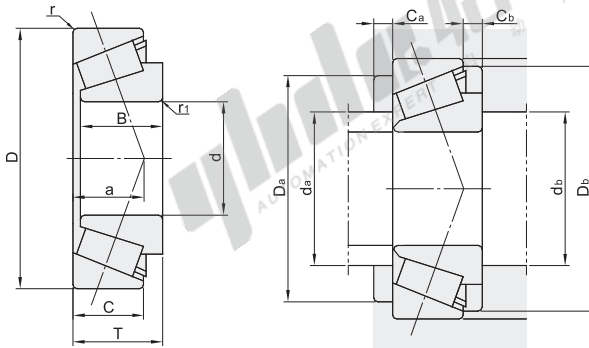

型号	d	D	T	B	C	r ₁ (mm)	r (mm)	基本额定负载(KN)		极限转速(r/min)		作用点 a	安装尺寸								重量(kg) 参考
								Cr(动)	Cor(静)	脂润滑	油润滑		d _a (max)	d _b (max)	D _a (mm)	D _a (max)	D _b (mm)	C _a (mm)	C _b (mm)		
32204-ZWZ	20	47	19.25	18	15	1	1	27.5	31	7500	10000	12	26	24	38	43	44	2	4.3	0.16	
30304-ZWZ			16.25	15	13	1.5	1.5	38.2	32.5	8000	11000	11	28	28	44	45	48	3	3.3	0.17	
32304-ZWZ			22.25	21	18			50	45		10000	13	26	27	43			4.5	0.24		
30205-ZWZ	25	52	16.25	15	13	1	1	34.8	33.5	7500		12		31	31	44	46	49		3.3	0.16
32205-ZWZ			19.25	18	16			40.5	46	7000	9500	13					48	50	2		0.2
33205-ZWZ			22	22	18	52.9	56	7500		14	30	29	42					50		4	0.22
30305-ZWZ	30		18.25	17	13	1.5	1.5	48	47	9000	13000	12	35		32	54	58		5.3	0.25	
31305-ZWZ								42.5	46	5600	7500	20	34		47	55	59	3		5	0.26
32206-ZWZ		62	21.25	20	17	1	1	57.3	65	6300	8500	15	36	36	52	56	58		4.3	0.36	
33206-ZWZ		25	25	19.5	70.5			75	5600	7500	16	37	34	51	58	60	2		5.5	0.34	
31306-ZWZ	35		20.75	19	14	1.5	1.5	54	59.5			34		38	55	67		6.8	0.49		
32306-ZWZ		72	28.75	27	23			86.2	84	5300	7000	18	38		37	59	65		66	6	0.55
32007-ZWZ			62	18	18	14	1	1	42	52	6000	8000		40	41	54	56	59	4	4	0.38
30207-ZWZ	40		18.25	17	15	1.5	1.5	57.3	56			15		44		62		67	3	3.3	0.32
32207-ZWZ		72	24.25	23	19			75	80	5300	7000	17	42		42		61	65		68	2
31307-ZWZ			80	22.75	21	15	2	1.5	70	76	4500	6000	25	45		62	71	76	3	7.5	0.52
32307-ZWZ			32.75	31	25	94.5			94	4800	6300	20	43		44		66	74		74	8.5
33108-ZWZ	45	75	26	26	20.5	1.5	1.5	90	104	5000	6700	18	65		65	68	71		5.5	0.5	
30208-ZWZ			19.75	18	16			70	73	4800	6300	17	49	47	69	73	75	3		3.8	0.43
32208-ZWZ		80	24.75	23	19	83.5	93			18			68	73	76		76		5.8	0.56	
31308-ZWZ	50		25.25	23	17	2	1.5	71.5	77			29	48		71		87		9.5	0.73	
32308-ZWZ		90	35.25	33	27			117	140	4000	5300	22	49	49	73	81	83	4		8.5	1.08
32009-ZWZ			75	20	20	15.5	1	1	66.4	80	4800	6300	17	52		65	71	73		6	0.34
33009-ZWZ			24	24	19	75.4			104			16	50	48	66	72	72			5	0.41
30209-ZWZ	55		20.75	19	16	1.5	1.5	80.3	83			18			74	80				0.46	
32209-ZWZ		85	24.75	23	19			90.3	105	4500	6000	20	53	52	73	78	81			5.8	0.58
31309-ZWZ				27.25	25	18	105	102	3600	4800	32	54		79	96			9.5	0.98		
30309-ZWZ	60		27.25	25	22	2	1.5	123	120	4000	5300	21	59		86	91	94			0.99	
32309-ZWZ			38.25	36	30			153	174	3600	4800	25	56	54	82		93	4		8.5	1.44
32010-ZWZ			80	20	20	15.5	1	1	67.8	88			18	57		76	78			0.38	
33010-ZWZ			24	24	19	77			111	4500	6000	17	55	58		70	77	76		4.5	0.44
30210-ZWZ	65		21.75	20	17	1.5	1.5	84.9	91.5	4300	5600	20		58	57		86		5	0.55	
32210-ZWZ		90	24.75	23	19			94	100			21			78	83	85	3		5.5	0.64
33210-ZWZ				32	32	24.5	119	160	3800	5000	23	57	58	75		88			7.5	1.17	
31310-ZWZ	70		29.25	27	19	2.5	1.5	110	124	3200	4300	35	63	10	86	102	104		10	1.25	
30310-ZWZ				23				141	140	3600	4800	23	65		95	103	4	6			
32310-ZWZ		110	42.25	40	33	2	2	173	214			27	61		60	90	100	102	5	9.5	1.26
32011-ZWZ	75		23	23	17.5	1.5	1.5	92.4	116			20	64	63	79		88			0.56	
33011-ZWZ		90	27	27	21			108	147	4000	5300	19	62	65	78	83	87	4.5		5.5	0.84
30211-ZWZ				22.75	21	18	102.8	106	3800	5000	21	64		88					5	0.71	
32211-ZWZ	80	100	26.75	25	21	2	1.5	108	133	3800	5000	22	62	64	87	91	95	4		5.7	0.88
33211-ZWZ			35	35	27			136	190	3400	4500	25	63		85	93	96	6	8		1.17
31311-ZWZ				31.5	29	25	2.5	2	155	166	2800	3800	38	68		92	112		3	11	1.78
30311-ZWZ			45.5	43	35	165			163	3200	4300	25	70	65	104	110		112	4	6.5	1.65
32311-ZWZ	85					2.5	2	248	280	3000	4000	29	66		99		111	5	11	2.43	
32912-ZWZ			85	17	17			14	40	65	3900	5100	17	65	68	76	81	79	4	3	0.28
33012-ZWZ				27	27	21	1.5	1.5	104	143			20	67	67	85		90		6	0.69
32012-ZWZ	90		37	23	17.5	1.5	1.5	93.5	122	3800	5000	21	68	68	83	88	92		5.5	0.6	
30212-ZWZ				23.75	22			19	111	114	3400	4500	23		69	96	101	103	4		5
32212-ZWZ		110	29.75	28	24	2	1.5	133	170			25		69		95	104		5.8	1.26	
33212-ZWZ			38	38	29			168	235	3000	4000	27			68		93	103	105	6	9
31312-ZWZ	100		33.5	31	22	3	2.5	138	155	2600	3600	41			103		124	5	12	1.92	
30312-ZWZ								163	185	3000	4000	26	76		72	112	118	121	3.5	7.5	1.96
32312-ZWZ		130	48.5	46	37	229	289	2600	3600	31	72		107		122	6	12	2.9			

型号	d	D	T	B	C	r ₁ (mm)	r (mm)	基本额定负载(KN)		极限转速(r/min)		作用点 a	安装尺寸						重量(kg) 参考			
								Cr(动)	Cor(静)	脂润滑	油润滑		d _a (max)	d _b (max)	D _a (min)	D _a (max)	D _b (min)	C _a (min)		C _b (min)		
32013-ZWZ	65	100	23	23	17.5	1.5		94.8	127	3400	4500	22	72	72	90	93	97	4	5.5	0.61		
33013-ZWZ			27	27	21			108	158			21	73	87	3.5			6	0.73			
30213-ZWZ		120	24.75	23	20	2		131	134	3000	4000	24	77		106	111	114	4	5	1.14		
32213-ZWZ			32.75	31	27			151	192			28		74	104					5.8	1.58	
33213-ZWZ			41	41	32			222	282			29	75		102			113	115	6	9	2
31313-ZWZ					23			171	198			2800	3800	44				77	111	128	134	5
30313-ZWZ		140	36	33	28	3	2.5	192	228	2600	3600	28	83	72	120	131	131	3.5	8	2.49		
32313-ZWZ			51	48	39			264	335			2400	3400	33	79	77		117	128	6	12	3.68



请按图示订货

型号

30313-ZWZ
32313-ZWZ

未税价(元)

● 优惠价

数量 1~9 10~
价格 100% 另行报价

交货期

7

怡合达®
AUTOMATION EXPERT 自动化专家怡合达®
AUTOMATION EXPERT 自动化专家