
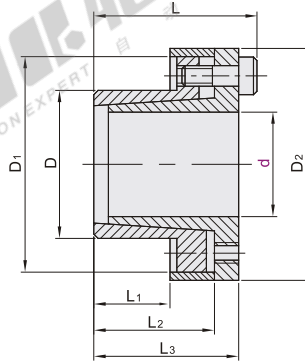


简易型 · 带定心功能 ▶
挡圈分离式

免键胀套

代码	类型	材质	表面处理
EUX01	简易型	带定心功能	S45C
EUX02			
			—
			喷砂镀镍

※拆卸用螺孔




推荐安装尺寸：

轴：h8

毂：H8

类似JB/T7934 Z11型免键胀套



视角标准：第一视角

※拆卸用螺孔的螺径与锁紧螺栓相同。

型号		D	L ₁	L ₂	L ₃	L	D ₁	D ₂	传递的 轴向力	传递 扭矩	接触面压强		DIN912-12.9级锁紧螺钉		
代码	d								轴	毂	数量	规格	锁紧扭矩 Ts(Nm)		
									Ft(KN)	Ft(Nm)				N/mm ²	N/mm ²
EUX01	8	15	12	21	22	25	24	27	10	39	299	159	3	M4×10	5.2
	9	16					25	28		44	227	128			
	10							49		205					
	11	18	14	23	26	30	28	32		53	186	114		M4×12	
	12								58	171					
	14	23					33	38	68	146	89				
	15	24	16	29	36	42	40	45	16	120	196	123	4		
	16									128	184				
	17	26					42	47		176	184	127			
	18		18	31	38	44			191	194	134				
	19	27					43	49		202	183	129			
	20	28					44	50	21	213	174	124			
	22	32					48	54		234	114	78			
	24	34								255	105	74	6	M6×18	17
	25						50	56		266	100				
	EUX02	28	39	25	38	45	51	55	61	27	373	112	81		
30		41					57	62	32	480	126	92			
32		43					59	65		511	98	73			
35		47					62	69	43	747	120	89			
38		50	32	45	52	58	66	72		811	110	84			
40		53					69	75	959		83	8			
42		55					71	78	48	1007	105		80		
45		59					80	86	79	1781	130	99			
48		62	45	62	70	78	81	87		1900	122	94			
50		65					84	92		2473	117	90	M8×22	42	
55		71					92	98	99	2721	106	82			
60		77	55	72	80	88	98	104		2968	97	76	9		
65	84					105	111		3215	90	69				



型号		D
代码	d	
EUX01	8	15
EUX02	9	
	10	16

EUX01 — d8



● 优惠价

数量	1~4	5~
价格	100%	另行报价

未税价(元)



交货期

5

