
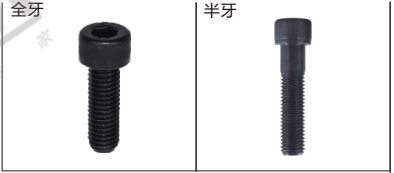


内六角圆柱头螺钉

全牙 / 半牙 · 粗牙 / 细牙
标准型 强度等级 12.9 材质 ML40Cr

代码	类型	螺纹	材质	表面处理	强度等级
TAC01	全牙/半牙	粗牙	ML40Cr	发黑	12.9
TAC04	标准型	全牙			
TAC06	全牙/半牙	细牙			

高品质代码: TAC07, SCM435材质, 详情怡合达网站搜索TAC07.



适用标准: DIN 912-1983, GB/T 70.1-2000



粗牙(全牙/半牙)

型号	M	L	V	P 螺距	D		K		S			
					max	min	max	min	max	min		
TAC01	2	3 4 5 6 8 10 12 14 16 20	全牙	0.4	3.98	3.62	2	1.86	1.56	1.52		
	2.5	4 5 6 8 10 12 16 18 20 25 30		0.45	4.68	4.32	2.5	2.36	2.06	2.02		
	2.6	4 5 6 8 10 12 16 18 20 25 30		18	0.5	5.68	5.32	3	2.86	2.58	2.52	
	3	4 5 6 6.5 8 10 12 14 16 18 20 22 25										20
	4	5 6 8 10 12 14 16 18 20 22 25		22	0.8	8.72	8.28	5	4.82	4.095	4.02	
	5	6 8 10 12 14 16 18 20 22 25										24
	6	8 10 12 14 16 18 20 22 25 30		28	1.25	13.27	12.73	8	7.64	6.14	6.02	
	8	10 12 14 16 18 20 22 25 30 35										32
	10	12 14 16 18 20 22 25 30 35 40		36	1.75	18.27	17.73	12	11.57	10.175	10.025	
	12	16 20 25 30 35 40 45 50										40
	14	25 30 35 40 45 50 55		44	2.0	24.33	23.67	16	15.57		14.212	
	16	30 35 40 45 50 55 60										48
	18	35 40 45 50 55 60 65		52	2.5	30.33	29.67	20	19.48		17.23	
	20	40 45 50 55 60 65 70 75										56
	22	45 50 55 60 65 70 75 80		60	3.0	36.39	35.61	24	23.48	19.275	19.065	
	24	50 55 60 65 70 75 80 85										
		80 85 90 95 100 110 120 125 130 135 140 145 150 160 170 180 190 200 210 220 230 240 250 260 270 280 290 300 310 320 330 340 350 600										

粗牙(全牙)

型号	M	L	V	P 螺距	D		K		S		
					max	min	max	min	max	min	
TAC04	3	30 35 40 45 50	全牙	0.5	5.68	5.32	3	2.86	2.58	2.52	
	4	30 35 40 45 50		0.7	7.22	6.78	4	3.82	3.08	3.02	
	5	30 35 40 45 50 55 60 65 70 75 80 90 100		0.8	8.72	8.28	5	4.82	4.095	4.02	
	6	35 40 45 50 55 60 65 70 75 80 90 100		1.0	10.22	9.78	6	5.7	5.14	5.02	
	8	40 45 50 55 60 65 70 75 80 90 100 110 120 130 140 150		1.25	13.27	12.73	8	7.64	6.14	6.02	
	10	45 50 55 60 65 70 75 80 90 100 110 120 130 140 150		1.5	16.27	15.73	10	9.64	8.175	8.025	
	12	55 60 65 70 75 80 90 100 110 120 130 140 150		1.75	18.27	17.73	12	11.57	10.175	10.025	
	14	60 65 70 75 80 90 100 110 120 130 140 150		2.0	21.33	20.67	14	13.57	12.212	12.032	
	16	65 70 75 80 90 100 110 120 130 140 150 160 170 180 190 200									
	18	70 75 80 90 100 110 120 130 140 150		2.5	27.33	26.67	18	17.57	14.212	14.032	
	20	80 90 100 110 120 130 140 150									
22	80 90 100 110 120 130 140 150 160 170 180 190 200	3.0	36.39	35.61	20	19.48	17.23	17.05			
24	90 100 110 120 130 140 150 160 170 180 190 200										

细牙(全牙/半牙)

型号	M	L	V	P 螺距	D		K		S								
					max	min	max	min	max	min							
TAC06	6	10 12 16 20 25 30	全牙	0.75	10.22	9.78	6	5.7	5.14	5.02							
		35 40 45 50															
	8	12 16 20 25 30 35									1.0	13.27	12.73	8	7.64	6.14	6.02
		40 45 50 55 60 65 70 80 90 100															
	10A	20 25 30 35 40 45									1.5	16.27	15.73	10	9.64	8.175	8.025
		50 60 65 70 75 80 90 100															
	12	16 20 25 30 35 40 45 50									2.0	18.27	17.73	12	11.57	10.175	10.025
		55 60 65 70 75 80 85 90 100															
	14	25 30 35 40 45 50 55									2.5	21.33	20.67	14	13.57	12.212	12.032
		60 65 70 75 80 85 90 100															
16	25 30 35 40 45 50 55 60	3.0	24.33	23.67	16	15.57		14.212	14.032								
	65 70 75 80 90 100 110 120 130 140 150																
18	40 45 50 55 60 65	3.5	27.33	26.67	18	17.57											
	70 75 80 90 100 110 120 140 150																
20	40 45 50 55 60 65 70 75	4.0	30.33	29.67	20	19.48											
	80 85 90 100 110 120 130 140 150																
22	50 55 60 65 70 75	4.5	33.39	32.61	22	21.48		17.23	17.05								
	80 90 100 110 120 130 140 150																
24A	50 55 60 65 70 75 80	60	36.39	35.61	24	23.48	19.275	19.065									

螺丝·吊环·螺母·C2



请按图示订货

代码	M	L
TAC01	3-8	6-30
TAC04	3-8	5-30
TAC06	3-8	5-30

TAC01-M3-L5



优惠价

数量 1~49 50~
价格 100% 另行报价

未税价(元)



交货期

3