


# 平头条纹拉铆螺母

代码	类型	螺纹	材质	表面处理
TBY05	平头条纹拉铆螺母	粗牙	碳钢	镀锌
TBY06			不锈钢	—



柳接后

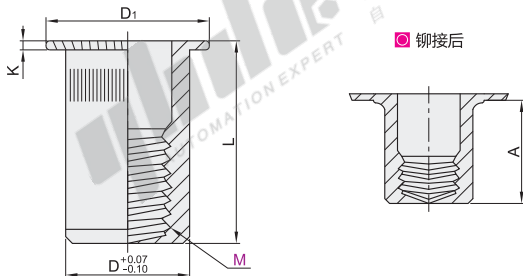

扫一扫  
观看产品视频

视角标准：第一视角

型号 代码	M	嘴位编码	P 螺距	柳接范围		A	安装孔径 <sup>+0.1</sup> <sub>0</sub>	D	D <sub>1</sub>	K	L
				Max	Min						
(碳钢) TBY05	3	0	0.5	1.5	0.5	6	5	4.9	8	0.8	10
		1		2.0	0.5						10.5
	4	0	0.7	3.5	2.0	7.5	6	5.9	9	1	12
		1		2.5	0.5						13
	5	0	0.8	5.0	2.5	9.2	7	6.9	10	1.3	16.5
		1		3.0	0.5						15.5
	6	1	1.0	3.0L	0.5	10.5	9	8.9	12.3	1.5	15.5
				5.5	3.0				13		19.5
				6.0	3.0				13		19.5
	8	1	1.25	3.5L	1.0	11.5	11	10.9	14.5	1.7	18.5
				6.0	3.5				16		21
				6.0L	3.5				16		21
10	2	1.5	4.0	1.0	13.5	13	12.9	17	1.6	21.5	
			6.5	4.0				17		24	
			6.5L	4.0				19		24	
12	1	1.75	3.5	1.0	15	12	11.9	16	1.7	19	
			4.0	1.0				13.5		22	
			6.5	4.0				14		25	
	2		3.5	1.0	15	15	14.9	18	1.7	25	
	3		6.0	3.5	16	16	15.9	22	2	28	

型号 代码	M	嘴位编码	P 螺距	柳接范围		A	安装孔径 <sup>+0.1</sup> <sub>0</sub>	D	D <sub>1</sub>	K	L
				Max	Min						
(不锈钢) TBY06	4	0	0.7	2.0	0.5	6.5	6	5.9	9	0.8	10.5
	5	1		2.5	0.5						8
	6	0	1.0	3.0	0.5	9.2	9	8.9	12.3	1.3	15.5
	8	1		3.5	1.0						11.5
10	0	1.5	4.0	1.0	13.5	13	12.9	17	1.6	21	

螺丝·螺母·垫圈·吊环·C2



请按图示订货

型号		嘴位编码
代码	M	
TBY06	4	0
	4	0

TBY06—M5—1



未税价(元)

● 优惠价

数量	1~99	100~
价格	100%	另行报价



交货期

7

