


代码	类型	材质	表面处理		附件
			主体	丝杠支座组件	
LEF40	整合型传动座	铝合金	S50C	喷细砂本色阳极氧化	发黑 调整环:2个 锁紧螺母:1个
LEF41					



代码	型号			适用电机类型	D1	P.C.D	M2	B1	B2	D2	D3	Z	H1	H2	J	K	L
	适用丝杠轴径 d	适用电机法兰 F	中心高 h														
发黑 LEF40 无电解镀镍 LEF41	8	38	21	伺服电机	30	45	M3	67	9	28	11.5	64	41	19	43	40	10
	10	38	25			46	M4										
		38				45	M3			34	14	70	46			42	
		40			30	46	M4	74	10					23	46		10
	12	38				45	M3										
		40				46	M4			36	15					44	
无电解镀镍 LEF41		60	31		50	70	M5	84					62		56		
		60						97				98	61	26	63	62	13
	15	60	41		70	90	M6	106	15	40	20		82	36	72	82	16
		80			50	70	M5	117				116	70	30	69	70	
	20	60	35		70	90	M6	127	22	57	25		128	82	36	79	82
		80	41									128	82	36			

适用丝杠轴径 d	适用电机法兰 F	N	Q	L1	T1	W1	W2	X1	X2	Y1	Y2	M1 (细牙螺纹)	S	丝杠支座				建议电机规格	
														固定侧		建议支撑侧		止口规格	安装P.C.D
														LEF40	LEF41	LEF40	LEF41		
8	38	12	12	47	52	40	35	5	14	5.5	6.5	M8×1.0	5.5	LEB01-8	LED01-8	—	—		45
	40																		46
10	38				56	42	42					M10×1.0		LEB01-10	LED01-10	LEB31-10	LED31-10	30	45
	40												6.5						46
12	38	14	14	54			44	6	16	5.5		M12×1.0		LEB01-12	LED01-12	LEB31-12	LED31-12		45
	40										8								46
	60		18	58	80	62							8.5			LEB33-12			
15	60	17		71				52	8	18	10	M15×1.0		LEB01-15	LED01-15	LEB33-15		50	70
	80		23	74	106	82										LEB33-1541		70	90
20	60			77	94	70							10.5			LEB33-20		50	70
	80	24	23	87	106	82	68	14	28	11	11	M20×1.0		LEB01-20	LED01-20	LEB33-2041		70	90

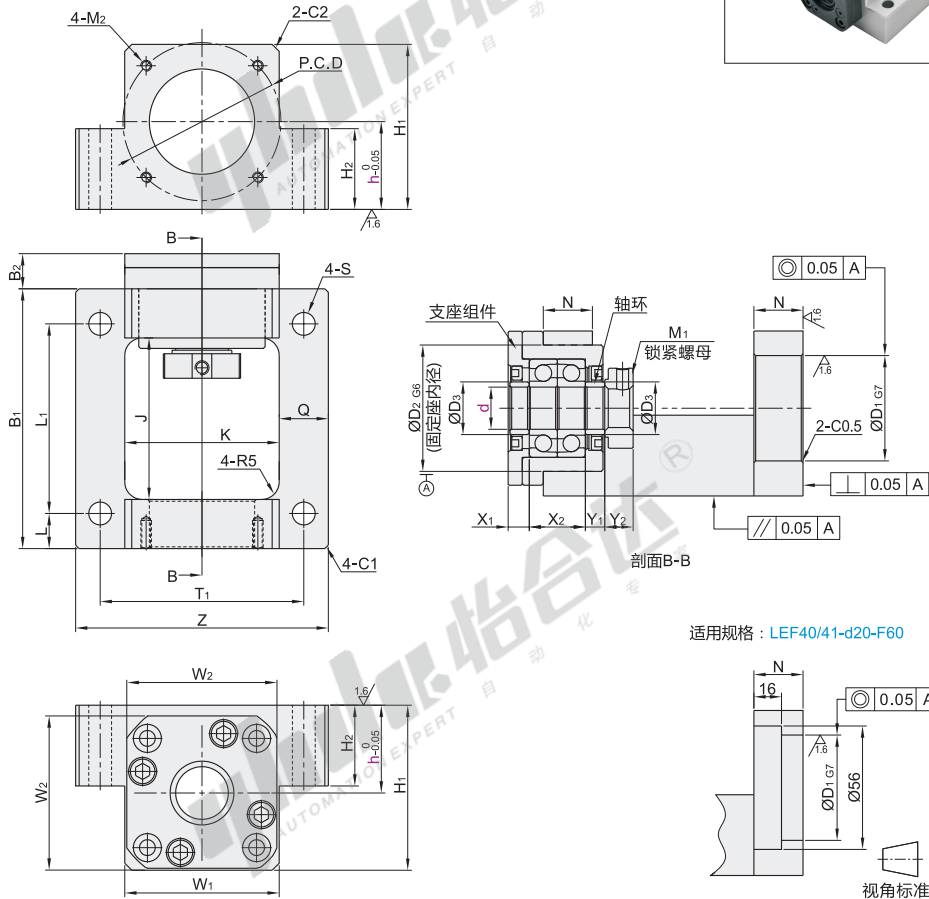

型号			
代码	适用丝杠轴径 d	适用电机法兰 F	中心高 h
LEF40	8	38	21

LEF40—d8—F38—h21



优惠价	
数量	1~4 5~
价格	100% 另行报价

