



双列角接触球轴承

接触式
带橡胶密封圈型

品牌	轴承类型代码	轴承精度	后置代码	轴承材质	
				国标	相当
KOYO	5	JIS B 1514 P0	2RS: 双面带橡胶密封圈接触式	GCr15	SUJ2



安装图

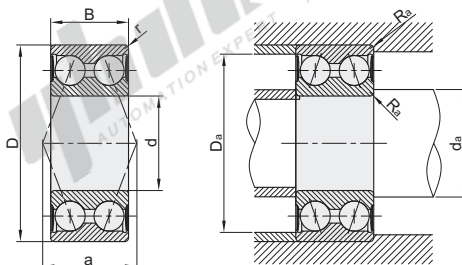

视角标准：第一视角

型号	主要尺寸(mm)				基本额定负载		极限转速(rmp)		a 作用点 (mm)	安装相关尺寸(mm)			重量 (kg) (参考)
代码	d	D	B	r (min)	Cr(动) KN	Cor(静) KN	脂润滑	油润滑		da (min)	Da (max)	Ra (max)	
5203-2RS-KOYO	17	40	17.5	0.6	15.9	8.35	11000	14000	20	21.5	35.5	0.6	0.091
5204-2RS-KOYO	20	47	20.6		20	10.8	8800	12000	23.5	25.5	41.5		0.12
5205-2RS-KOYO	25	52		1	23.6	13.8	7700	10000	26.1	30.5	46.5		0.19
5206-2RS-KOYO	30	62	23.8		31.7	18.3	6400	8600	30.8	35.5	56.5	1	0.29
5207-2RS-KOYO	35	72	27		39.7	24.6	5500	7300	36.1	42	65		0.43
5208-2RS-KOYO	40	80	30.2	1.1	45.7	29.1	5000	6700	39.2	47	73		0.57
5209-2RS-KOYO		85			52.1	33.9	4600	6100	42.2	52	78		0.62
5309-2RS-KOYO	45	100	39.7	1.5	86.1	51.4	4100	5500	51	53.5	91.5	1.5	1.42
5210-2RS-KOYO	50	90	30.2	1.1	55.2	37.9	4300	5600	44.5	57	83	1	0.67
5211-2RS-KOYO	55	100	33.3	1.5	66.1	44.7	3800	5100	50.2	63.5	91.5	1.5	0.96



请按图示订货

型号	d
52032RS-KOYO	17
52042RS-KOYO	20

52042RS-KOYO



未税价(元)

● 优惠价	
数量	1~49 50~
价格	100% 另行报价



交货期

7