


带通气孔型

内螺纹型	外螺纹型	材质		硬度	表面处理
		国标	相当		
YDJ41	YDJ61	GCr15	SUJ2	淬火硬度43~48HRC	—
YDJ42	YDJ75				
YDJ46	YDJ66	0Cr18Ni9	SUS304	淬火硬度HRC56~, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm
YDJ51	YDJ71	9Cr18Mo	SUS440C	—	—




自制

内螺纹型  
YDJ41/42/46/51

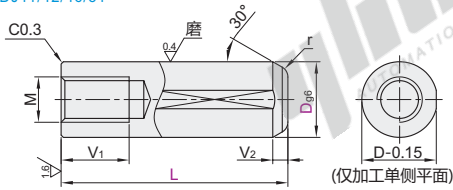


(仅加工单侧平面)

外螺纹型  
YDJ61/66/71/75

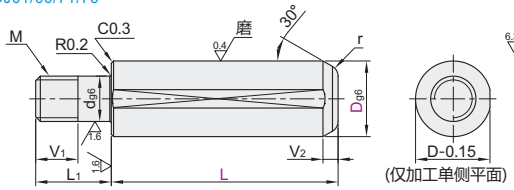

(仅加工单侧平面)



内螺纹型

型号	Dg6	L	M	V1	V2	r
YDJ41	5	10 12 15 20 25 30	M3	6	1.0	1.0
	6	10 12 15 20 25 30	M4	8		
YDJ42	8	10 12 15 20 25 30	M5	1.5	1.5	
YDJ46	10	15 20 25 30	M6			
YDJ51	12	15 20 25 30		2.0	2.0	

① D=6, L=10时, V1=6。

② 当L-V1<6时, 存在螺纹底孔贯穿的情况。

外螺纹型

型号	Dg6	L	L1	d <sub>g6</sub>	M	V1	V2	r
YDJ61	5	(10) (12) 15 20 25 30	12	3	M3	7	1.0	1.0
	6	(10) (12) 15 20 25 30	15	4	M4	10		
YDJ66	8	(10) (12) 15 20 25 30	20	5	M5	1.5	1.5	
YDJ75	10	(12) 15 20 25 30		6	M6			
YDJ71	12	15 20 25 30				2.0	2.0	

① ( )内L尺寸仅适用于YDJ66/71。

内螺纹型

代码	Dg6	L
YDJ41	5	10 12 15 20 25 30
YDJ42	6	10 12 15 20 25 30
YDJ46	8	10 12 15 20 25 30
YDJ51	10	15 20 25 30

YDJ41—D6—L12

外螺纹型

代码	Dg6	L
YDJ61	5	10 12 15 20 25 30
YDJ66	6	10 12 15 20 25 30
YDJ71	8	10 12 15 20 25 30
YDJ75	10	15 20 25 30

YDJ66—D6—L10

优惠价

数量 1~4 5~  
 价格 100% 另行报价

交货期

3 5 6



① 无表面处理无硬度 ② 无表面处理 ③ 有表面处理

螺栓固定型

代码	类型	形状	材质	硬度	表面处理	
YDL01	螺栓固定型	圆型	9CrWMn SKS3	淬火硬度58~61HRC	—	
YDL02		环槽型		淬火硬度58~61HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm	
YDL11		多棱型		—	—	—
YDL12				—	淬火硬度58~61HRC, 镀层硬度850HV~	镀硬铬, 镀层厚度3~5μm



自制








① D<P时(大头)

② D=P时(直杆)

③ D=P时, 多棱型带有退刀槽

④ D>P时(小头)



代码	型号	Dg6	最小单位0.01 P	最小单位1 L	最小单位0.1 B	d	V1	V2	E	C	(W)	
											D<P时	D≥P时
圆型	6	-0.004 -0.012	2.00~10.00	3~15	—	4.5	5	5	3	1	3	1.5
	8S	—	3.00~13.00	3~18	2.0~20.0	6.5	3	6	—	0.5	3.5	1.8
	8	-0.005 -0.014	—	4~18	—	—	6	—	—	1.5	—	—
	10S	—	3.00~15.00	4~22	—	8	3	—	4	0.5	4	2.2
	10	—	—	5~22	—	—	8	8	—	2	2	—
多棱型	12S	—	5.00~16.00	5~26	3.0~20.0	10	4	—	—	0.5	5	2.5
	12	—	—	6~26	—	—	8	8	—	2	—	—
	16S	-0.006 -0.017	10.00~25.00	7~35	—	14	4	—	5	0.5	7	4
	16	—	—	8~35	5.0~20.0	—	8	—	—	3	—	—
	20	-0.004 -0.012	13.00~30.00	10~42	—	12	8	—	—	3	9	5

螺栓固定型

代码	型号	Dg6	最小单位0.01 P	最小单位1 L	最小单位0.1 B
YDL01	6	-0.004 -0.012	2.00	3~15	—
YDL02	8S	-0.005 -0.014	3~13	3~18	2.00

YDL01—D6—P8—L10—B10

优惠价

数量 1~4 5~  
 价格 100% 另行报价

交货期

5 6

① 无表面处理 ② 有表面处理