


圆螺母

- 总目录
- 目录
- 使用说明
- 螺钉
- 螺栓
- 螺柱
- 铆接类
- 组合件
- 螺母
- 垫圈
- 挡圈
- 树脂类
- 带挡块螺钉
- 柱塞
- 紧固件进口专区
- 紧固件专用配件
- 经济型轴承
- 标准型轴承
- 进口型轴承
- 品牌轴承
- 带座轴承
- 吊环
- 索具
- 电子焊接工具
- 手动工具
- 电动工具
- 气动工具
- 储存工具
- 量具
- 刀具
- 技术资料


代码	类型	螺纹	材质		表面处理	适用标准	强度等级
			国标	相当			
TBK71	小圆螺母	细牙	45	S45C	发黑	GB/T 810	8
TBK74	圆螺母		0Cr18Ni9	SUS304	—	—	—
TBK75							



小圆螺母
TBK71

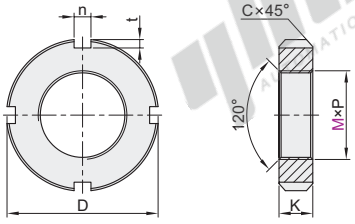

圆螺母
TBK74
TBK75

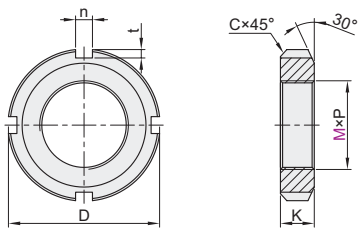

① M≤100, N(槽数)=4
M≥105, N(槽数)=6




小圆螺母

型号	螺距P	D	C	K	n (max)	t (max)
代码 M						
10	1.0	20				
12	1.25	22			4.3	2.6
14		25				
16		28	0.5	6		
18		30				
20		32				
22		35				
24		38			5.3	3.1
27	1.5	42				
30		45		8		
33		48				
36		52				
39		55			6.3	3.6
42		58				
48		68				
52		72				
56		78		10		
60		80				
64		85			8.36	4.25
68		90				
72		95				
76		100				
80		105				
85		110		12	10.36	4.75
90		115				
95	2.0	120				
100		125				
105		130				
110		135			12.43	5.75
115		140				
120		145		15		
125		150				
130		160			14.43	6.75
140		170				
150		180		18		
160		195				
170		205				
180	3.0	220				
190		230		22	16.43	7.9
200		240				

圆螺母

型号	螺距P	D	C	K	n (max)	t (max)
代码 M						
10	1.0	22				
12	1.25	25			4.3	2.6
14		28				
16		30	0.5	8		
18		32				
20		35				
22		38			5.3	3.1
24		42				
25		45				
27		48	1			
30	1.5	52		10		
33		55				
35		58			6.3	3.6
36		62				
39		68	1.5			
40		72		12	8.36	4.25
42		78				
45		80				
48		85				
50		90				
72*	2	105		15	10.36	4.75

① 带*的规格不适用TBK75。

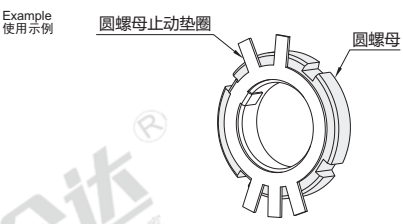

① 使用时圆螺母止动垫圈装在螺母开槽的那一侧，紧固后将内外止动耳折弯放到槽内。圆螺母紧固后，将内外耳扳成轴向，分别卡在轴上的键槽和圆螺母的开口处，这样，圆螺母就不会由于轴的转动而松脱。



小圆螺母

型号	代码	M	D
	(TBK71)	12	22

请按图示订货 TBK71—M10



优惠价

数量	1~45	46~
价格	100%	另行报价

未标价(元)



交货期

7
