


两端一阶型


中部公差h7型

30度梯形丝杠

代码	类型	螺纹旋向	材质		表面处理
			国标	相当	
LJF02	两端一阶型	一端左旋	45	S45C	发黑
LJF06		一端右旋	Y1Cr18Ni9	SUS303	—

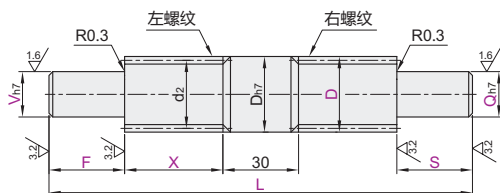

6.3/



视角标准：第一视角

型号	最小单位0.5			V-Q 选择	最小单位0.5	螺距 P	有效直径 d2	螺纹牙根直径(min)	螺纹升角
代码	D	L	F-S		X				
LJF02 LJF06	14	70~1000	3≤F≤V×8 3≤S≤Q×8	8 9 10	① 请根据使用要求指定尺寸。	3	12.5	10.1	4°22'
	16	80~1200		8 9 10 12		3	14.5	12.1	3°46'
	20			9 10 12 14 15		4	18	15.1	4°03'
	25	120~1200	V、Q≤9时, 3≤F≤V×6 3≤S≤Q×6	10 12 14 15 16 17		5	22.5	19	4°03'
	28			12 14 15 16 17 20		5	25.5	22	3°34'
	32	150~1200		12 14 15 16 17 20 25		6	29	24.5	3°46'



可选加工

可 选 加 工	增加挡圈槽	增加两平面	增加端面粗牙螺孔	增加外螺纹	增加四平面	增加键槽																																																																																																																																																					
代码	AC(I)(V部) AQ(I)(Q部)	SC(I)(V部) SQ(I)(Q部)	MC(I)(V部) MQ(I)(Q部)	BV(V部) BC(Q部)	ZC(I)(V部) ZQ(I)(Q部)	KV(I)(V部) KC(I)(Q部)																																																																																																																																																					
技术说明	选型方法 AC13.3 ① 最小单位0.1 ② 挡圈槽尺寸详见下页。	选型方法 SC5-SW10-SY8 ① 最小单位0.5	选型方法 MC24 <table><tr><th>V-Q</th><th>MC-MQ选择</th></tr><tr><td>6</td><td>3</td></tr><tr><td>7-8</td><td>3-4</td></tr><tr><td>9-10</td><td>3-5</td></tr><tr><td>12-14</td><td>3-4-5-6</td></tr><tr><td>15-16</td><td>3-4-5-6-8</td></tr><tr><td>17-18</td><td>3-4-5-6-8-10</td></tr><tr><td>20-22</td><td>3-4-5-6-8-10-12</td></tr><tr><td>25-28-30</td><td>3-4-5-6-8-10-12-16</td></tr><tr><td>32-35</td><td>3-4-5-6-8-10-12-16-20</td></tr><tr><td>36-40-50</td><td>3-4-5-6-8-10-12-16-20-24</td></tr></table>	V-Q	MC-MQ选择	6	3	7-8	3-4	9-10	3-5	12-14	3-4-5-6	15-16	3-4-5-6-8	17-18	3-4-5-6-8-10	20-22	3-4-5-6-8-10-12	25-28-30	3-4-5-6-8-10-12-16	32-35	3-4-5-6-8-10-12-16-20	36-40-50	3-4-5-6-8-10-12-16-20-24	选型方法 BC20 ① BV, BC≤F, S-螺距×3 <table><tr><th>V-Q</th><th>M×螺距</th></tr><tr><td>6</td><td>M6×0.75</td></tr><tr><td>8</td><td>M8×1.0</td></tr><tr><td>10</td><td>M10×1.0</td></tr><tr><td>12</td><td>M12×1.0</td></tr><tr><td>14</td><td>M14×1.0</td></tr><tr><td>15</td><td>M15×1.0</td></tr><tr><td>17</td><td>M17×1.0</td></tr><tr><td>20</td><td>M20×1.0</td></tr><tr><td>25</td><td>M25×1.5</td></tr><tr><td>30</td><td>M30×1.5</td></tr><tr><td>35</td><td>M35×1.5</td></tr><tr><td>40</td><td>M40×1.5</td></tr></table>	V-Q	M×螺距	6	M6×0.75	8	M8×1.0	10	M10×1.0	12	M12×1.0	14	M14×1.0	15	M15×1.0	17	M17×1.0	20	M20×1.0	25	M25×1.5	30	M30×1.5	35	M35×1.5	40	M40×1.5	选型方法 ZC10-W8-A8 ① 最小单位0.5 ② A=5~20 ZC=V ZQ=Q W(最小单位1) <table><tr><th>V-Q</th><th>ZC</th><th>ZQ</th><th>W</th></tr><tr><td>6-7</td><td>5</td><td>6</td><td>7</td></tr><tr><td>8</td><td>6</td><td>7</td><td>8</td></tr><tr><td>9</td><td>7</td><td>8</td><td>9</td></tr><tr><td>10</td><td>8</td><td>9</td><td>10</td></tr><tr><td>12</td><td>9</td><td>10</td><td>12</td></tr><tr><td>14-15</td><td>10</td><td>11</td><td>12</td></tr><tr><td>16</td><td>11</td><td>12</td><td>13</td></tr><tr><td>17</td><td>12</td><td>13</td><td>14</td></tr><tr><td>20</td><td>14</td><td>15</td><td>16</td></tr><tr><td>25</td><td>17</td><td>20</td><td></td></tr><tr><td>30</td><td>21</td><td>24</td><td></td></tr><tr><td>35</td><td>25</td><td>28</td><td></td></tr><tr><td>40</td><td>29</td><td>30</td><td></td></tr></table>	V-Q	ZC	ZQ	W	6-7	5	6	7	8	6	7	8	9	7	8	9	10	8	9	10	12	9	10	12	14-15	10	11	12	16	11	12	13	17	12	13	14	20	14	15	16	25	17	20		30	21	24		35	25	28		40	29	30		选型方法 KV8-C10 ① 最小单位0.5 ② KV(KC)=0时, 键槽形状如上图: <table><tr><th>V-Q</th><th>b1</th><th>t1</th><th>公差</th><th>r1</th></tr><tr><td>6-7</td><td>2</td><td>1.2</td><td>±0.004</td><td>0.08</td></tr><tr><td>8-10</td><td>3</td><td>1.8</td><td>±0.029</td><td>-0.16</td></tr><tr><td>11-12</td><td>4</td><td>2.5</td><td>±0.030</td><td>0.16</td></tr><tr><td>13-17</td><td>5</td><td>3.0</td><td>±0.030</td><td>-0.25</td></tr><tr><td>18-22</td><td>6</td><td>3.5</td><td>±0.036</td><td>0.25</td></tr><tr><td>23-30</td><td>8</td><td>4.0</td><td>±0.036</td><td>-0.40</td></tr><tr><td>31-38</td><td>10</td><td>5.0</td><td>±0.036</td><td>0.25</td></tr><tr><td>39-40</td><td>12</td><td>5.0</td><td>±0.036</td><td>-0.40</td></tr></table>	V-Q	b1	t1	公差	r1	6-7	2	1.2	±0.004	0.08	8-10	3	1.8	±0.029	-0.16	11-12	4	2.5	±0.030	0.16	13-17	5	3.0	±0.030	-0.25	18-22	6	3.5	±0.036	0.25	23-30	8	4.0	±0.036	-0.40	31-38	10	5.0	±0.036	0.25	39-40	12	5.0	±0.036	-0.40
	V-Q	MC-MQ选择																																																																																																																																																									
6	3																																																																																																																																																										
7-8	3-4																																																																																																																																																										
9-10	3-5																																																																																																																																																										
12-14	3-4-5-6																																																																																																																																																										
15-16	3-4-5-6-8																																																																																																																																																										
17-18	3-4-5-6-8-10																																																																																																																																																										
20-22	3-4-5-6-8-10-12																																																																																																																																																										
25-28-30	3-4-5-6-8-10-12-16																																																																																																																																																										
32-35	3-4-5-6-8-10-12-16-20																																																																																																																																																										
36-40-50	3-4-5-6-8-10-12-16-20-24																																																																																																																																																										
V-Q	M×螺距																																																																																																																																																										
6	M6×0.75																																																																																																																																																										
8	M8×1.0																																																																																																																																																										
10	M10×1.0																																																																																																																																																										
12	M12×1.0																																																																																																																																																										
14	M14×1.0																																																																																																																																																										
15	M15×1.0																																																																																																																																																										
17	M17×1.0																																																																																																																																																										
20	M20×1.0																																																																																																																																																										
25	M25×1.5																																																																																																																																																										
30	M30×1.5																																																																																																																																																										
35	M35×1.5																																																																																																																																																										
40	M40×1.5																																																																																																																																																										
V-Q	ZC	ZQ	W																																																																																																																																																								
6-7	5	6	7																																																																																																																																																								
8	6	7	8																																																																																																																																																								
9	7	8	9																																																																																																																																																								
10	8	9	10																																																																																																																																																								
12	9	10	12																																																																																																																																																								
14-15	10	11	12																																																																																																																																																								
16	11	12	13																																																																																																																																																								
17	12	13	14																																																																																																																																																								
20	14	15	16																																																																																																																																																								
25	17	20																																																																																																																																																									
30	21	24																																																																																																																																																									
35	25	28																																																																																																																																																									
40	29	30																																																																																																																																																									
V-Q	b1	t1	公差	r1																																																																																																																																																							
6-7	2	1.2	±0.004	0.08																																																																																																																																																							
8-10	3	1.8	±0.029	-0.16																																																																																																																																																							
11-12	4	2.5	±0.030	0.16																																																																																																																																																							
13-17	5	3.0	±0.030	-0.25																																																																																																																																																							
18-22	6	3.5	±0.036	0.25																																																																																																																																																							
23-30	8	4.0	±0.036	-0.40																																																																																																																																																							
31-38	10	5.0	±0.036	0.25																																																																																																																																																							
39-40	12	5.0	±0.036	-0.40																																																																																																																																																							



请按图示订货

型号	D	L	F-S	V-Q 选择	X
LJF02	14	70~1000	3≤F≤V×8 3≤S≤Q×8	8 9 10	① 请根据使用要求指定尺寸。
LJF06	16	80~1200		8 9 10 12	

LJF02—D14—L150—F15—S20—V10—Q10—X50

② 可选加工

型号	D	L	F-S	V-Q 选择	X	可选加工代码
LJF02	14	70~1000	3≤F≤V×8 3≤S≤Q×8	8 9 10	① 请根据使用要求指定尺寸。	MC(I) MQ(I)...
LJF06	16	80~1200		8 9 10 12		

LJF02—D14—L150—F15—S20—V10—Q10—X50—MC5



未税价(元)

● 优惠价

数量	1~4	5~
价格	100%	另行报价



交货期

10

丝杠相关零件

E5