

双轴承法兰型

带挡圈L尺寸选择型

带座轴承

类型			材质		表面处理
圆法兰	方法兰	对边法兰	轴承	轴承座	挡圈
BFP01	BFP11	BFP21	钢	S45C	弹簧钢
BFP02	BFP12	BFP22			发黑
BFP03	BFP13	BFP23			无电解镀镍
BFP04	BFP14	BFP24	不锈钢	A2017	本色阳极氧化(哑光)
BFP06	BFP16	BFP26			—
				SUS304	—

① 由于产品批次不同，发货电镀产品可能存在喷细砂，不影响尺寸及功能。





② 轴承精度：GB/T 307.1 0 级
相当于：JIS B 1514 0 级



圆法兰
BFP01/02/03/04/06

方法兰
BFP11/12/13/14/16

对边法兰
BFP21/22/23/24/26

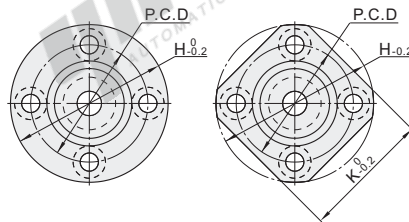

视角标准：第一视角

型号	L	d	DH7	B	V	H	W	T	dh	D197	P.C.D	K	A	F	d1	d2	H1
圆法兰																	
BFP01	623	20 30	3	10	+0.015 0	4		33	16	7	7	14	24	27	24		
BFP02	624	20 30	4	13				35	18		9	17	26	28	26		
BFP03	605	20 30	5	14	+0.018 0	5		36	20		10	18	30	30			
BFP04	625	25 30	5	16				38	22		12	20	28	31	28		
BFP06	606	20 35	6	17		2.65		39	23		13	21	29	32	29		
	626	25 35				6		41	25		15	24	31	34	31		
	698	25 35						45	29		18	27	35	36	35		
	608	25 35	8	22		7		47	32		20	30	37	37	37		
	628	25 35		24		8	2.85	45	32		20	30	35	36	35		
	6800	20 30		19		5		41	25		15	24	31	34	31		
	6900	25 40		22		6	2.65	45	29		19	27	35	36	35		
	6000	25 40	10	26	+0.021 0	8		50	34		22	32	40	39	40		
	6200	30 40		30		9		54	38		24	36	44	42	44		
	6801	25 35		21		5		44	29		17	26	34	35	34		
BFP01	6901	25 40	12	24		6		48	31		21	30	38	38	38		
BFP02	6001	25 40		28		8	2.85	52	36		24	34	42	40	42		
BFP03	6201	30 40		32	+0.025 0	10		56	40		26	38	46	43	46		
BFP04	6802	25 35		24		5		47	32		20	30	37	37	37		
BFP06	6902	※VV	15	28	+0.021 0	7		57	37		25	35	45	45	45		
	6002	(非接触式		32	+0.025 0	9		60	40		28	38	48	46	48		
BFP11	6202	橡胶密封圈)		35		11	3.75	64	44		29	42	52	49	52		
BFP12	6903			30	+0.021 0	7	2.85	60	38		10	27	48	46	48		
BFP13	6003	DD	17	35		10	3.75	66	44		31	42	54	50	54		
BFP14	6203	(接触式		40		12	3.95	72	50		34	48	60	54	60		
BFP16		橡胶密封圈)															
对边法兰	6804			32		7		60	40		28	38	48	46	38	29	
BFP21	6904			37		9	3.75	69	47		34	45	56	54	51	24	
BFP22	6004		20	42	+0.025 0	12	3.95	77	54		36	50	64	59	56	32	
BFP23	6204			47		14		81	58		40	54	68	62	59	34	
BFP24	6805			37		7	3.75	69	47		34	45	56	54	51	24	
BFP26	6905		25	42		9		77	54		36	50	64	59	56	32	
	6005			47		12	3.95	88	58		41	54	72	67	63	36	
	6205			52	+0.030 0	15	4.2	94	64		45	60	78	72	68	39	
	6806			42		7		77	54		36	50	64	59	56	32	
	6906			47	+0.025 0	9	3.95	88	58		41	54	72	67	63	36	
	6006			55		13		96	66		48	62	80	73	70	40	
	6206			62		16	4.2	104	74		55	70	88	79	77	44	
	6007		35	62		14											
	6207			72	+0.030 0	17	6	126	88		20	64	84	105	95	92	
	6008			68		15	5.2	114	82		13	60	78	96	86	80	
	6208		40	18		6		134	96		20	74	92	113	102	98	
	6010	ZZ		80		16											
	6210	(双盖式)	50	90	+0.035 0	20	7	147	110		83	106	126	126	104	72	

※ VV(非接触式橡胶密封圈)不适用于型号为623、624、605、606的轴承。 ※ VV(非接触式橡胶密封圈)、DD(接触式橡胶密封圈)、轴承材质为钢。

① 请注意避让挡圈，挡圈尺寸请参考P694。

② 可选加工

型号	L	可选加工
代码 轴承型号 密封圈	代码 轴承型号 密封圈	代码 轴承型号 密封圈
BFP01 6801 ZZ 25 35	BFP01 6801 ZZ 25 35	BFP01 6801 ZZ 25 35
BFP02 6901 DD 25 40	BFP02 6901 DD 25 40	BFP02 6901 DD 25 40

数量	1~9	10~
价格	100%	另行报价

未税价(元)

交货期

5



可选加工

可选加工	不装配轴承、挡圈
代码	NA

技术说明 不装配轴承及挡圈(附带出货)



请按图所示订货 BFP02—6901DD—L40

BFP02—6901DD—L40—NA

带座轴承 E6