

组合型·DB/DF配对·无密封圈


标准型 接触角25° P5精度

成对双联角接触球轴承



代码	类型		轴承类型 代码	轴承精度	轴承材质		接触角 (°)
	组合型	标准型			国标	相当	
BBQ	组合型	标准型	7	GB/T 307.1 5级	GCr15	SUJ2	25

① 出厂前未封入润滑脂，请在使用前封入。

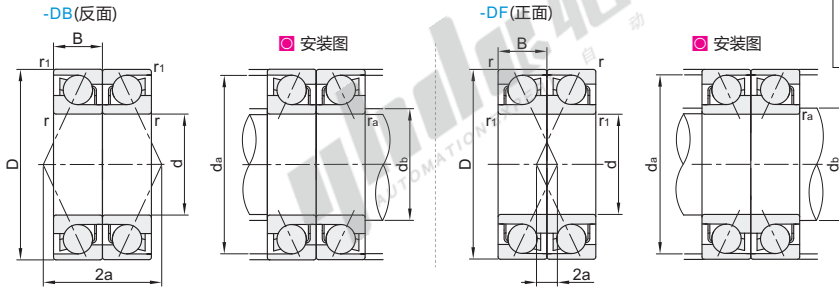

视角标准：第一视角

型号 代码 轴承型号	组合形式	d	D	B	r (min)	r1 (min)	基本额定负载 (KN)		容许转速 rpm(参考)		作用点a		安装尺寸						重量 kg (参考)	
							Cr(动)	Cor(静)	脂润滑	油润滑	DB	DF	da(min)	da(max)	fa(max)	db(min)	db(max)	fa(max)		
706		6	17	6		0.15	2.46	0.98	10000	15000	12	0.1	8	15.6		8	15		0.006	
708		8	22	7	0.3		3.73	1.54	7800	12000	14	0.2	10	20.6	0.3	10	20	0.15	0.012	
7000		26	8			0.15	8.75	5.2	20000	28000	18.4	2.2	12.5	24.8		11.2	23.5		0.02	
7200		30	9	0.6	0.3		8.8	5.4	18000	24000	20.5	2.8	15	27.5	0.6	12.5	25	0.3	0.03	
7001		28	8	0.3	0.15		9.4	5.95			19.5	3.9	14.5	26.8	0.3	13.2	25.5	0.15	0.02	
7201		10	32	10	0.6	0.3	13	8.05	16000	22000	22.7	2.7	17	29.5	0.6	14.5	27	0.3	0.04	
7002		9	0.3	0.15	9.95	6.85	15000				22.6	4.6	17.5	30.8	0.3	16.2	29.5	0.15	0.03	
7202		15	11	0.6	0.3		14	9.3			20000	25.4	3.7	20	32.5	0.6	17.5	30	0.3	0.05
7003		35	10	0.3	0.15	10.4	7.65		14000	19000	25.0	5.3	19.5	33.8	0.3	18.2	32.5	0.15	0.04	
7203		40	12	0.6	0.3	17.6	12	13000	17000	28.5	4.8	22	37.5		19.5	35		0.07		
7004		42	12				13.2	12000	16000	29.9	6.2	25	39.5	0.6			0.3			
7204		20	47	14	1	0.6	23.5	16.6	11000	15000	33.3	5.9	26	42	1	25	41	0.6	0.11	
7005		12	52	15	0.6	0.3	18.3	14.8	10000	14000	32.8	8.9	30	44.5	0.6	27.5	42	0.3	0.08	
7205		25	52	15			26.3	20.5	9500	13000	37.2	7.5	31	47		30	46		0.13	
7006		30	55	13			23.6	20.2	8500	12000	37.5	11.5		50			49	0.6	0.12	
7206		62	16		1		36.5	29.5	8000	11000	42.6	11	36			35		0.6	0.2	
7007		35	68	15			29.7	26.8	7500	10000	42	14.3	41	57			56	1	0.15	
7207		72	17	1.1			48.5	40	6700	9500	47.9	14.5	42	67		40	65		0.29	
7008		40	80	18	1.1	0.6	31.5	31		9000	46.2	16.3	46	63	1	45	62	0.6	0.19	
7208		80	18	1.1			57.5	50.5	6000	8500	52.6	16.7	47	75			73		0.38	
7009		45	75	16	1		37.5	37.5			50.7	18.7	51	70		50	69	1	0.25	
7209		85	19	1.1			64.5	57.5	5600	7500	56.5	18	52	80			78		0.41	
7010		50	80	16	1		40	42			53.5	21.8	56	75		55	74	0.6	0.26	
7210		90	20		1.1		67	63	5000	7100	60.4	20.7	57	85		51	83		0.47	
7011		55	100	18			52.5	55.5		6700	59.9	23.9	62			60		1	0.39	
7211		100	21	1.5	1		83	79	4500	6300	65.7	24.6	64	94	1.5	61	91	0.6	0.61	
7012	DB (反面)	60	95	18	1.1	0.6	53.5	59			62.7	26.8	67	90	1	66	88	1	0.42	
7212	DF (正面)	110	22	1.5	1		100	97.5	4300	6000	71.1	28.3	69	104	1.5		101	0.6	0.8	
7013		100	18	1.1	0.6		56.5	65.5			65.6	29.9	72	95	1	70	93	1.1	0.46	
7213		120	23	1.5	1		114	116	3800	5300	76.4	30.4	74	114	1.5	67	111	0.6	1.03	
7014		70	110	20	1.1	0.6	71.5	82.5	4000	5600	72	32	77	105	1	75	103	1	0.63	
7214		125	24	1.5	1		124	127	3600	5000	80.3	32.3	79	119	1.5	76	116	0.6	1.11	
7015		75	115	20	1.1	0.6	73	87.5	3800	5300	74.8	34.9	82	110	1	80	108	1.1	0.66	
7215		130	25	1.5	1		123	129	3600	4800	84.2	34.2	84	124	1.5	81	121	0.6	1.19	
7016		80	125	22	1.1	0.6	89.5	106			81.2	37.2	87	120	1	85	118		0.88	
7216		140	26	2	1		145	152	3200	4500	89.5	37.5	90	134	2	86	130	1	1.46	
7017		85	130	22	1.1	0.6	91.5	112	3400		84.1	40.7	92	125	1	90	123	1.1	0.91	
7217		150	28	2	1		167	178	3000		95.8	39.9	95	144	2	91	140	0.6	1.83	
7018		90	140	24	1.5	0.6	109	133	3200	4300	90.4	42.4	99	134	1.5	96	131		1.19	
7218		160	30	2	1		191	206	2800	4000	102.2	42.2	100	154	2	150		1	2.25	
7019		95	145	24	1.5		109	134	3800	5000	93.3	46.5	104	139	1.5	104	136	1.1	1.43	
7219		170	32	2.1	1.1		208	221	2600	3600	108.5	44.5	107	163	2	102	158	0.6	2.68	
7020		100	150	24	1.5	1	111	141	3600	5000	96.2	48.2	109		1.5	109	141		1.48	
7220		180	34	2.1	1.1		233	251	2600	3400	115.4	47.4	112	144		107	168	1	3.32	
7021		105	160	26	2	1	130	163	3400	4500	103.7	51.7	115	154		115	150	1.1	1.73	
7221		190	36	2.1	1.1		254	283	2400	3400	122.1	50.1	117	183		112	178	0.6	3.95	
7022		110	170	28	2	1	157	191	3200	4300	108.9	52.9	120	164		120	160		2.14	
7222		200	38	2.1	1.1		276	315	2200	3200	128.7	52.7	122	193	2	117	188	1	4.65	
7024		120	180	28	2	1	166	213	3000	4000	114.6	58.6	130	174		130	170	1.1	2.27	
7224		215	40	2.1	1.1		297	355	2600	3600	137	57	132	208		127	203	0.6	5.49	
7026		130	200	33	2	1	191	251			128.3	62.3	140	194		140	190		3.43	
7226		230	40	3	1.1		310	385	1900	2600	143.9	63.9	144	223	2.5	137	216	1	6.21	
7028		140	210	33	2	1	194	265	2600	3400	134.1	68.1	150	204	2	150	200	1.1	3.64	
7228		250	42	3	1.1		355	470	1800	2400	154.6	70.6	154	243	2.5	147	236	0.6	7.76	



请按图示订货



优惠价 数量 1~9 10~ 价格 100% 另行报价

交货期 5

1Kg=9.81N

BBQ7000DB

未税价(元)