



高速单列角接触球轴承
高速成对双联角接触球轴承

带密封圈
标准型 接触角15°




代码	类型			轴承类型 代码	轴承精度	后置代码	轴承材质		接触角
							国标	相当	
BBY06	高速单列角接触球轴承	单列型	标准型	7	GB/T307.1 4级	2RZ(双面带橡胶 密封圈非接触式)	GCr15	SUJ2	15°
BBY16	高速成对双联角接触球轴承	组合型							

高速单列角接触球轴承
BBY06

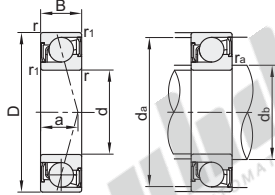

高速成对双联角接触球轴承
BBY16

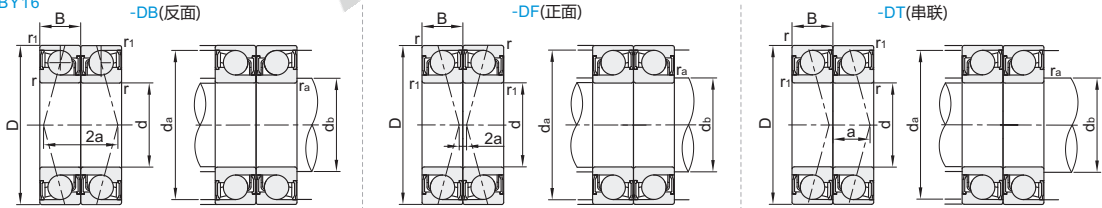

高速单列角接触球轴承

型号		d	D	B	r (min)	r1 (min)	基本额定负载(KN)		容许转速rpm(参考)		作用点a	安装尺寸			重量kg (参考)
代码	轴承型号						Cr(动)	Cor(静)	脂润滑	油润滑		da(min)	da(max)	ra(max)	
BBY06	7000-2RZ	10	26	8	0.3	0.15	5.3	2.49	45000	63000	6.4	12.5	23.5	0.3	0.02
	7200-2RZ		30	9	0.6	0.3	5.4	2.61	40000	56000	7.2	15	25	0.6	0.03
	7901-2RZ		24	6	0.3	0.15	3.35	18.6	45000	63000	5.4	14.5	21.5	0.3	0.01
	7001-2RZ	12	28	8			5.8	2.9	40000	56000	6.7	17	25.5	0.3	0.02
	7201-2RZ		32	10	0.6	0.3	7.9	3.85	36000	50000	7.9		27	0.6	0.04
	7902-2RZ		28	7			4.75	2.64	38000	53000	6.4		25.5	0.3	0.02
	7002-2RZ	15	32	9	0.3	0.15	6.25	3.4	34000	48000	7.6	20	29.5	0.3	0.03
	7202-2RZ		35	11	0.6	0.3	8.65	4.55	32000	45000	8.8		30	0.6	0.05
	7903-2RZ		30	7			5	2.94	34000	48000	6.6		27.5	0.3	0.02
	7003-2RZ	17	35	10	0.3	0.15	6.6	3.8	32000	43000	8.5	22	32.5	0.3	0.04
	7203-2RZ		40	12	0.6	0.3	10.9	5.85	28000	38000	9.8		35	0.6	0.07
	7904-2RZ		37	9	0.3	0.15	6.95	4.25		8.3	34.5		0.3	0.04	
	7004-2RZ	20	42	12	0.6	0.3	14.5	8.3		26000	36000	10.1	25	37	0.6
	7204-2RZ		47	14	1	0.6	14.6	8.05	24000	11.5	26	41	1	0.1	
	7905-2RZ		42	9	0.3	0.15	7.85	5.4		9	27.5	39.5	0.3	0.04	
	7005-2RZ	25	47	12	0.6	0.3	11.7	7.4		30000	10.8	30	42	0.6	0.08
	7205-2RZ		52	15	1	0.6	16.6	10.2	22000	12.7	31	46	1	0.13	
	7906-2RZ		47	9	0.3	0.15	8.3	6.25	22000	9.7	32.5	44.5	0.3	0.05	
	7006-2RZ	30	55	13			15.1	10.3	19000	26000	12.2	36	49		0.12
	7206-2RZ			16			23	14.7	18000	24000	14.2				0.2
	7007-2RZ		35	62	14	1	0.6	19.1	13.7	17000	22000	13.5	41	56	1
	7008-2RZ	40	68	15			20.6	15.9	15000	20000	14.7	46	62		0.21
	7009-2RZ	45	75	16			24.4	19.3	14000	19000	16	51	69		0.27

高速成对双联角接触球轴承

1Kg f=9.81N

型号		组合形式	d	D	B	r (min)	r1 (min)	基本额定负载 (kN)		容许转速 rpm(参考)		作用点a			安装尺寸									重量 kg (参考)
代码	轴承型号							Cr(动)	Cor(静)	脂润滑	油润滑	DB	DF	DT	DB			DF			DT			
												db min	da max	ra max	db min	da max	ra max	db min	da max	ra max	db (min)	da (max)	ra (max)	
BBY16	7000-2RZ	DB (反面)	10	26	8	0.3	0.15	8.65	5	36000	50000	12.8	3.2	6.4	12.5	24.8	0.3	11.2	23.5	0.15	12.5	23.5	0.3	0.04
	7200-2RZ			30	9	0.6	0.3	8.8	5.2	32000	45000	14.4	3.6	7.2	15	27.5	0.6	12.5	25	0.3	15	25	0.6	0.06
	7901-2RZ	DB (反面)	12	24	6	0.3	0.15	5.45	3.7	36000	50000	10.8	1.2	5.4	14.5	22.8	0.3	14	21.5	0.15	14.5	21.5	0.3	0.02
	7001-2RZ			28	8			9.4	5.8	32000	45000	13.4	2.6	6.7	14.5	26.8	0.3	13.2	25.5	0.15	14.5	25.5	0.3	0.04
	7201-2RZ	DB (反面)	12	32	10	0.6	0.3	12.8	7.7	30000	40000	15.9	4.1	7.9	17	29.5	0.6	14.5	27	0.3	17	27	0.6	0.07
	7902-2RZ			28	7			7.75	5.3			43000	12.8	1.2	6.4		26.8		17	25.5			25.5	
	7002-2RZ	DB (反面)	15	32	9	0.3	0.15	10.1	6.75	28000	38000	15.3	2.7	7.6	17.5	30.8	0.3	16.2	29.5	0.15	17.5	29.5	0.3	0.06
	7202-2RZ			35	11	0.6	0.3	14.1	9.05	26000	36000	17.7	4.3	8.8	20	32.5	0.6	17.5	30	0.3	20	30	0.6	0.09
	7903-2RZ	DB (反面)	17	30	7	0.3	0.15	8.15	5.85	28000	38000	13.3	0.7	6.6	19.5	28.8	0.3	19	27.5	0.15	19.5	27.5	0.3	0.03
	7003-2RZ			35	10			10.7	7.6	26000	34000	17	3	8.5		33.8	0.3	18.2	32.5			32.5	0.3	0.08
	7203-2RZ	DF (正面)	17	40	12	0.6	0.3	17.6	11.7		19.6	4.4	9.8	22	37.5	0.6	19.5	35	0.3	22	35	0.6	0.13	
	7904-2RZ			37	9	0.3	0.15	11.3	8.5	22000	32000	16.6	1.4	8.3	22.5	35.8	0.3	22	34.5	0.15	22.5	34.5	0.3	0.07
	7004-2RZ	DF (正面)	20	42	12	0.6	0.3	18	13.1	20000	30000	20.3	3.7	10.1	25	39.5	0.6	22.5	37	0.3	25	37	0.6	0.14
	7204-2RZ			47	14	1	0.6	23.6	16.1		23	5	11.5	26	42	1	25	41	0.6	26	41	1	0.21	
	7905-2RZ	DT (串联)	25	42	9	0.3	0.15	12.7	10.8	19000	26000	18	0.1	9	27.5	40.8	0.3	27.5	39.5	0.15	27.5	39.5	0.3	0.09
	7005-2RZ			47	12	0.6	0.3	19	14.8	18000	21.6	2.4	10.8	30	44.5	0.6	27.5	42	0.3	30	42	0.6	0.16	
	7205-2RZ	DT (串联)	30	52	15	1	0.6	27	20.4		25.3	4.7	12.7	31	47	1	30	46	0.6	31	46	1	0.26	
	7906-2RZ			47	9	0.3	0.15	13.5	12.5	17000	19.3	1.3	9.7	32.5	45.8	0.3	32.5	44.5	0.15	32.5	44.5	0.3	0.1	
	7006-2RZ	DT (串联)	30	55	13			24.6	20.5	15000	22000	24.4	1.6	12.2	36	50		35	49			36	49	0.23
	7206-2RZ			62	16			37.5	29.3	14000	20000	28.3	3.7	14.2	36	57		46	56			36	56	0.39
	7007-2RZ	DT (串联)	35	62	14	1	0.6	31	27.3	13000	19000	27	1	13.5	41		40	56	1	41			1	0.31
	7008-2RZ			40	68	15		33.5	32	12000	17000	29.5	0.5	14.7	46	63		45	62	0.6	46	62		0.43
	7009-2RZ	DT (串联)	45	75	16			39.5	38.5	11000	15000	32.1	0.1	16	51	70		50	69	1	51	69		0.55

高速单列角接触球轴承

高速成对双联角接触球轴承

1Kg f=9.81N



请按图示订货

代码	轴承型号	d	D
BBY06	7000-2RZ	10	26
	7200-2RZ	30	30

BBY06 — 7000-2RZ

代码	轴承型号	组合形式
BBY16	7000-2RZ	DB DF DT
	7200-2RZ	DB DF DT

BBY16 — 7000DB-2RZ



未税价(元)

优惠价	数量	1~9	10~
	价格	100%	另行报价



交货期

6