



# 倍速链回程导轨

| 代码    | 类型      | 材质       | 颜色 |
|-------|---------|----------|----|
| VMH01 | 倍速链回程导轨 | 超高分子量聚乙烯 | 白色 |

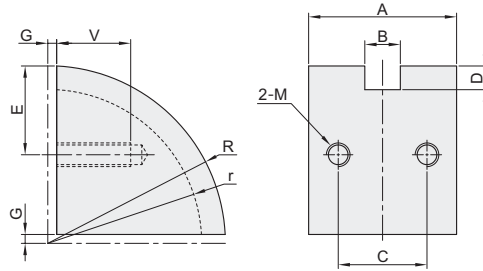

视角标准：第一视角

| 型号    |      |       | A  | B  | C  | D    | E  | M  | r    | R  | V  | G |
|-------|------|-------|----|----|----|------|----|----|------|----|----|---|
| 代码    | 倍速链  | 规格    |    |    |    |      |    |    |      |    |    |   |
| VMH01 | BS25 | C206B | 34 | 9  | 22 | 6    | 31 | M6 | 54   |    |    |   |
|       |      | C208A | 50 | 12 | 30 | 8    | 30 |    | 52   | 60 |    |   |
|       |      | C210A | 56 | 15 | 35 | 10   |    |    | 50   |    |    |   |
|       |      | C212A | 60 | 18 | 39 | 12.5 | 32 | M8 | 47.5 |    |    |   |
|       | BS30 | C216A | 70 | 23 | 45 | 15   | 41 |    | 65   | 80 |    |   |
|       |      | C206B | 34 | 10 | 22 | 9    | 31 | M6 | 51   | 60 | 25 | 3 |
|       |      | C208A | 50 | 14 | 30 | 12   | 30 |    | 48   |    |    |   |
|       |      | C210A | 56 | 17 | 35 | 14   |    |    | 40   | 64 |    |   |
|       |      | C212A | 60 | 23 | 39 | 17   | 32 | M8 | 43   | 60 |    |   |
|       |      | C216A | 70 | 28 | 45 | 20   | 41 |    | 60   | 80 |    |   |



请按图示订货

| 代码    | 倍速   | 规格    |
|-------|------|-------|
| VMH01 | BS25 | C206B |
|       |      | C208A |

VMH01—BS25—C206B

可选加工

| 代码    | 倍速   | 规格    | 可选加工代码 |
|-------|------|-------|--------|
| VMH01 | BS25 | C206B | LB     |
|       |      | C208A |        |

VMH01—BS25—C206B—LB



未税价(元)

优惠价

| 数量 | 1~9  | 10~  |
|----|------|------|
| 价格 | 100% | 另行报价 |



交货期

7




可选加工

| 代码 | 技术说明 |
|----|------|
|----|------|

出厂时支架安装在回程导轨上

选型方法 LB

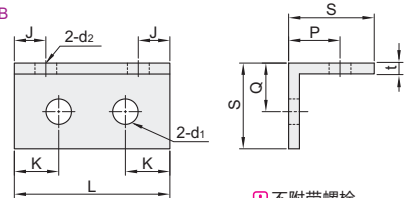

① 不附带螺栓

① 材质：A6063-T5

LB

| 倍速   | 规格    | S  | t | L   | d1  | d2  | K    | J    | P  | Q  |
|------|-------|----|---|-----|-----|-----|------|------|----|----|
| BS25 | C206B | 25 | 3 | 34  | 6.5 | 6.5 | 6    | 6.75 | 18 |    |
|      | C208A | 30 |   | 60  |     |     | 15   | 7.75 | 20 |    |
|      | C210A |    |   | 76  | 8.5 | 8.5 | 20.5 | 10.3 |    | 17 |
|      | C212A | 40 | 5 | 93  |     |     | 27   |      | 30 |    |
| BS30 | C216A |    |   | 98  |     |     | 26.5 | 14   |    |    |
|      | C206B | 25 | 3 | 38  | 6.5 | 6.5 | 8    | 6.25 | 18 | 15 |
|      | C208A | 30 |   | 67  |     |     | 18.5 | 8.25 | 20 |    |
|      | C210A |    |   | 80  | 8.5 | 8.5 | 22.5 | 10   |    | 16 |
|      | C212A | 40 | 5 | 102 |     |     | 31.5 |      | 30 |    |
|      | C216A |    |   | 100 |     |     | 27.5 | 15   |    | 17 |